



规格书

SPECIFICATION

CUSTOMER NAME	客户名称:	
CUSTOMER NO.	客户编号:	
SERIES	系 列:	按键开关卧式
MODEL NO.	型 号:	XB-PBS-22D06
DRAWING NO.	图 形 号:	Puhs Switch horizontal type

If specification of this product meets your request, please confirm all the items of it and return to us with signature and stamp, it will be basis of our production and record. Thanks your cooperation in advance!

若此产品规格符合贵司要求，敬请确认此规格书内所有项目
并签名和盖章后回传给我司，以作我司产品制作之

依据和存档之用，多谢合作！

EXAMINE & APPROVAL 审批

APPROVE 接受	NOT APPROVE 不接受
SIGNATURE 签署 STAMP 盖章 DATE 日期	

PREPARED BY.制表人	CHECKED BY.校对	APPROVED BY.审核	APPROVAL BY.批准
研发部 戴海明 2022. 06. 08	品质部 黄自清 2022. 06. 08	工程部 庞军 2022. 06. 08	总经办 吴量 2022. 06. 08

东莞市溪榜电子有限公司

Dong guan Xi Bang Electronics Co., Ltd

地址：广东省东莞市黄江镇合路工业区

**Address:He Lu Industrial Zone, Huangjiang Town
Dongguan City, Guangdong Province**

Tel: (0769)82055138/82056828

Fax:(0769)83663452

邮箱: admin@alspr.com switch@alspr.com

<http://www.alpsr.cn/> <http://www.alpsr.com/>

Dong Guan XB ElectronicsCo., Ltd

AccountNumber: 705540238

BankName: CitibankN.A.,HongKongBranch

Country/Region: Hong Kong






BankCode:006

BankAddress: 3GardenRoad, Central, Hong Kong

SWIFT/BIC: CITIHKHX (CITIHKHXXXX*If 11 characters are required)

MAIL: HK@ALPSR.CN XB@ALPSR.CN

Quality core! Afterburner for Made in China!

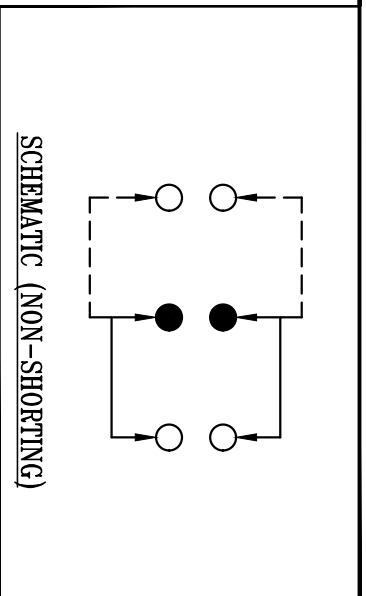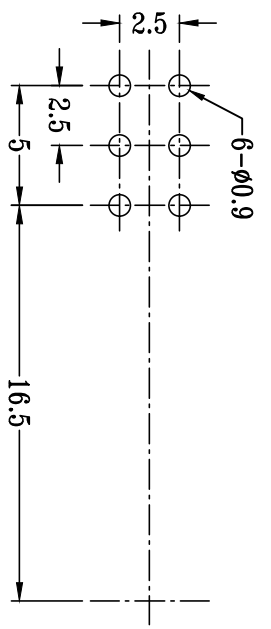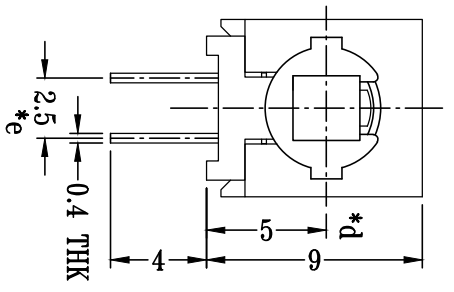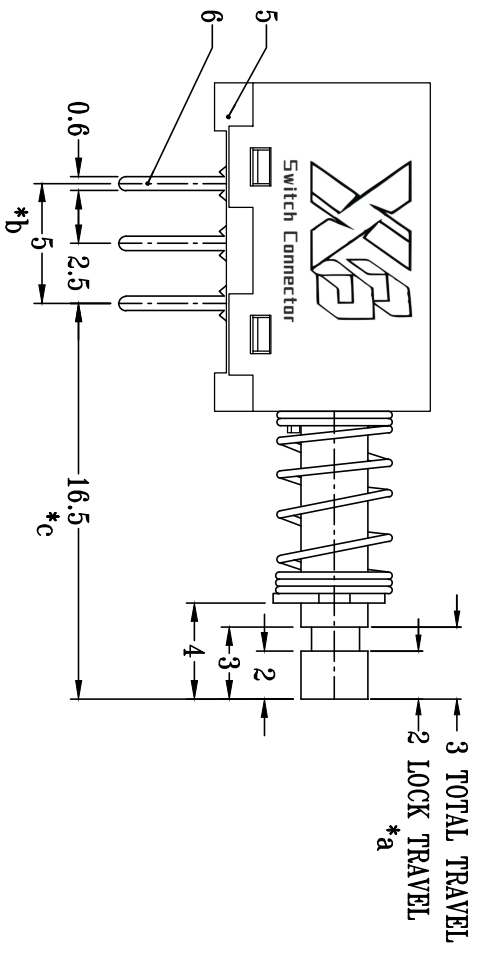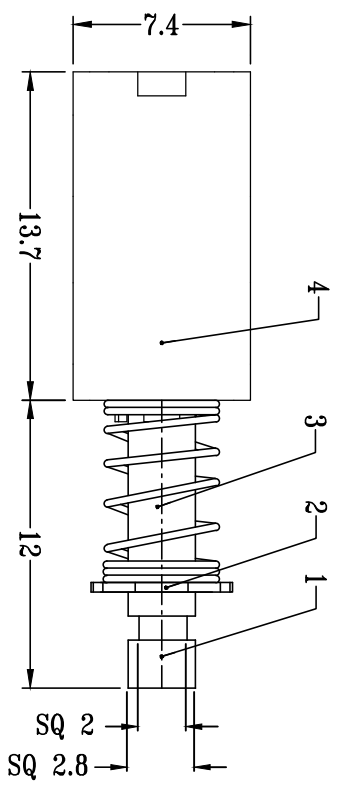

10			
9	SPRING PLATE	PBS STRIP	1 NATURAL
8	CONTACT CLIP	PBS C3210R-EH	2 Ag CLAD
7	CAM STICK	BRASS WIRE	1 Ni PLATED
6	TERMINAL	BRASS STRIP	6 Ag PLATED
5	BASE	PPA	1 BLACK
4	COVER	PC	1 BLUE
3	SPRING	STEEL WIRE	1 Ni PLATED
2	BLOCK	STEEL STRIP	1 Ni PLATED
1	KNOB	PA66	1 BLACK
NO.	PARTS	MATERIALS	Q'TY FINISH

TOLERANCE				
UNLESS SPECIFIED				
WITHIN 1.5mm : ±0.1mm		A	2019-08-01	
OVER 1.5mm : ±0.2mm		ISSUE	DATE	
TITLE : PLASTIC PUSH SWITCH		UNIT : mm		
MODEL: XB-PBS-22D06		SCALE: 3:1		
		DRWG NO.: XB-PBS-22D06		
		DWN.	余丽珍	2019-08-01
		CHK'D	CHEN ZENQ	2019-08-01
		APPD.		
		DRWG NO.: XB-PBS-22D06		
		CHEN ZENQ		
		APPD.		
		2019-08-01		

注: "*"表示关键尺寸(5个).

P.C.B LAYOUT
BOTTOM VIEW

 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.		文件编号	XB-SP-6106
		发布日期	2019 年 12 月 25 日
SPECIFICATION 规格书		第 A 版	第 1 页 共 3 页
MODEL NO. 产品名称: XB-PBS-22D06			
DRAWN 制订		庞东	APPD. 审核 贺飞龙
1、RATING (额定值)		:DC 0.3A 50V	
2、FUNCTION (接触型式)		: 4P2T	
3、TIMING (时间特性)		: NON-SHORTING	
4、ELECTRICAL CHARACTERISTICS (电气性能规格)			
ITEM 项目		TEST CONDITIONS 测试条件	PERFORMANCE 规格
4.1	CONTACT RESISTANCE 接触电阻	MEASURED AT 1KHz SMALL CURRENT (100mA OR LESS) 在 1KHz 微小电流 (100mA 以下) 测试.	50mΩ MAX. 50 毫欧以下
4.2	INSULATION RESISTANCE 绝缘电阻	APPLY A VOLTAGE OF 500V DC FOR 1 MIN. TO FOLLOWING PORTIONS AFTER WHICH MEASUREMENT SHALL BE MADE. (1) BETWEEN BODY AND TERMINAL。 (2) BETWEEN TERMINALS。 输入 500V DC 电压 1 分钟, 按以下接触方法测试: (1) 排脚相互之间。 (2) 排脚与外壳之间。	100MΩ MIN. 100 兆欧以上.
4.3	DIELECTRIC STRENGTH 耐电压	AC 500V rms (50-60Hz) FOR 1 MIN TRIP CURRENT: 0.5mA (1) BETWEEN TERMINALS. (2) BETWEEN INDIVIDUAL TERMINAL AND FRAME. 输入 AC 500V (50-60Hz) 电压, 1 分钟感度电流为 0.5mA, 按以下接触方法测试: (1) 排脚相互之间 (2) 排脚与外壳之间.	WITHOUT DAMAGE TO PARTS ARCING OR BREAKDOWN ETC 没有绝缘破坏等异常
5、MECHANICAL CHARACTERISTICS (机械性能规格)			
ITEM 项目		TEST CONDITIONS 测试条件	PERFORMANCE 规格
5.1	OPERATING FORCE 作动力	A STATIC LOAD SHALL BE APPLIED TO THE TIP OF ACTUATOR IN OPERATING DIRECTION. 沿动作方向推动胶柄至接近底部时之数值.	350±100gf
5.2	TERMINAL STRENGTH 端子强度	A STATIC LOAD OF (300gf) SHALL BE APPLIED TO THE TERMINAL FOR 15 SEC, IN ANY DIRECTION. 在排脚前端任意一个方向加 300gf 力度测试, 时 间为 15 秒.	MECHANICAL AND ELECTRICAL CHARACTERISTICS SHALL BE SATISFIED WITHOUT LOOSENESS OF ACTUATOR. 在端子中没有裂开, 松动等 异常, 满足于机械、电器性 能。
5.3	DISPLACEMENT OF ACTUATOR (KNOB) 柄强度	A STATIC LOAD OF 10N (1Kg) SHALL BE APPLIED TO THE TOP OF THE ACTUATOR (KNOB) AND THEN DISPLACEMENT SHALL BE MEASURED TO THE DIRECTION OF THE ARROW. 在柄的前端施加 1Kg 的力度, 位移应沿印记的方 向上定.	THE LEVER SHALL HAVE NO SERIOUS DEFORMATION AND FUNCTION IS NORMALLY. 柄部无严重变形, 可以正常 工作.

 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.		文件编号	XB-SP-6106										
		发布日期	2019 年 12 月 25 日										
SPECIFICATION 规格书		第 A 版	第 2 页 共 3 页										
6、ENDURANCE CHARACTERISTICS（耐久性）：													
ITEM 项目		TEST CONDITIONS 测试条件		PERFORMANCE 规格									
6.1	LIFE TEST 寿命试验	WITHOUT LOAD: AN ACTUATOR SHALL BE SUBJECT TO 10,000 CYCLES AT A SPEED OF 15 TO 18 CYCLES FOR 1 MIN. 无负荷: 操作者以每分钟 15—18 回的频率作 10,000 回之无负荷测试.		(1) CONTACT RESISTANCE(接触电阻) 200mΩ MAX. 200 毫欧以下. (2) INSULATION RESISTANCE(绝缘电阻) 50MΩ MIN. 50 兆欧以上. (3) WITHSTAND VOLTAGE(耐电压) AC 500V, 1 MINUTE. AC 500V 1 分钟 (4) OPERATING FORCE(作动力) ±30%INITIAL VALUE. 变化范围初始值±30% (5) WITHOUT DAMAGE TO PARTS ARCING OR BREAKDOWN ETC. (测试后外表无损伤,并且满足机械性能)									
6.2	SOLDERABILITY TEST 可焊性试验	THE TOP OF THE TERMINALS SHALL BE DIPPED 2mm IN THE SOLDER BATH OF 260±5℃ FOR 3±0.5 SECONDS. 端子顶部被浸入锡焊池中 2mm 深,温度为 260±5℃,时间为 3±0.5 秒.		THE AREA OF SOLDERING SHOULD BE OVER 90% 焊接面积要有 90%以上.									
6.3	RESISTANCE TO SOLDERING HEAT TEST 耐焊性试验	(1)TEMPERATURE AND IMMERSING TIME 温度及浸锡时间 <table><tr><td></td><td>TEMPERATURE 温度 (℃)</td><td>TIME 时间 (S)</td></tr><tr><td>DIP SOLDERING 浸 锡</td><td>260±5</td><td>3±0.5</td></tr><tr><td>MANUAL SOLDERING 手 焊</td><td>350±10</td><td>3±0.5</td></tr></table> (2) IMMERSION DEPTH: IMMERSION DEPTH UP TO THE SURFACE OF THE BOARD THICKNESS OF PRINTED WIRING BOARD 1.6mm. 浸锡深度: 浸锡深度至基板(PCB)表面,基板厚度为 1.6mm. (3) WAVE SOLDERING 波峰焊 (A)温度 260±5℃ ,时间 3±0.5 秒. (B)PREHEAT TIME SHALL BE 150 SECONDS MAX. AT 100℃MAX. 预热温度 100℃以下, 150 秒以内完成.			TEMPERATURE 温度 (℃)	TIME 时间 (S)	DIP SOLDERING 浸 锡	260±5	3±0.5	MANUAL SOLDERING 手 焊	350±10	3±0.5	THERE SHALL BE NO DEFORMATION OR CRACKS IN MOLDED PART. 外观无异常,满足于机械、电器性能。
	TEMPERATURE 温度 (℃)	TIME 时间 (S)											
DIP SOLDERING 浸 锡	260±5	3±0.5											
MANUAL SOLDERING 手 焊	350±10	3±0.5											
6.4	COLD TEST 耐冷试验	THE SWITCH SHALL BE STORED AT A TEMPERATURE OF -25±3℃ FOR48HOURS. THEN THE SWITCH SHALL BE MAINTAINED AT STANDARD ATMOSPHERIC CONDITIONS FOR 1 HOUR AFTER WHICH MEASUREMENT SHALL BE MADE. 放置在温度-25±3℃中 48 小时后,再将放置在常温常湿的环境中 1 小时后进行测试.											

 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.		文件编号	XB-SP-6106
		发布日期	2019 年 12 月 25 日
SPECIFICATION 规格书		第 A 版	第 3 页 共 3 页
ITEM 项目		TEST CONDITIONS 测试条件	PERFORMANCE 规格
6.5	HEAT TEST 耐热试验	THE SWITCH SHALL BE STORED AT A TEMPERATURE OF $70\pm 2^{\circ}\text{C}$ FOR 48 HOURS. THEN THE SWITCH SHALL BE MAINTAINED AT STANDARD ATMOSPHERIC CONDITIONS FOR 1 HOUR AFTER WHICH MEASUREMENT SHALL BE MADE. 放置在温度 $70\pm 2^{\circ}\text{C}$ 中测试 48 小时后, 再将放置在常温常湿的环境中 1 小时后进行测试.	THERE SHALL BE NO DEFORMATION OR CRACKS IN MOLDED PART. 外观无异常, 满足于机械、电器性能.
6.6	HUMIDITY TEST 潮湿试验	THE SWITCH SHALL BE STORED AT A TEMPERATURE OF $40\pm 2^{\circ}\text{C}$ AND A HUMIDITY OF 90% TO 95% FOR 96 HOURS. THEN THE SWITCH SHALL BE MAINTAINED AT STANDARD ATMOSPHERIC CONDITION FOR 1 HOUR AFTER WHICH MEASUREMENT SHALL BE MADE. 放置 $40\pm 2^{\circ}\text{C}$ 的相对湿度为 90%~95% 环境中 96 小时后, 再将放置在常温常湿的环境中 1 小时后进行测试.	
6.7	STANDARD ATMOSPHERIC CONDITIONS 测试标准状态	UNLESS OTHERWISE SPECIFIED. THE STANDARD RANGE OF ATMOSPHERIC CONDITIONS FOR MAKING MEASUREMENTS AND TESTS ARE AS FOLLOWS: (1) AMBIENT HUMIDITY: 5°C TO 35°C (2) RELATIVE HUMIDITY: 45% TO 85% (3) AIR PRESSURE : 86Kpa TO 106Kpa 在没有指定的情况下测试温度、湿度、气压如下: (1) 温度为 5°C—35°C. (2) 湿度为 45%—85%. (3) 气压为 86Kpa—106Kpa.	
6.8	PRACTICAL TEMPERATURE RANGE 使用温度范围	-16°C~$+60^{\circ}\text{C}$. 在 -16°C~$+60^{\circ}\text{C}$ 温度内使用.	



东莞市溪榜电子有限公司

產品試驗報告 TEST REPORT

PAGE: 2 OF: 2

产品型号 (MODEL NO.): XB-PBS-22D06

编号 (REF NO.): XB-PBS-20200429-01

■ 试验后的测试数据 (MEASURING DATA AFFTER TEST)

□ 寿命试验: (试 5K 回, 以 15-18 回/分的速度, 空载/负载: 空载)
AFFTER LIFE TEST: (cycles, 15-18 cycles/min, With load/Without load)

	作 动 力 OPERATING FORCE				接 触 电 阻 CONTACT RESISTANCE												绝缘电阻 INSULATION RESISTANCE	耐电压 WITHSTAND VOLTAGE
规格 SPEC	350±100 gf				200 mΩ 以下 (max)												超过50MΩ OVER	AC500V1min 试1分钟
NO.	T1→2	T2→3	T3→4	2←T1	A1	B1	C1	D1	A2	B2	C2	D2	A3	B3	C3	D3		
1	390			385	11	13	16	17	24	12	11	40					>50	OK
2	380			375	17	22	22	25	44	107	13	16					>50	OK
3	390			380	19	30	23	16	18	20	44	13					>50	OK

□ 寿命试验: (试 10K 回, 以 15-18 回/分的速度, 空载/负载: 空载)
AFFTER LIFE TEST: (cycles, 15-18 cycles/min, Without load/ With load)

	作 动 力 OPERATING FORCE				接 触 电 阻 CONTACT RESISTANCE												绝缘电阻 INSULATION RESISTANCE	耐电压 WITHSTAND VOLTAGE
规格 SPEC	350±100 gf				200 mΩ 以下 (max)												超过50MΩ OVER	AC500V1min 试1分钟
NO.	T1→2	T2→3	T3→4	2←T1	A1	B1	C1	D1	A2	B2	C2	D2	A3	B3	C3	D3		
1	390			410	12	16	24	29	13	14	17	77					>50	OK
2	380			400	17	37	41	37	61	138	22	20					>50	OK
3	395			380	13	25	36	45	44	70	38	64					>50	OK

□ 寿命测试结果:
THE LIFE TEST RESULT:

NO.	测试项目 TEST ITEM	操作动力 OPERATING FORCE	接 触 电 阻 CONTACT RESISTANCE	绝缘电阻 INSULATION RESISTANCE	耐电压 WITHSTAND VOLTAGE
1	空载寿命 Without load	√	√	√	√
2	负载寿命 With load				

以上单项性能合格在空格内打“√”，单项性能不合格在空格内打“×”。

Single performance qualified in the space “√”，Single performance no qualified “×”。

试验结果: ■ 合格 □ 不合格
TEST RESULT: □ Qualified □ No Qualified

不合格原因简述:
No Qualified Description:



產品試驗報告 TESTREPORT

PAGE: 1 OF: 2

产品型号:	XB-PBS-22D06	编号: XB-PBS-20200429-
MODELNO:		01REFNO:
测试员: 庞东	审核: 贺飞龙	日期: 2020-04-29
TESTER:	APPROVAL:	DATE:

■ 试验前测试数据 (MEASURINGDATAFORETEST)

[illegible]

(普通开关類)