


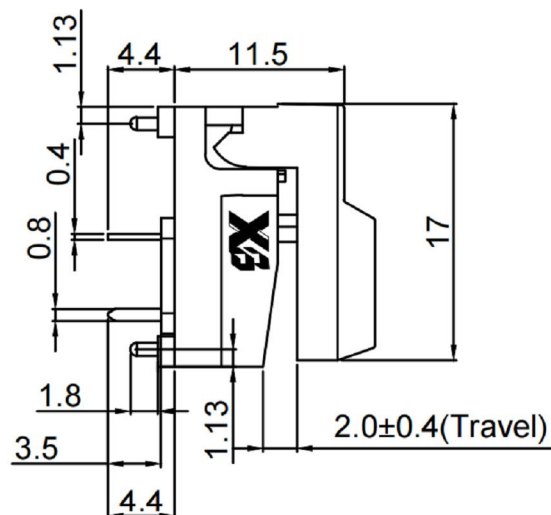
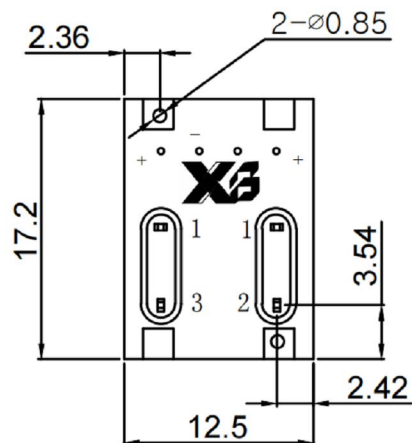





ROHS



Circuit Diagram

Y	Yellow	黄色
W	White	白色
U	Blue	蓝色
R	Red	红色
O	Orange	橙色
G	Green	绿色
B	Black	黑色
A	Gray	灰色
CAP COLOR (X)		

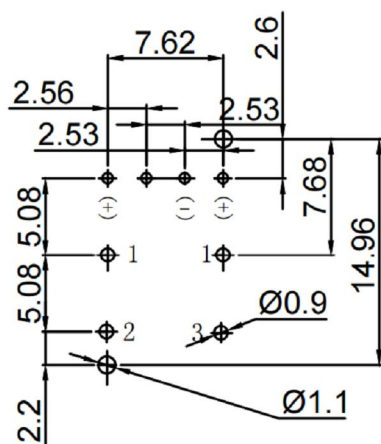

P.C.B . Layout

Specifications

Circuit

Current rating

Voltage rating

Dielectric withstanding voltage :250VAC for 1 minute

Contact resistance : 100m Ω Max. (Initial)

Insulation resistance	:100M Ω	Min.
-----------------------	----------------	------

Operating force :150±50gf

Travel :2.0mm±0

Operating life	:50,000 cycles M
----------------	------------------

Solder specifications	:260° C for 5 sec
-----------------------	-------------------

Function: Momentary

Operating temperature : +10° C ~ +

Operating temperature

MATERIAL

Base:Nylon66, UL rated: 94V-2 Min.;

Cap: ABS;

Terminal: Phosphor bronze, Golden plated.



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : XB TACT SWITCH

MODEL : XB-PB-86-A0



TOLERANCE

$\leq 1.5\text{mm}$	± 0.1
$> 1.5\text{mm}$	± 0.2
$> 10.0\text{mm}$	± 0.3

ANGLE TOL
 $\pm 2^\circ$

8	REEL	PS	1	BLUE
7	CARRIER	PS	1	CLEAR
6	COVER TAPE	PS	1	CLEAR
5	CONTACT	PBS STRIP	1	Ag CLAD
4	COVER	IRON STRIP	1	Ni PLATED
3	CASE	NYLON	1	BLACK
2	TERMINAL	BRASS STRIP	2	Ag PLATED
1	KNOB	NYLON	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING