

REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEYI		2012/05/25

NOTES:

- CONTACT CURRENT RATING: 1A.
- CONTACT RESISTANCE: 50 mΩ MAX.;
- INSULATION RESISTANCE: 1000 Ω MIN.;
- DIELECTRIC WITHSTANDING: 500V AC MIN.;
- DURABILITY: 5,000 CYCLES MIN.;
- CONNECTOR MATING FORCES: 29.4N (3.00Kgf) MAX.;
- CONNECTOR UNMATING FORCES: 2.94N (0.30Kgf) MIN.;

PRODUCT NO.

PJ18-05 A B 03-09

① ② ③ ④

① PRODUCT SERIES:

PJ18: PHONE JACK CONNECTOR

② PIN NO.:


05: 5PIN







③ MATERIAL:

A: PA9T


④ SERIES NO.:

09: 反向沉板1.05H


CUSTOMER DRAWING		 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.										
GENERAL TOLERANCE X. .X ±0.20 .XX ±0.15 .XXX ±0.10		DRAWING	DEYI			TITLE: Ø3.50mm PHONE JACK CONNECTOR TYPE2 反向沉板1.05H						
		APPROVED				P/N: XB-PJ18-05AB03-09						
ANGEL TOLERANCE X. ±3° .XX ±2° .XXX ±1°		DATE	2018.04.30			DRAWING NO. XB-C-PJ18-09						
			UNIT	mm	SCALE	1:1	SIZE	A4	SHEET	1of1	REV	A

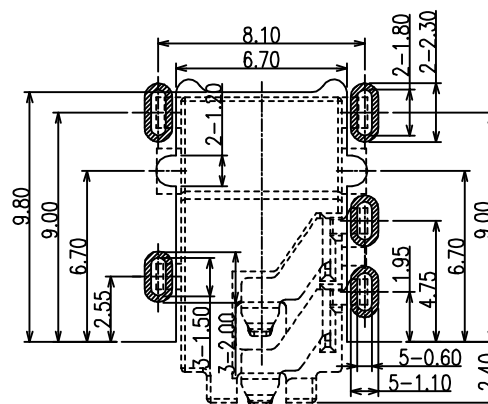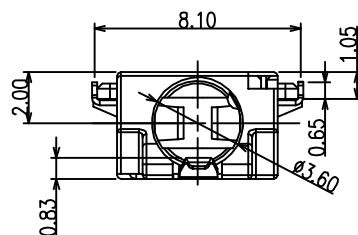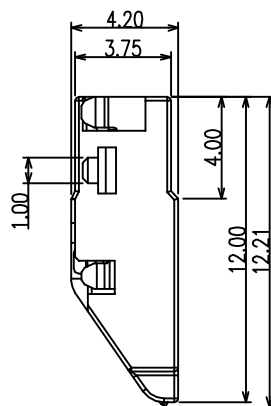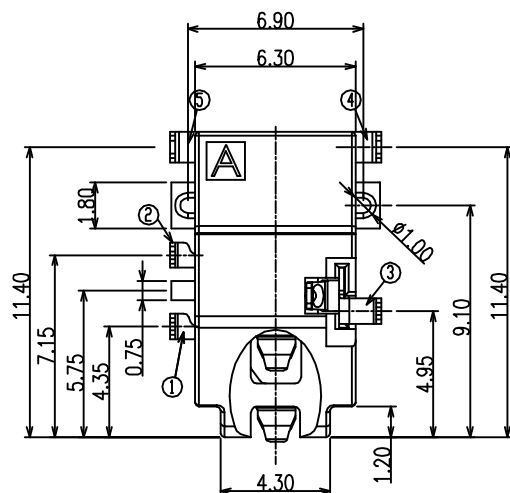

RECOMMENDED PCB LAYOUT(TOP VIEW)
(GENERAL TOLERANCE0.05)



SCHEMATIC

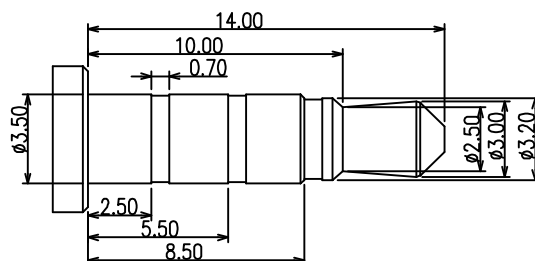

Ø3.50mm 4 POLE PLUG
DETAIL DRAWING(2D)