

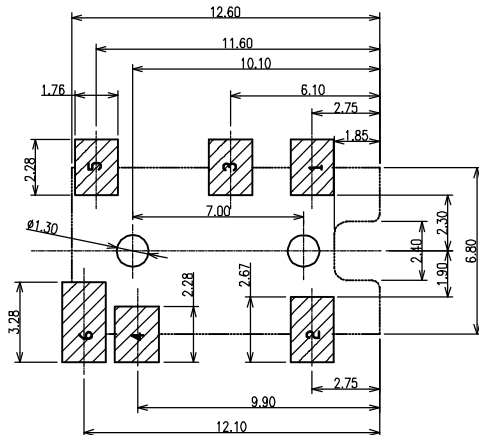


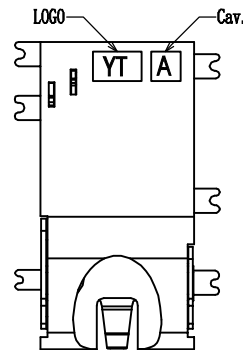

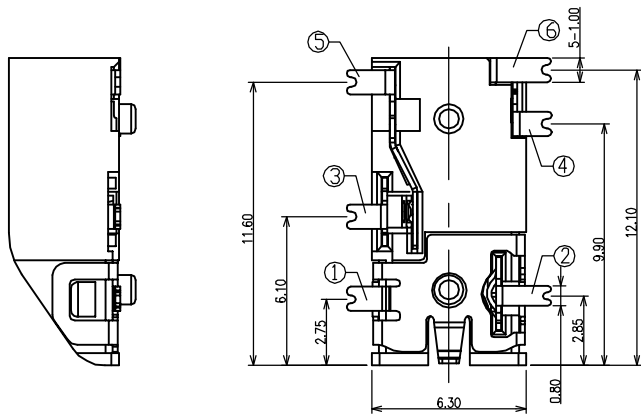


HSF



PCB HOLES(TOP VIEW) t=0.8mm
NOTE: GENERAL TOLERANCE: ±0.05mm

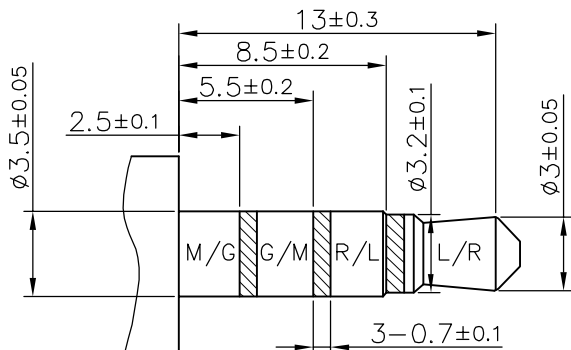

RECOMMENDED PLUG
ø3.5 4-POLE STANDARD PLUG

REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A1		Update drawing.	P.J		2021/4/30

PRODUCT NO.

PJ06-06 A B **-03

① ② ③ ④ ⑤ ⑥

PRODUCT SERIES:

① PJ06:PHONE JACK

② PIN NO.:

06:6PIN

③ MATERIAL:

A:Thermoplastics

④ COLOR:

B:BLACK

⑤ FINISHING:

05:Gold flash

05:Au 5u"

⑥ SERIES NO.:

03:

Specification:

1. Rating : DC 12V 1A.

2. Contact resistance: ≤50mΩ.

After life test:≤100mΩ.

3. Insulation resistance: ≥100MΩ (500VDC).

After life test:≥50MΩ.

4. Withstand voltage: 500VAC.

5. Insertion and extraction force:

Initial:3N~30N.

After life test:3N~30N.

6. life test: 5000cycles min.

7. Operation temperature range:-20℃~70℃.

8. Preservative temperature range:-40℃~85℃.

Model No.	PJ06-06***-03
Schematic	

NO.	DESCRIPTION	Q'TY	MATERIAL	REMARK
⑦	Housing	1	Thermoplastics	Black,HF
⑥	Shunt terminal B	1	Copper alloy t=0.20mm	Over All:Ni 30u"Min
⑤	Shunt terminal A	1	Copper alloy t=0.20mm	Contact Area:Gold flash
④	Left spring	1	Copper alloy t=0.20mm	Solder Area:Gold flash
③	Right spring	1	Copper alloy t=0.20mm	Over All:Ni 30u"Min
②	Mic spring	1	Copper alloy t=0.20mm	Contact Area see PRODUCT NO.
①	Ground spring	1	Copper alloy t=0.20mm	Solder Area:Gold flash


CUSTOMER DRAWING		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
GENERAL TOLERANCE X. .X ±0.20 .XX ±0.15 .XXX ±0.10	DRAWING	P. J		TITLE: PHONE JACK CONNECTOR 4.5h 6PIN大斜口型	
	APPROVED			P/N: XB-PJ06-06AB**-03	
ANGEL TOLERANCE X. .X ±3° .XX ±2° .XXX ±1°	DATE	2021. 04. 30		DRAWING NO. XB-C-PJ06-03	
		UNIT	mm	SCALE	1:1
		SIZE	A4	SHEET	1of2
		REV	A1		

HSF

☐ Packing Notes:



1. Reel : 1000pcs/ Reel.
2. Carton : 11000pcs/ 11 Reel/ Carton.

Pull Out Direction

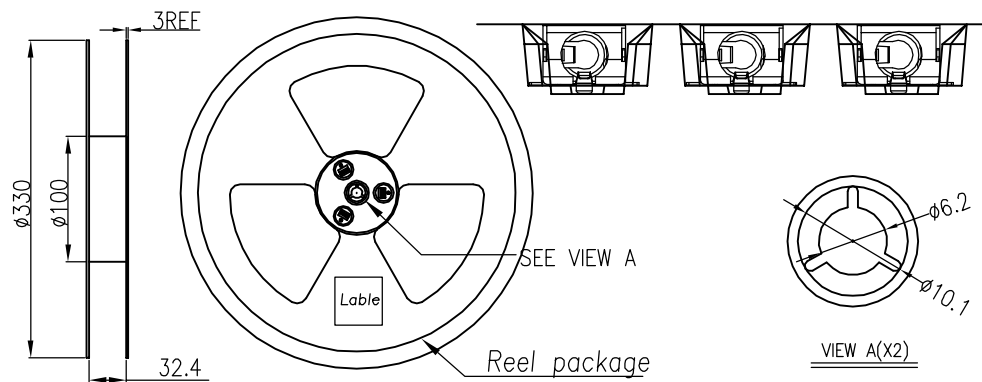


GATHER MATERIAL DIRECTION

INPUT MATERIAL DIRECTION

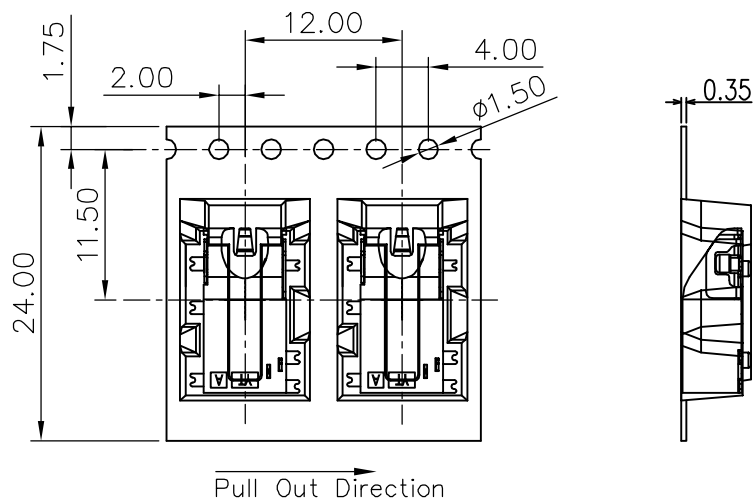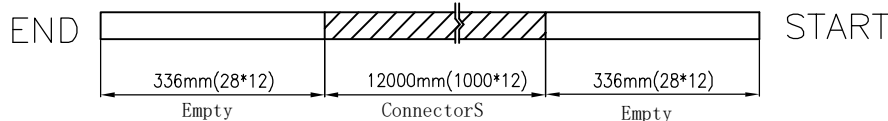


- 1) Seal the carton with tape;
- 2) Attach the label to the side of the carton.

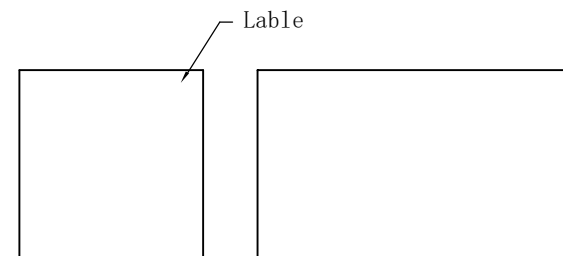

REMARK:

- 1).If there are empty zero boxes, they must be filled with buffer materials.
- 2). Handle with care during handling.
- 3). During transportation, do not stack too much and do not have heavy pressure.
- 4). The upper tape must be flat when sticking the lower tape, and there shall be no bubbles at the sticking place.

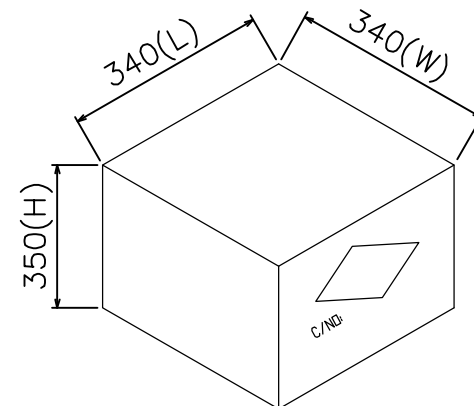

PACKING
DRAWING



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

GENERAL TOLERANCE
X. ±0.20
.XX ±0.15
.XXX ±0.10

DRAWING
APPROVED

P. J

TITLE:
PHONE JACK CONNECTOR 4.5h 6PIN大斜口型
P/N:
XB-PJ06-06AB**-03

ANGEL TOLERANCE
X. ±3°
.XX ±2°
.XXX ±1°

DATE
2021. 04. 30

DRAWING NO.
XB-C-PJ06-03



UNIT mm SCALE 1:1 SIZE A4 SHEET 2of2 REV A1