


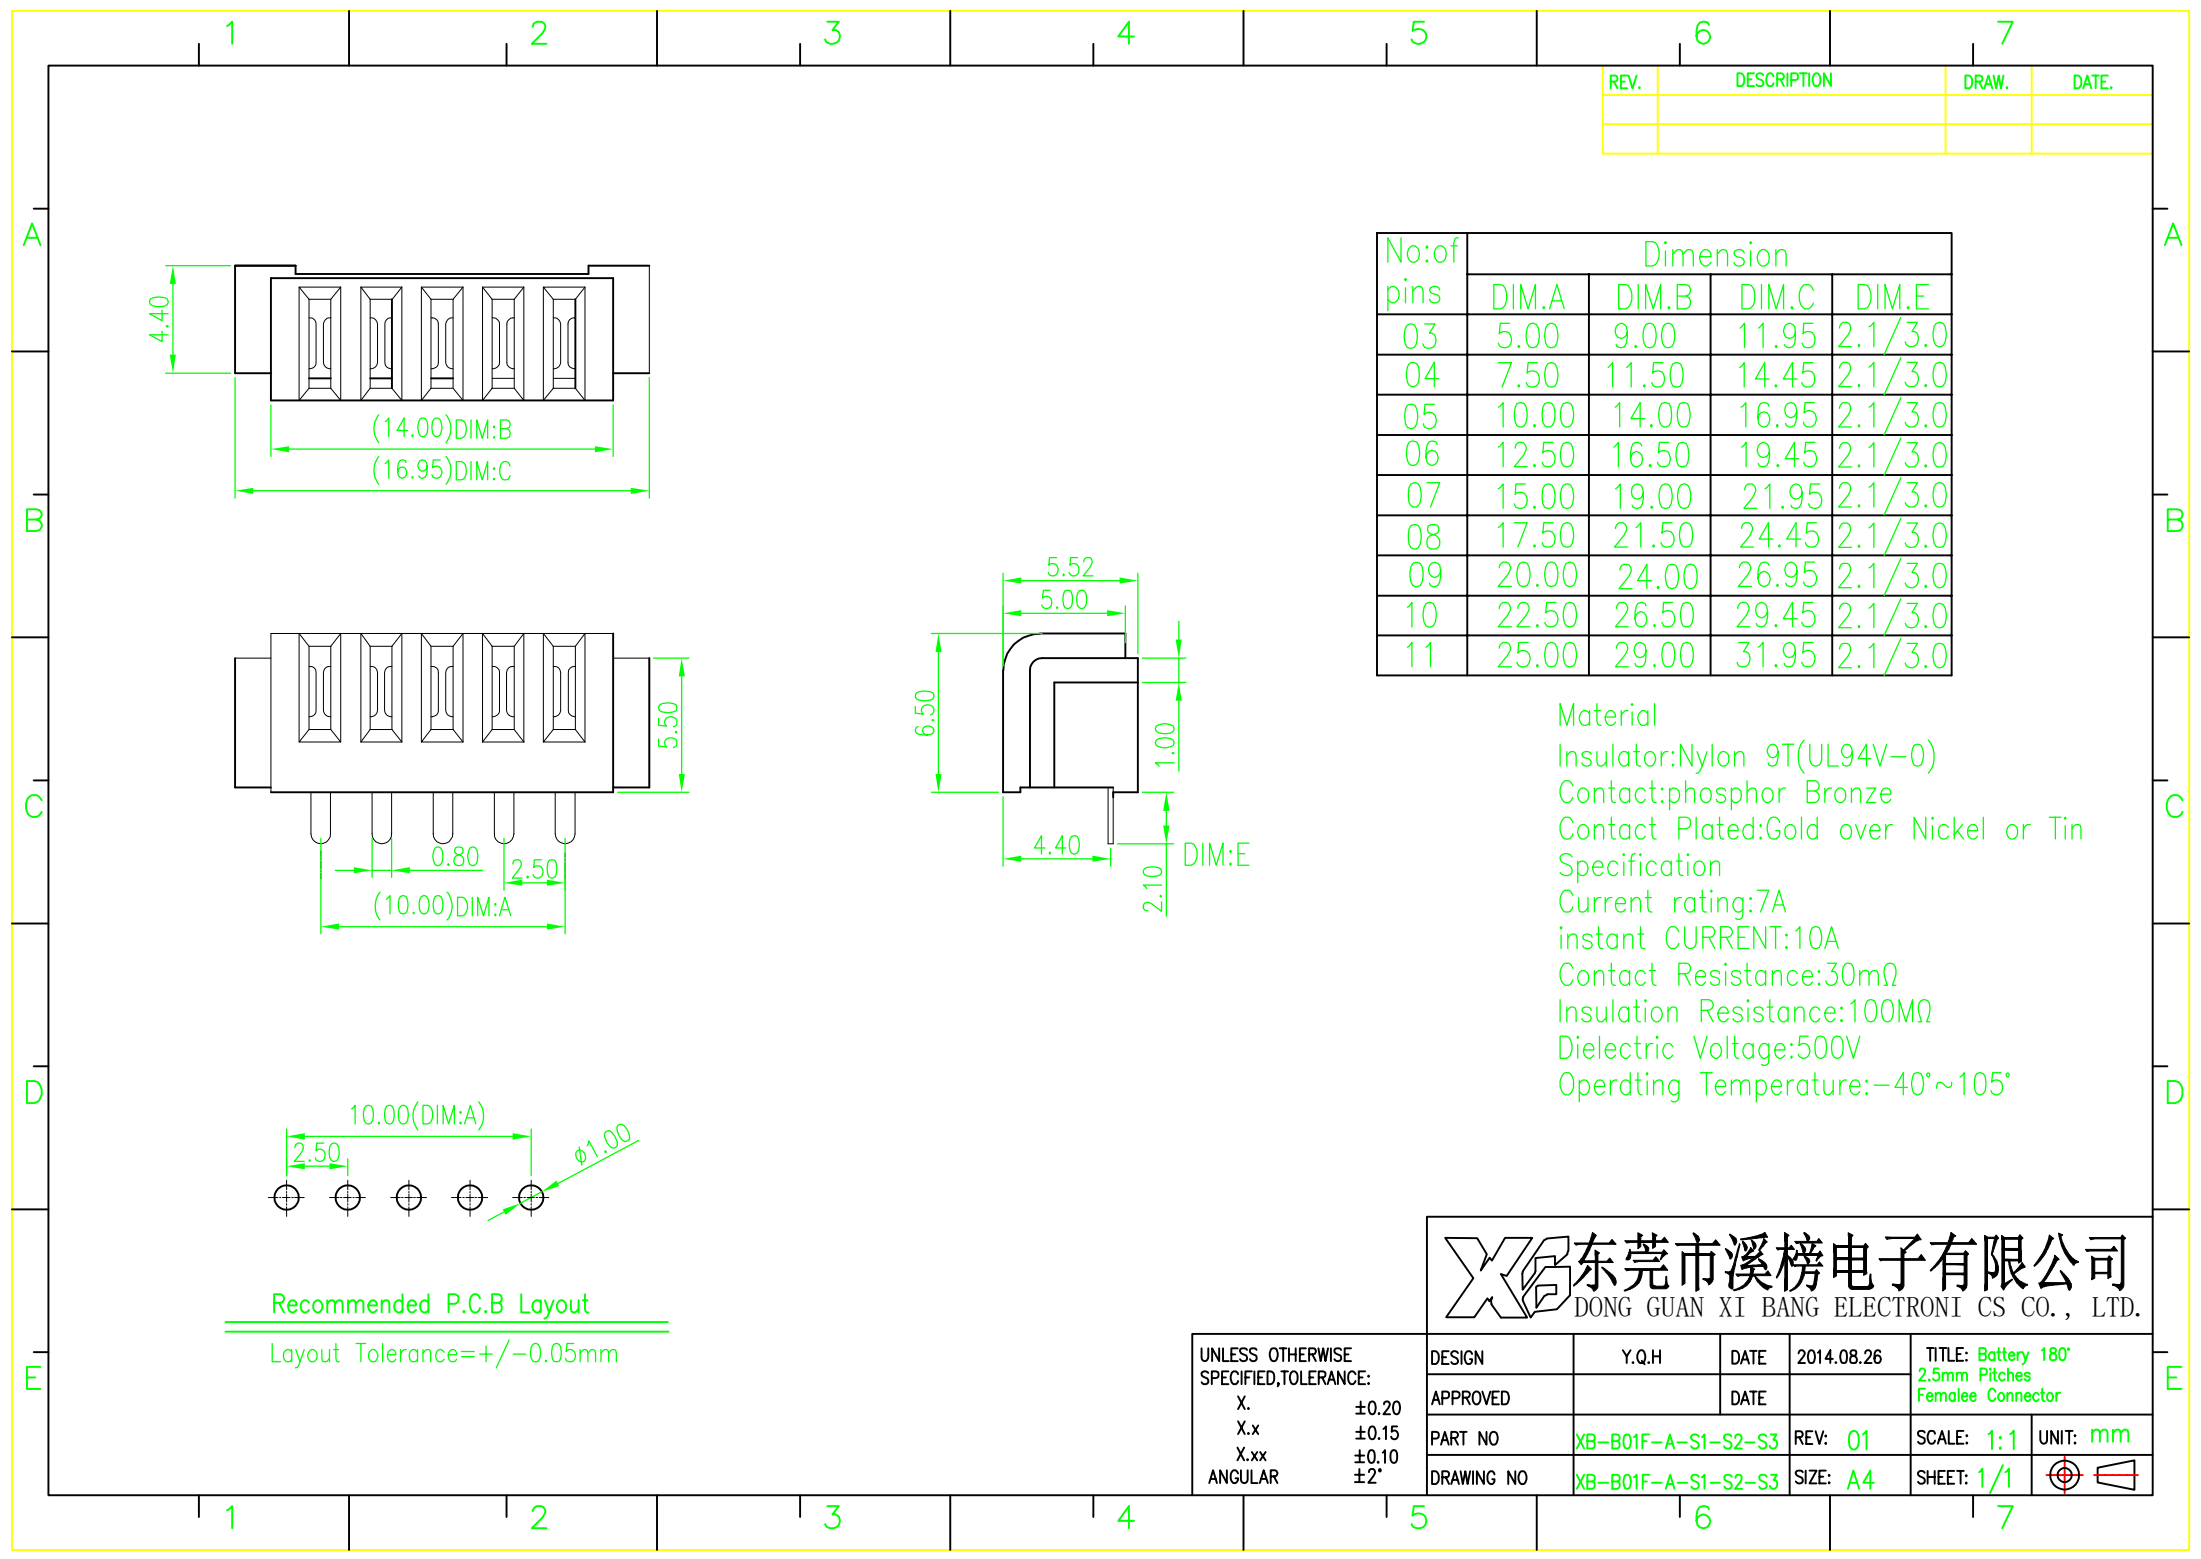


REV.	DESCRIPTION	DRAW.	DATE.

No:of pins	Dimension			
	DIM.A	DIM.B	DIM.C	DIM.E
03	5.00	9.00	11.95	2.1/3.0
04	7.50	11.50	14.45	2.1/3.0
05	10.00	14.00	16.95	2.1/3.0
06	12.50	16.50	19.45	2.1/3.0
07	15.00	19.00	21.95	2.1/3.0
08	17.50	21.50	24.45	2.1/3.0
09	20.00	24.00	26.95	2.1/3.0
10	22.50	26.50	29.45	2.1/3.0
11	25.00	29.00	31.95	2.1/3.0

Material
Insulator:Nylon 9T(UL94V-0)
Contact:phosphor Bronze
Contact Plated:Gold over Nickel or Tin
Specification
Current rating:7A
instant CURRENT:10A
Contact Resistance:30mΩ
Insulation Resistance:100MΩ
Dielectric Voltage:500V
Operdting Temperature:-40°~105°

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

UNLESS OTHERWISE SPECIFIED,TOLERANCE: X. ±0.20 X.x ±0.15 X.xx ±0.10 ANGULAR ±2°	DESIGN	Y.Q.H	DATE	2014.08.26	TITLE: Battery 180° 2.5mm Pitches Female Connector	
	APPROVED		DATE			
	PART NO	XB-B01F-A-S1-S2-S3		REV: 01	SCALE: 1:1	UNIT: mm
	DRAWING NO	XB-B01F-A-S1-S2-S3		SIZE: A4	SHEET: 1/1	

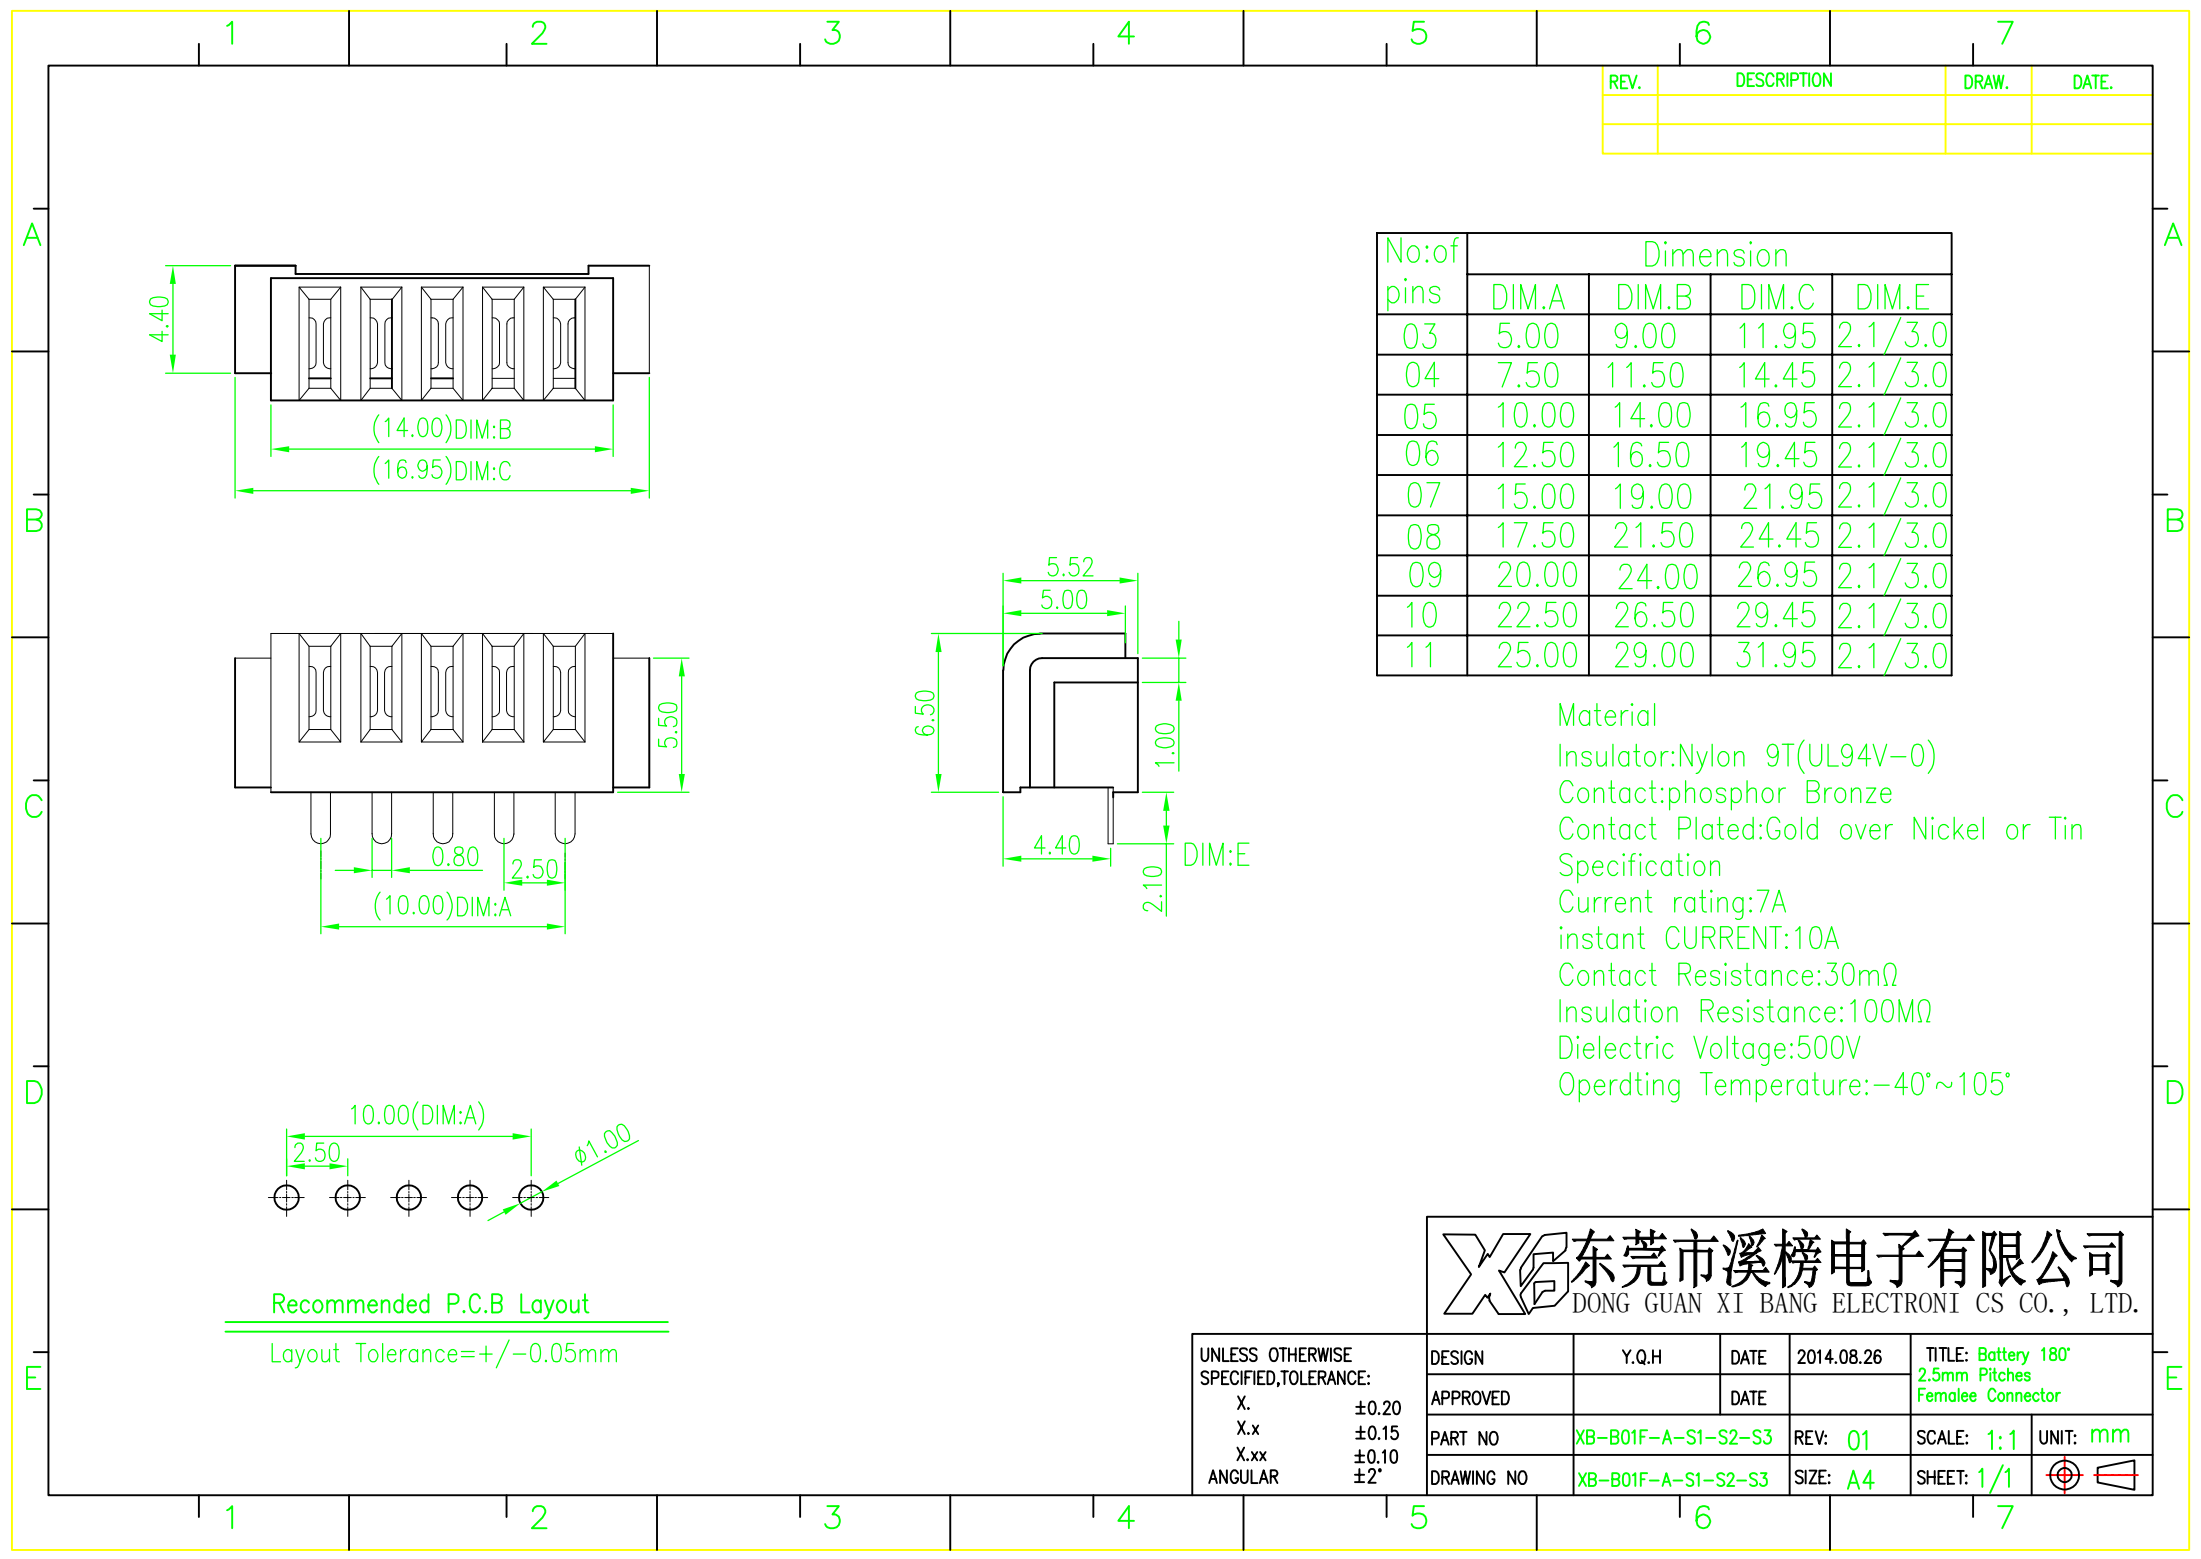

REV.	DESCRIPTION	DRAW.	DATE.

No:of pins	Dimension			
	DIM.A	DIM.B	DIM.C	DIM.E
03	5.00	9.00	11.95	2.1/3.0
04	7.50	11.50	14.45	2.1/3.0
05	10.00	14.00	16.95	2.1/3.0
06	12.50	16.50	19.45	2.1/3.0
07	15.00	19.00	21.95	2.1/3.0
08	17.50	21.50	24.45	2.1/3.0
09	20.00	24.00	26.95	2.1/3.0
10	22.50	26.50	29.45	2.1/3.0
11	25.00	29.00	31.95	2.1/3.0

Material
Insulator:Nylon 9T(UL94V-0)
Contact:phosphor Bronze
Contact Plated:Gold over Nickel or Tin
Specification
Current rating:7A
instant CURRENT:10A
Contact Resistance:30mΩ
Insulation Resistance:100MΩ
Dielectric Voltage:500V
Operdting Temperature:-40°~105°

东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONI CS CO., LTD.

UNLESS OTHERWISE SPECIFIED,TOLERANCE: X. ±0.20 X.x ±0.15 X.xx ±0.10 ANGULAR ±2°	DESIGN	Y.Q.H	DATE	2014.08.26	TITLE: Battery 180° 2.5mm Pitches Female Connector	
	APPROVED		DATE			
	PART NO	XB-B01F-A-S1-S2-S3		REV: 01	SCALE: 1:1	UNIT: mm
	DRAWING NO	XB-B01F-A-S1-S2-S3		SIZE: A4	SHEET: 1/1	