

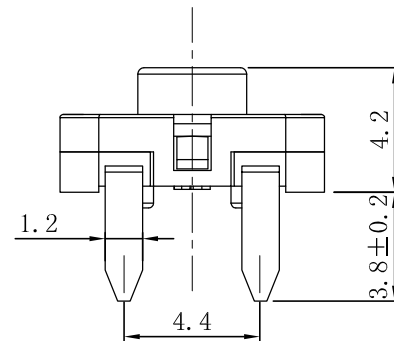
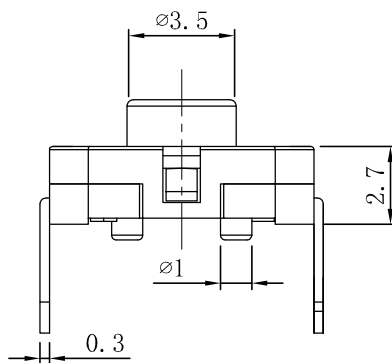
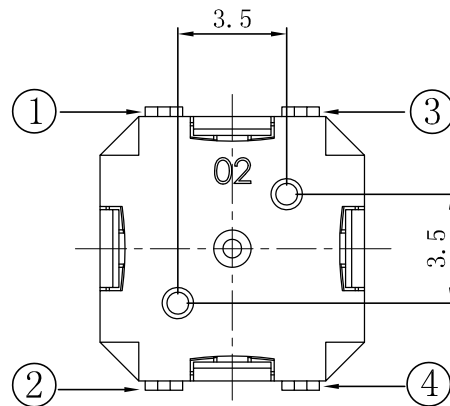




REV	DESCRIPTION	DRW	DATE
A/01		0101	2014.02.24

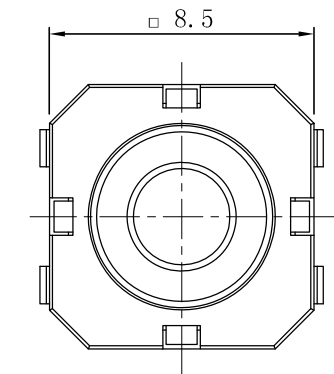

P. C. B LAYOUT

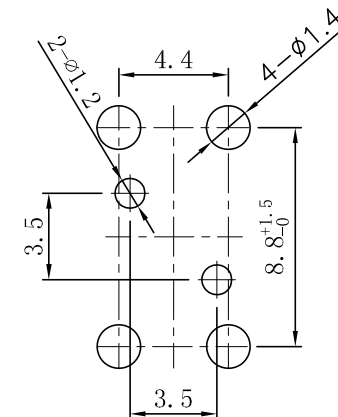


CIRCUIT



备注:

1. 额定电压: 12VDC 50mA
2. 接触阻抗: 100mΩ Max
3. 作 动 力: 4±1 N
4. 行 程: 0.8±0.3mm
5. 机械寿命: ≥100,000 CYCLES
6. 绝缘阻抗: 500MΩ 500VDC FOR 1MIN
7. 耐 电 压: 500VAC (50/60Hz) FOR 1MIN
8. 环保标准: 符合ROHS标准
9. 工作温度: -40℃~+90℃
10. 噪声控制: 依样品
11. 防尘: IP64
12. 波峰焊焊接温度: 260±5℃ 3S

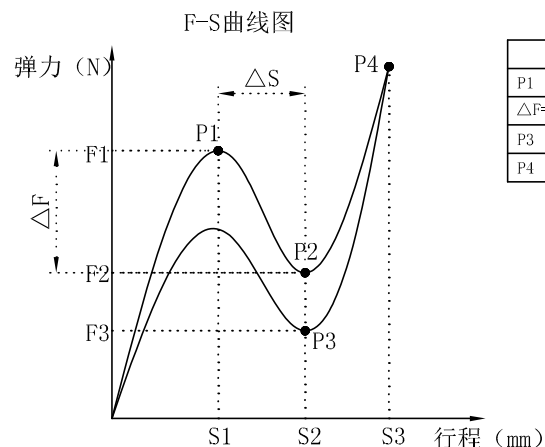

	弹力(N)	行程(mm)
P1	4±1	0.4±0.15
ΔF=P2=((F1-F2)/F1)*100	CC>50%	ΔS=0.2
P3	min. 1	
P4		0.8±0.3

5	端子	青铜镀银
4	弹片	不锈钢
3	按钮	硅胶
2	上盖	尼龙料
1	底座	尼龙料
序号	零件名称	材料

XGB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE				DRAWN	DATE	TITLE	TACT SWITCH	
UNLESS OTHERWISE STATED				0101	2014.02.24	MODEL	XB-TS-0851D	
X.X	±0.15	∠	±2"	CHK'D	DATE	MATL		
X.XX	±0.1	UNIT	mm					
REV	A/01	SCALE	4:1	APPV'D	DATE	FINISH		
SIZE	A4	SHEET	1 OF 1					

