



ABIDE BY ROHS



REV	DESCRIPTION	DRW	DATE
A/0	FIRST ISSUE	<i>DX.zhang</i>	2017-09-08

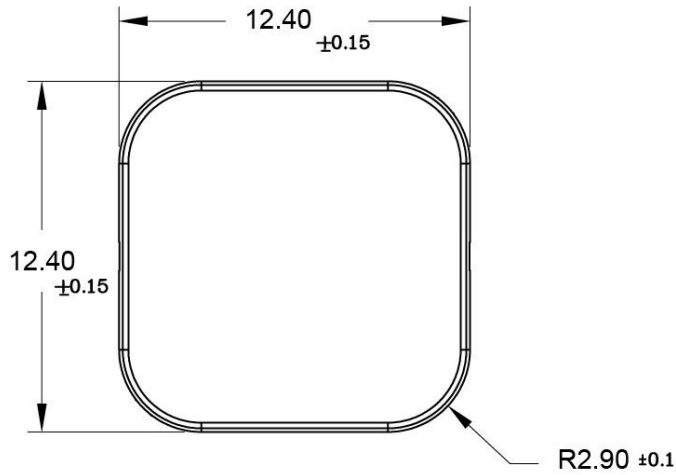

SPECIFICATIONS :
 RATING : 30mA / 28VDC
 OPERATING SPEED: 10mm/sec
 FORCE 1 : 5-7N
 FORCE 2 : 11-14N
 OPERATING POSITION 1 : 9.7 ± 0.3 mm
 OPERATING POSITION 2 : 8.4 ± 0.3 mm
 FULL TRAVELS : 2.5 ± 0.3 mm
 Electronics Life Test : 30,000 cycles.
 Mechanical Life Test : 150,000 cycles.

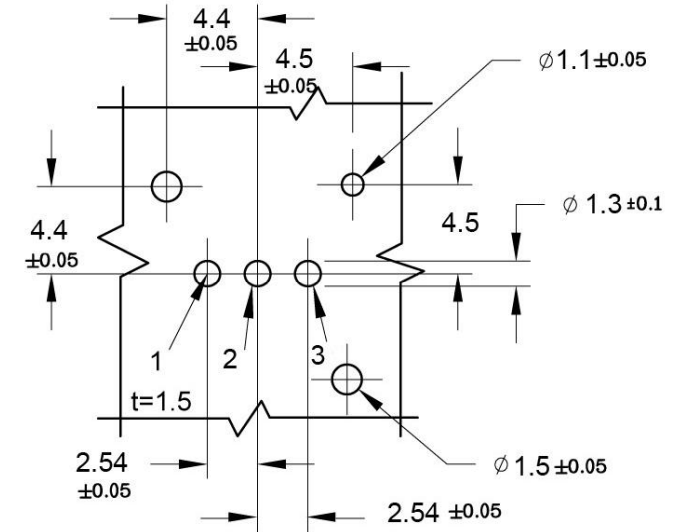

P.C.B LAYOUT

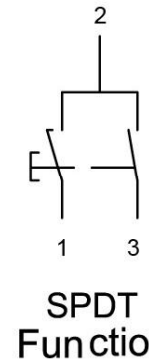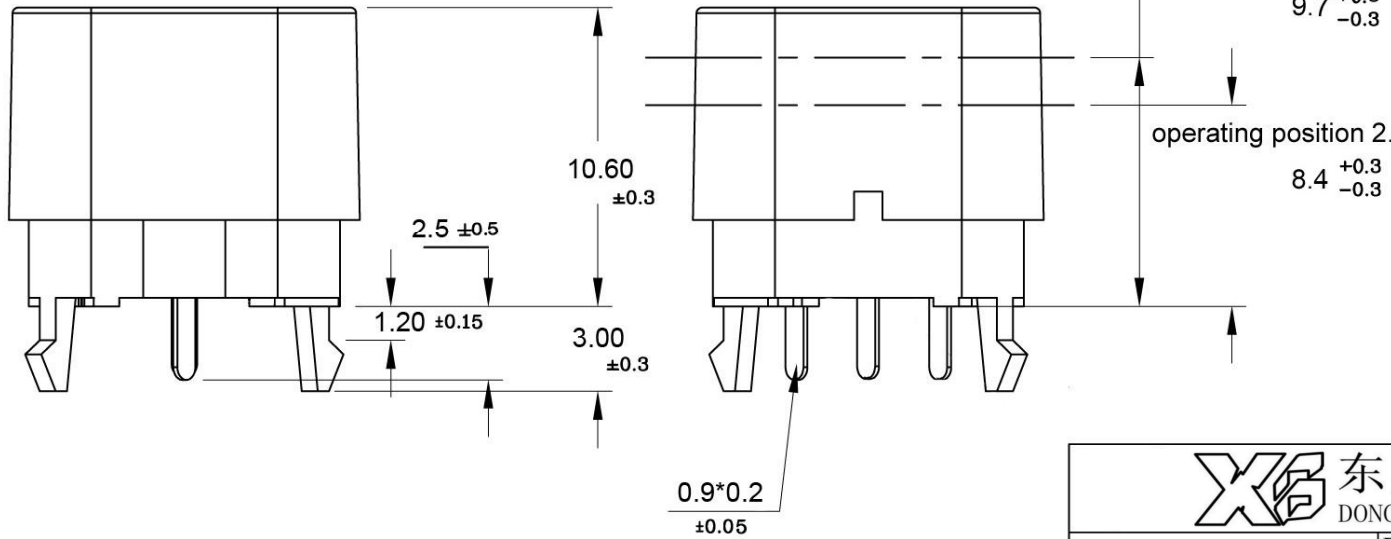

SPDT Function

东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.				TOLERANCE		DRAWN	DATE	TITLE	PUSH SWITCH
				UNLESS OTHERWISE STATED		<i>DX.zhang</i>	2017.09.08		
X.X	±0.30	\angle	±1°	CHK'D	DATE			MATL	
X.XX	±0.20	UNIT	mm	<i>XH.ou</i>	2017.09.08			FINISH	
REV.	A/0	SCALE	5 : 1	APPV'D	DATE				
SIZE	A4	SHEET	1 OF 1	<i>SY.yang</i>	2017.09.08				