


RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
X0		初版发行	2019.12.11	ZHOU	TEDDY	SUNNLY

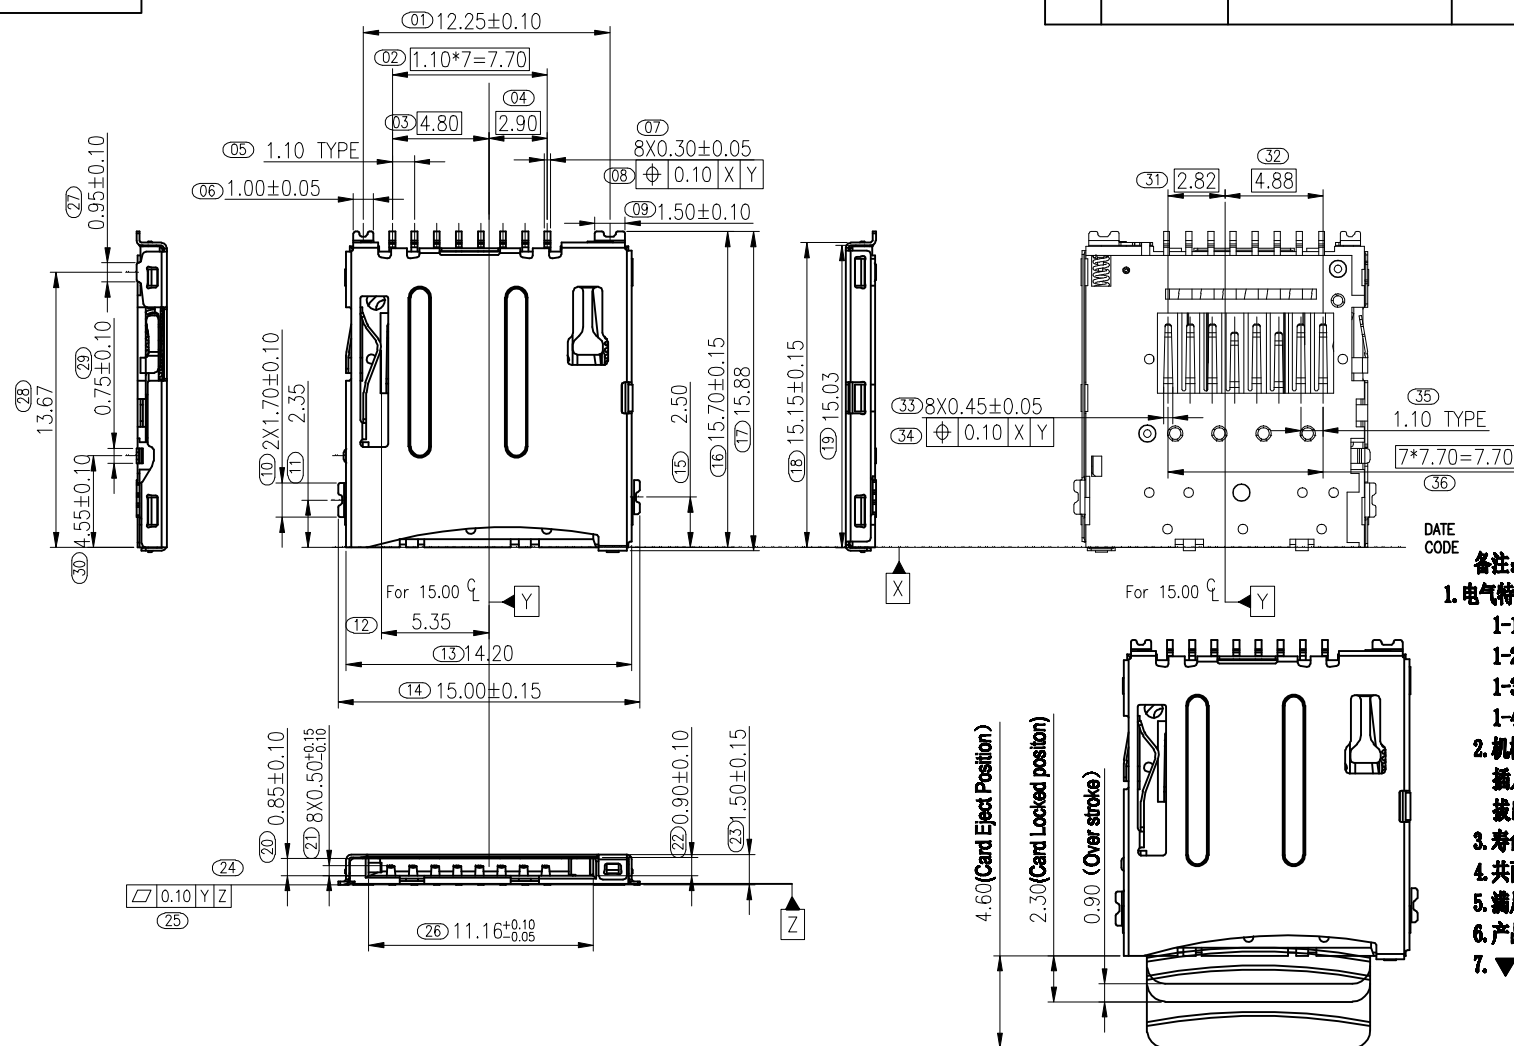

备注:

1. 电气特性:

- 1-1. 接触额定电流: 1A
- 1-2. 接触电阻: 100毫欧最大 (插拔前后)
- 1-3. 耐电压: 500V AC/1分钟.
- 1-4. 绝缘电阻: 1000兆欧最小, 测试后1000兆欧最小

2. 机械特性:




- 插入力: 初始 10N MAX ;
- 拔出力: 初始 10NMAX.
- 寿命插拔: 5000次
- 共面度0.10mm Max (IR后)
- 满足回流焊的无铅工艺
- 产品必需符合RoHS要求
- ▼符号为重点尺寸.

6	滑块	201040021	UL94V-0 颜色: 黑色	1PC
5	弹簧	304000073	焊锡30s min	1PC
4	挂钩	304000074	焊锡30s min	1PC
3	端子	202001090	C8210-BL, 接触区镀金2s min; 焊接区镀锡30s min, 全区镀底30~130s	1PC
2	铁壳	203000381	SUS301-L, 接触区镀金2s, 焊接区镀金6/7s, 全区镀底30s min	1PC
1	塑胶芯	205560081	LCP UL94V-0 颜色: 黑色	1PC
NO	品名	料号	规格	数量

MILLIMETERS	INCH	UNITS
X. ± 2'	X. ± 2'	MM
.X ± 0.30	.XX ± 0.012	MAT'L
.XX ± 0.20	.XXX ± 0.008	SEE NOTES
.XXX ± 0.10	.XXXX ± 0.004	FINISH
		SEE NOTES
		QTY
		SEE NOTES

XIB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
PART NUMBER: XB-102583332-D		TITLE: Micro SD Push Normal Type Connector (H=1.50mm)	
APPD:		DWG NO.: C-102583332-D-00	
CHKD:	SCALE	SHEET	REV.
DR:	1:1	1/3	X0

RoHS

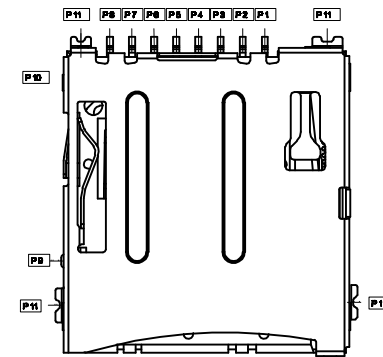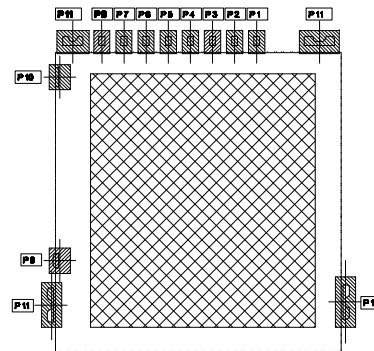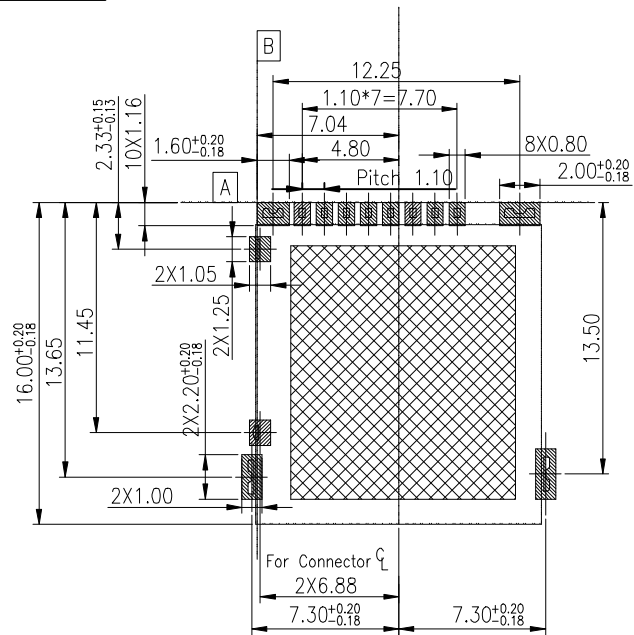

PCB PATTERN LAYOUT
(GENERAL TOLERANCE:±0.05)



OPENING/CLOSE OF SWITCH

	CARD DETECT SWITCH
CARD UNINSERTION	OPEN
CARD HALF INERTION	OPEN
CARD INSERTION	CLOSE
N/O	OPEN CLOSE


P6	Micro-SD_VSS		
P5	Micro-SD_CLK	P11	Cover_GND
P4	Micro-SD_VDD	P10	Micro-SD_GND
P3	Micro-SD_CMD	P9	Micro-SD_CD
P2	Micro-SD_CD/DATA3	P8	Micro-SD_DAT1
P1	Micro-SD_DATA2	P7	Micro-SD_DAT0
Pin Define			

MILLIMETERS	INCH	UNITS
X. ± 2'	X. ± 2'	MM
.X ± 0.30	.XX ± 0.012	
.XX ± 0.20	.XXX ± 0.008	
.XXX ± 0.10	.XXXX ± 0.004	
		SEE NOTES
		FINISH
		SEE NOTES
		QTY
		SEE NOTES


东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
PART NUMBER: XB-102583332-D	TITLE: Micro SD Push Normal Type Connector (H=1.50mm)
APPD:	DWG NO.: C-102583332-D-00
CHKD:	SCALE 1:1
DR:	SHEET 2/3
	REV. X0

RoHS

客户拉出方向

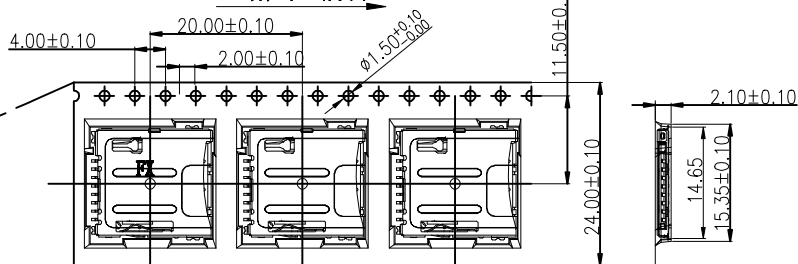


客户拉出方向

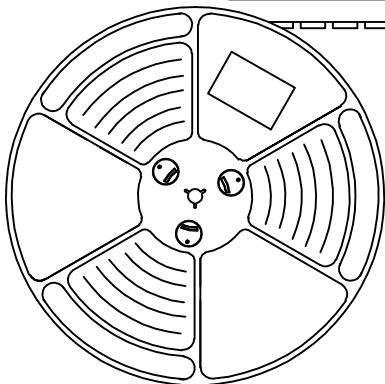

330

NOTES

- 每卷包装数量:1500PCS/每卷
- 卷带包装方式:

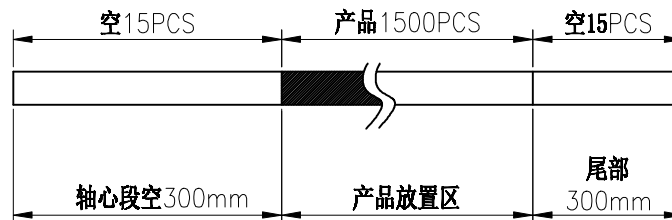

3.每箱包装数量:15000PCS/箱



纸箱底部和顶部各垫一块保利龙

护角

纸箱

封箱胶带

10卷/箱

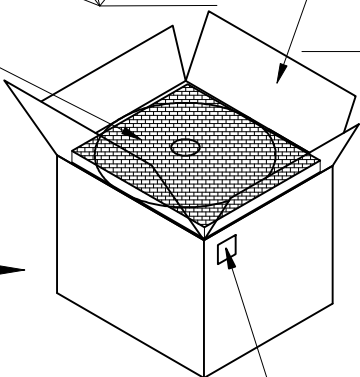

外箱标签贴位置

303060001	PE袋, T=0.06mm, 730*760mm, 开口处730mm	1PC
303020124	载带, 材质PS, 透明, T=0.30, 宽24, PITCH 20	30.60M*10
303110001	护角, K=K, T=7.0mm, 95*95*290mm	4PC
303130001	珍珠棉340mm*340mm*18mm	2PC
303070025	自粘带, 宽21.5MM 用于宽24MM卷带, 200M/R	30.60M*10
303180020	卷盘, 蓝色, 13英寸*24CM(直径330)	10PC
303040062	纸箱, K=K, T=7.0mm, 350*350*340mm	1PC
料号	品名规格	数量

MILLIMETERS	INCH	UNITS	东莞市溪榜电子有限公司			
		MM	DONG GUAN XI BANG ELECTRONICS CO., LTD.			
X. ± 2'	X. ± 2'	MAT'L	PART NUMBER:		TITLE:	
.X ± 0.20	.XX ± 0.008	SEE NOTES	XB-102583332-D		Micro SD Push Normal Type Connector (H=1.60mm)	
.XX ± 0.10	.XXX ± 0.004	FINISH	APPD:		DWG NO.:	
.XXX ± 0.05	.XXXX ± 0.002	SEE NOTES	CHKD:		C-102583332-D-00	
		QTY	DR:			
		SEE NOTES			SCALE	SHEET
					1:1	3/3
						REV.
						X0