


15

SPECIFICATION:


USB SERIES
PLATING: —
31:G/F+G/F

— PAKING:
2: REEL
— SERIAL NO.

1. CURRENT RATING: 3.0A MAX
2. WITHSTANDING VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
9. SOLDER ABILITY: 260±5°C, 5±0.5S.

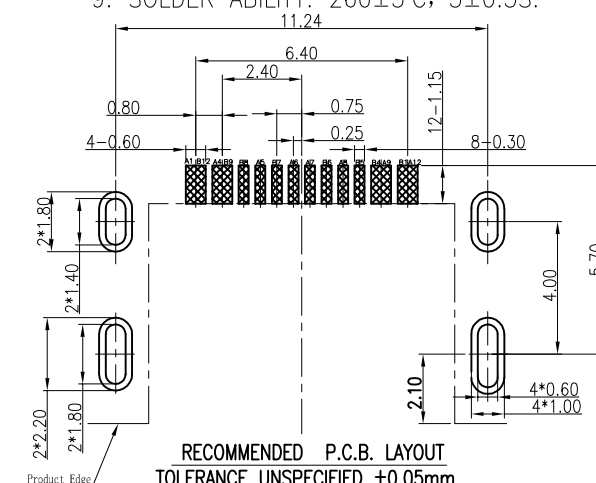

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

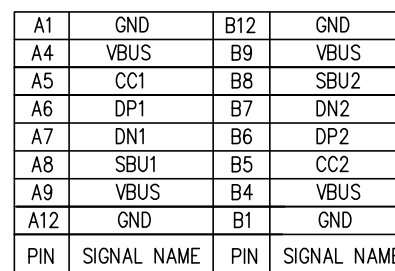


5	SHELL	SUS304	50u" Ni Plated	1PCS
4	SHIELDING PLATE	SUS301	NO PLATING	1PCS
3	MD	LCP UL 94V-0	BLACK	1PCS
2	CONTACT	C2680	30u" Ni UNDERPLATED OVERALL G/F PLATED ON CONTACT AREA G/F PLATED ON SOLDER AREA	2SET
1	HOUSING	LCP UL94V-0	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

MILLIMETERS		INCH		UNITS MM		 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD					
X° ± 2°		X° ± 2°		MAT'L							
.X ±0.30		.XX ±0.012		SEE NOTES		PART NUMBER:		TITLE:			
.XX ±0.20		.XXX ±0.008		FINISH		XB-104312162-B		TYPE C 16PIN沉板0.8(五个点焊)			
.XXX±0.10		.XXXX±0.004		SEE NOTES		APPD: MOON		DWG NO.:			
				QTY		CHKD: --		C-104312162-B-00			
				SEE NOTES		DR: FY			SCALE	SHEET	REV.
								1:1	1/2	AO	

RoHS

User Direction of Unreeling

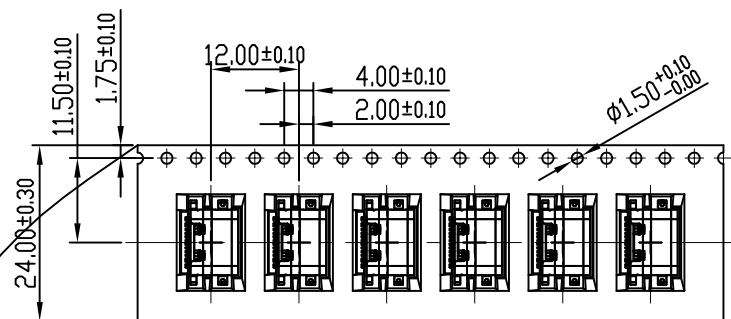


COVER TAPE PEELING ANGLE:165°~180°

PEELING FORCE:20~130g

CARRIER TAPE


User Direction of Unreeling

DETAIL B

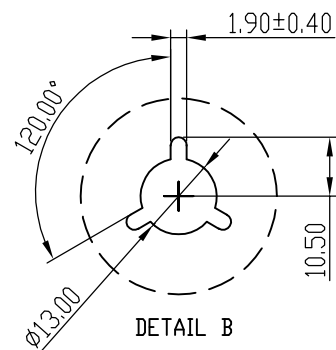


NOTES

1. NUMBER OF CONNECTORS:1500PCS/REEL
2. LEAD TAPE LENGTH

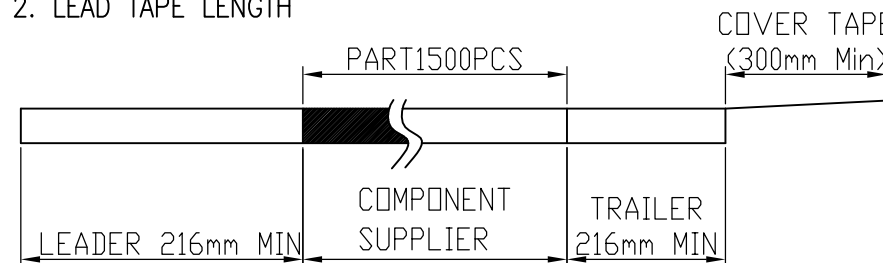

3. QUANTITY: 15000PCS/CARTON

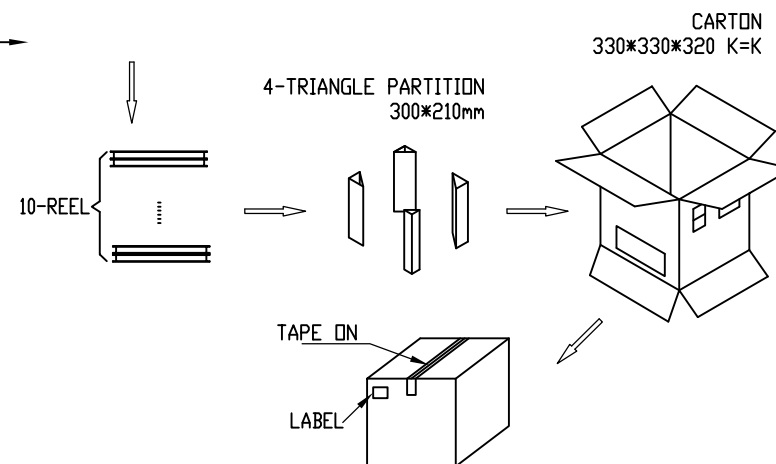

MILLIMETERS	INCH	UNITS	MM	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
X° ± 2°	X° ± 2°	MAT'L		PART NUMBER: XB-104312162-B			
.X ± 0.30	.XX ± 0.012	SEE NOTES		TITLE: TYPE C 16PIN沉板0.8(五个点焊)			
.XX ± 0.20	.XXX ± 0.008	FINISH		APPD: MOON			
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES		DWG NO.: C-104312162-B-00			
			QTY	CHKD: --			
			SEE NOTES	DR: FY			
					SCALE	SHEET	REV.
					1:1	2/2	A0