


15


SPECIFICATION:

— PAKING:
2: REEL
— SERIAL NO.

1. CURRENT RATING: 5.0A MAX
2. WITHSTANDING VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
9. SOLDER ABILITY: 255±5°C, 5±0.5S.

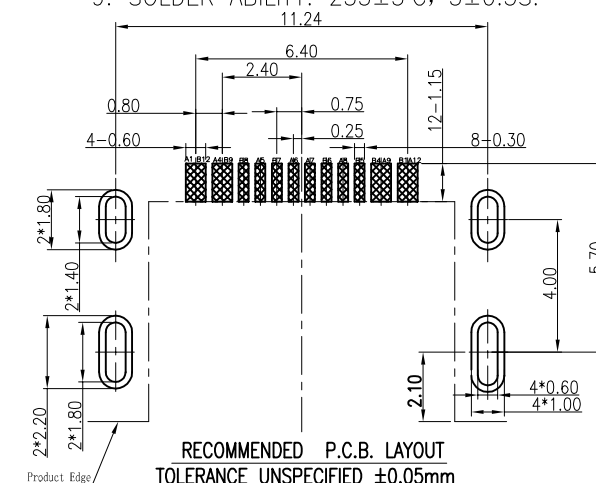

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

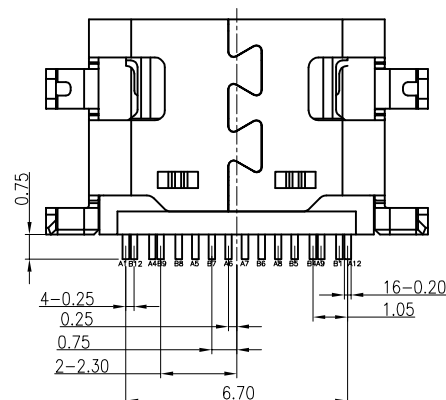


5	SHELL	SUS304	50u" Ni Plated	1PCS
4	SHIELDING PLATE	SUS301	NO PLATING	1PCS
3	MD	LCP UL 94V-0	BLACK	1PCS
2	CONTACT	C2680	30u" Ni UNDERPLATED OVERALL G/F PALTED ON CONTACT AREA G/F PLATED ON SOLDER AREA	2SET
1	HOUSING	LCP UL94V-0	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

MILLIMETERS		INCH	UNITS MM	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.				
X° ± 2°	X° ± 2°		MAT'L	PART NUMBER: XB-104312162		TITLE: TYPE C 16PIN沉板.08		
.X ± 0.38	.XX ± 0.012		SEE NOTES					
.XX ± 0.25	.XXX ± 0.008		FINISH	APPD: HUANGTAO		DWG NO.: C-104312162-00		
.XXX ± 0.15	.XXXX ± 0.004		SEE NOTES					
			QTY	CHKD: --				
			SEE NOTES	DR: FY				
						SCALE 1:1	SHEET 1/2	REV. A0

	5
--	---

RoHS

User Direction of Unreeling

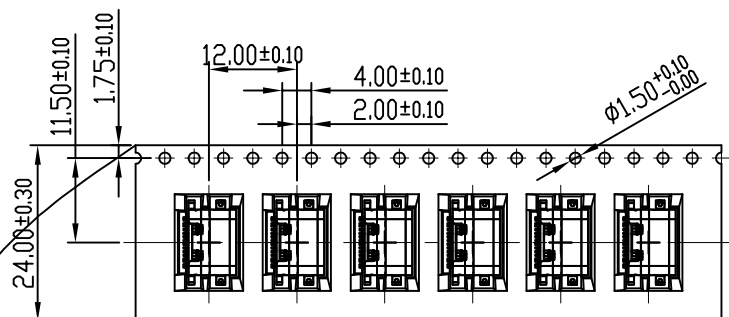


COVER TAPE PEELING ANGLE: $165^\circ \sim 180^\circ$

PEELING FORCE: $20 \sim 130g$

CARRIER TAPE

User Direction of Unreeling


DETAIL B

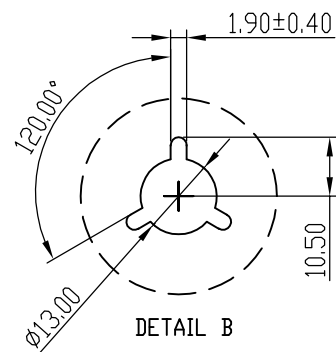


NOTES

1. NUMBER OF CONNECTORS: 1500PCS/REEL

2. LEAD TAPE LENGTH

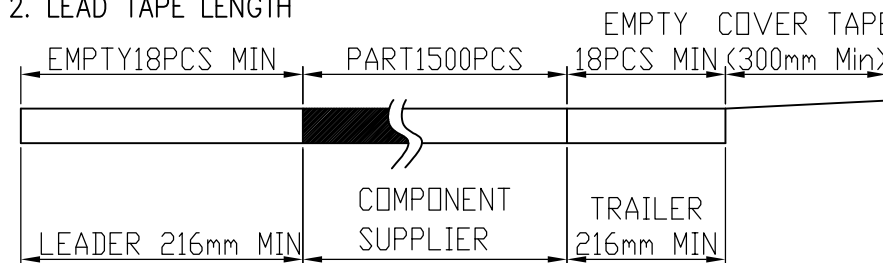

3. QUANTITY 15000PCS/CARTON

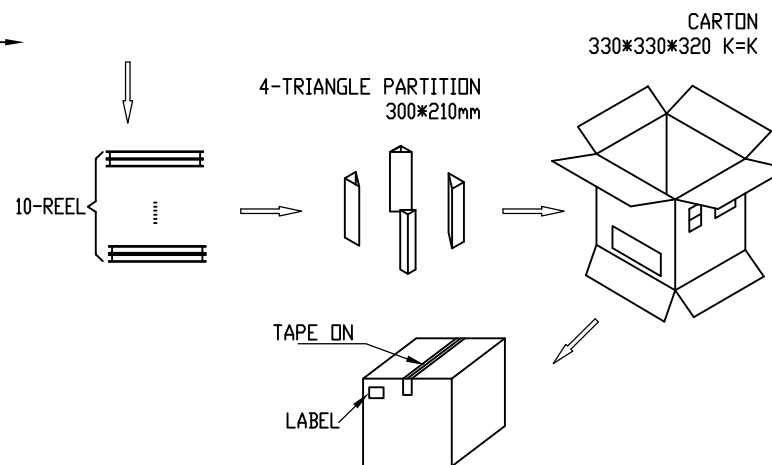

MILLIMETERS	INCH	UNITS	MM	东莞市溪榜电子有限公司			
X° ± 2°	X° ± 2°	MAT'L		DONG GUAN XI BANG ELECTRONICS CO., LTD.			
.X ± 0.30	.XX ± 0.012	SEE NOTES		PART NUMBER:		TITLE:	
.XX ± 0.20	.XXX ± 0.008	FINISH		XB-104312162		TYPE C 16PIN 沉板 0.8	
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES		APPD: HUANGTAO		DWG NO.:	
		QTY		CHKD: --		C-104312162-00	
		SEE NOTES		DR: FY			
						SCALE	SHEET
						1:1	2/2
						REV.	A0