

15

F

RoHS

User Direction of Unreeling →

Dimensions:
16.00±0.10
4.00±0.10
2.00±0.10
7.50±0.30
1.75±0.10
 $\phi 1.50^{+0.10}_{-0.00}$

COVER TAPE PEELING ANGLE: 165°~180°
PEELING FORCE: 20~130g

CARRIER TAPE

User Direction of Unreeling →

DETAIL B

DETAIL B

10-REEL

4-TRIANGLE PARTITION

TAPE ON

LABEL

CARTON

NOTES

- NUMBER OF CONNECTORS: 1000PCS/REEL
- LEAD TAPE LENGTH
- QUANTITY 10000PCS/CARTON

EMPTY 15PCS MIN

PART 1000PCS

EMPTY 15PCS MIN

COVER TAPE (300mm Min)

LEADER 240mm MIN

COMPONENT SUPPLIER

TRAILER 240mm MIN

MILLIMETERS INCH UNITS MM

MILLIMETERS	INCH	UNITS	MM
X.* ± 2*	X.* ± 2*	MAT'L	
.X ± 0.30	.XX ± 0.012	SEE NOTES	
.XX ± 0.20	.XXX ± 0.008	FINISH	
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES	
		QTY	
		SEE NOTES	

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

PART NUMBER: XB-104312272

TITLE: TYPE C 16PIN板上全贴

APPD:

CHKD:

DR:


DWG NO.: C-104312722-00

SCALE: 1:1


SHEET: 2/2


REV: A0

1. NUMBER OF CONNECTORS:1000PCS/REEL
2. LEAD TAPE LENGTH

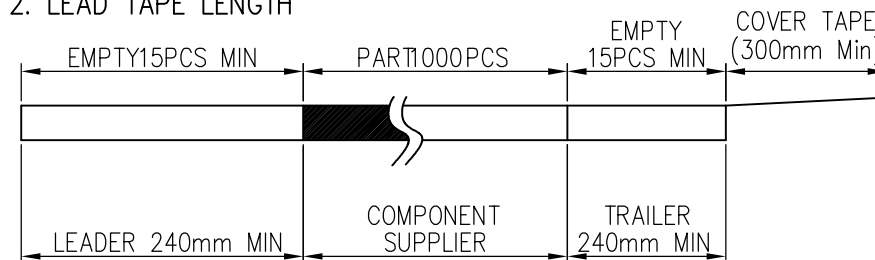

3.QUANTITY:10000PCS/CARTON

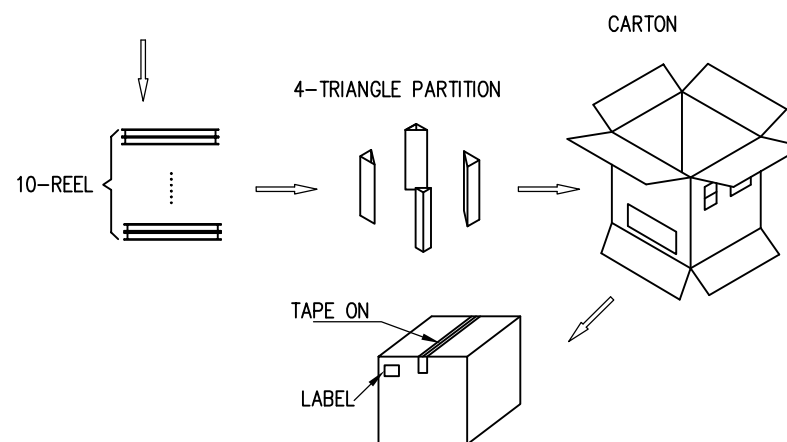

MILLIMETERS	INCH	UNITS MM	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
X° ± 2°	X° ± 2°	MAT'L	PART NUMBER: XB-104312272		TITLE: TYPE C 16PIN板上全贴	
.X ± 0.30	.XX ± 0.012	SEE NOTES				
.XX ± 0.20	.XXX ± 0.008	FINISH	APPD:		DWG NO.: C-104312722-00	
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES				
		QTY	CHKD:			
		SEE NOTES				