
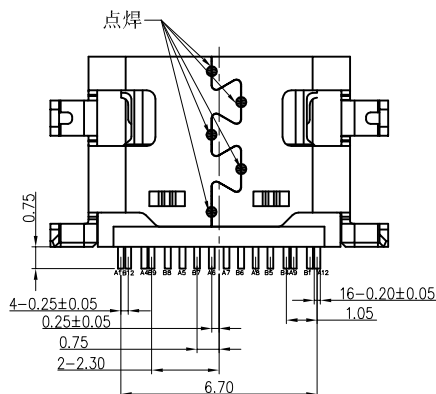
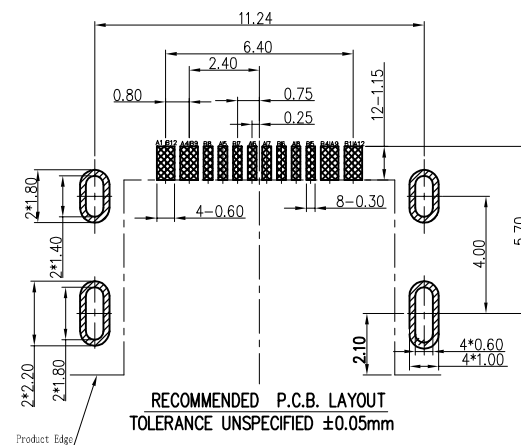
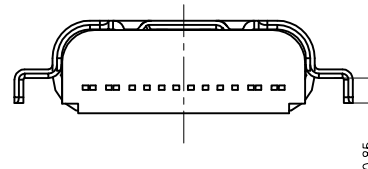
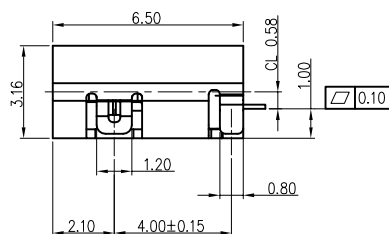


15

- PAKING:
2: REEL
- SERIAL NO.

1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

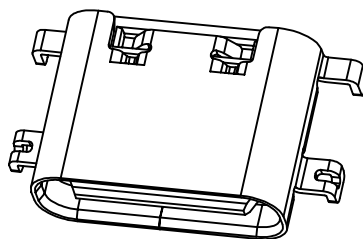


5	SHELL	SUS304	NI Plated	1PCS
4	SHIELDING PLATE	SUS304	---	1PCS
3	CONTACT	C5191	Au/NI Plated	1SET
2	CONTACT	C5191	Au/NI Plated	1SET
1	HOUSING	 PA10T	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

5

RoHS

User Direction of Unreeling

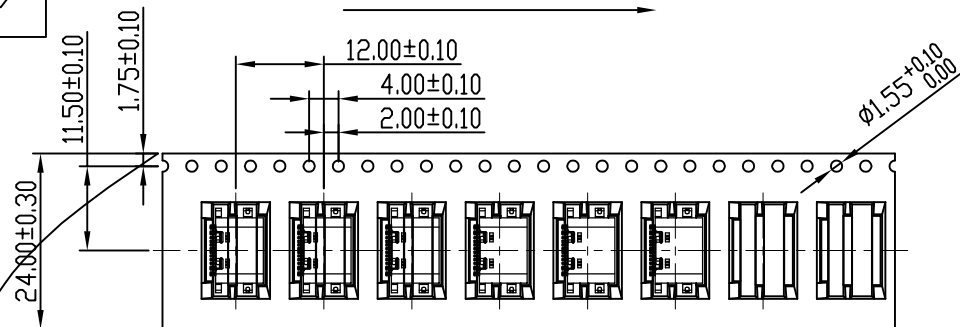


COVER TAPE PEELING ANGLE: $165^\circ \sim 180^\circ$

PEELING FORCE: $20 \sim 130g$

CARRIER TAPE

User Direction of Unreeling


DETAIL B

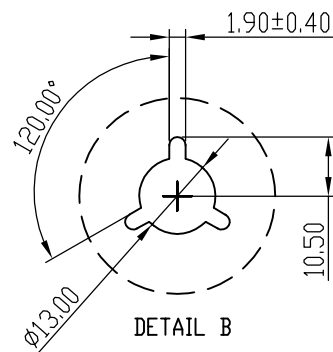


NOTES


1. NUMBER OF CONNECTORS: 1500PCS/REEL

2. LEAD TAPE LENGTH

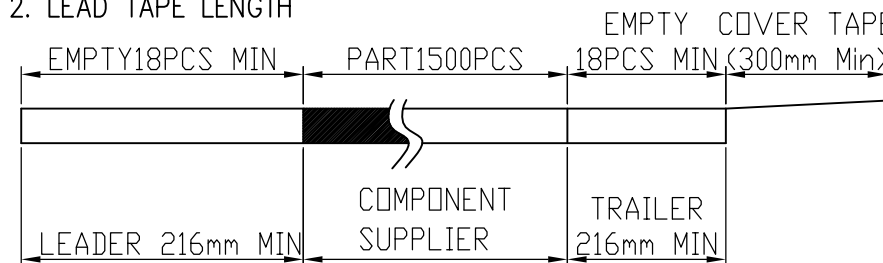

3. QUANTITY: 15000PCS/CARTON

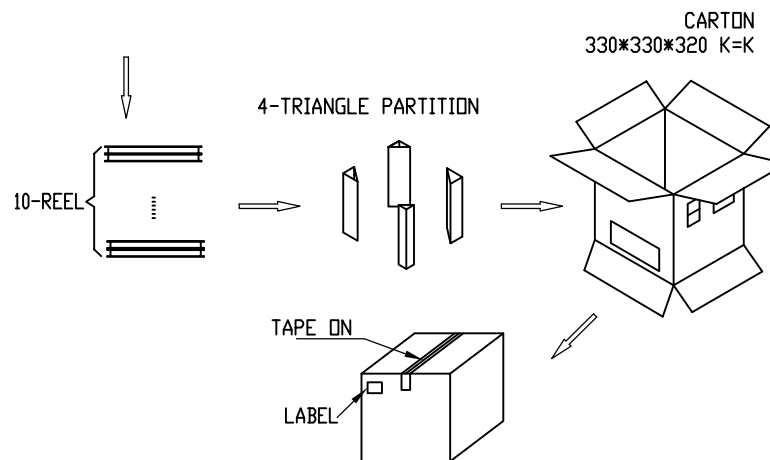

MILLIMETERS	INCH	UNITS MM	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
X° ± 2°	X° ± 2°	MAT'L				
.X ±0.30	.XX ±0.012	SEE NOTES				
.XX ±0.20	.XXX ±0.008	FINISH				
.XXX±0.10	.XXXX±0.004	SEE NOTES				
			PART NUMBER: XB-104313932	TITLE: TYPE C 16PIN沉板1.0(五个焊点)		
			APPD:	DWG NO: C-104313932-00		
			CHKD:			
			DR:			
			QTY SEE NOTES	SCALE 1:1	SHEET 2/2	REV. A0