
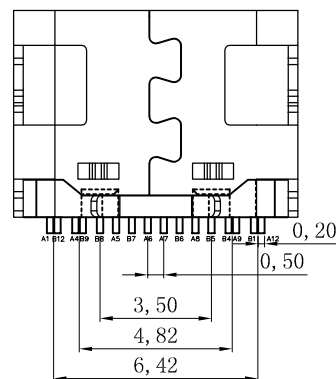
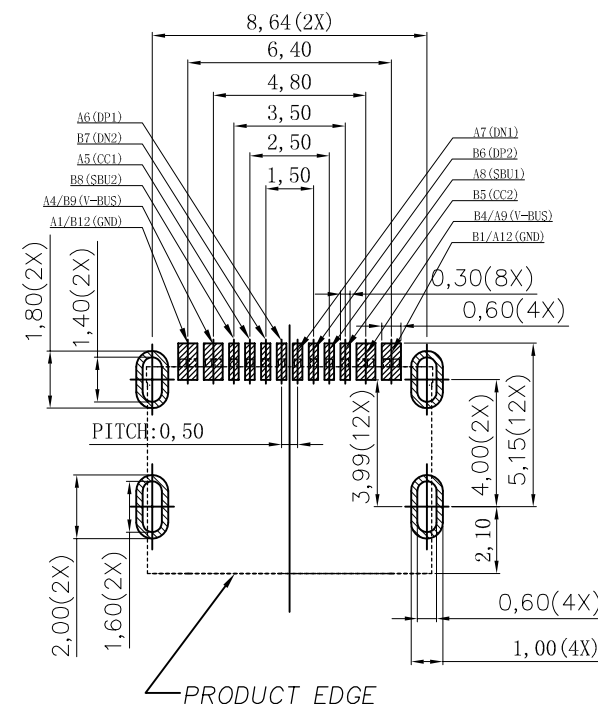

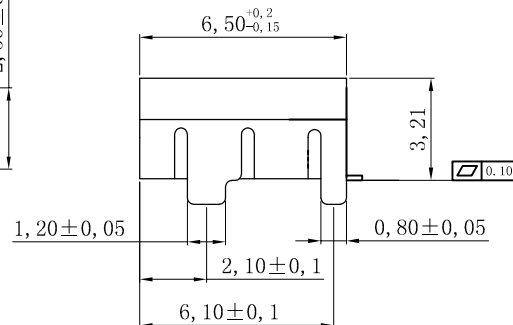
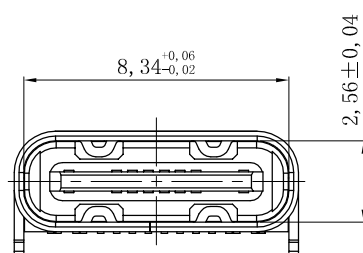


RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	09/25'20	CQ	/	MOON

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME



1. 材料

A. 主体: LCP, 黑色, UL 94-V0;

B. 端子: 铜合金, 电镀刷金;

C. 外壳: 不锈钢, 镀镍;

2. 主要特性

A. 额定电压: 5V ;

B. 额定电流: 3A ;

C. 工作温度: -40°C~85°C ;

3. 电气要求:

A. 接触电阻: 40mΩ Max. (初始), 50mΩ Max. (最后);

B. 电压: 100V AC 1分钟;

C. 绝缘电阻: 100MΩ min. DC 500V;


4. 机械性能:

A. 插入力: 5~20N. (从1~10,000次);

B. 拔出力: 8~20N. (从1~1,000次);

6~20N. (从1,001~10,000次);

C. 耐久性寿命: 10,000次;

MILLIMETERS	INCH	UNITS MM	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.				
X° ± 2°	X° ± 2°	MAT'L					
.X ± 0.30	.XX ± 0.012	SEE NOTES					
.XX ± 0.20	.XXX ± 0.008	FINISH					
.XXX± 0.10	.XXXX± 0.004	SEE NOTES					
			PART NUMBER: XB-104317062	TITLE: TYPE C 16PIN板上 6.5L无柱			
			APPD:	DWG NO.: C-104312922-00			
			CHKD:				
			DR:				
			SCALE	SHEET	REV.		
			1:1	1/2	A0		

E

MILLIMETERS	INCH	UNITS MM	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD										
X° ± 2°	X° ± 2°	MAT'L	PART NUMBER: XB-104317062		TITLE: TYPE C 16PIN板上 6.5L无柱								
.X ±0.30	.XX ±0.012	SEE NOTES											
.XX ±0.20	.XXX ±0.008	FINISH	APPD:		DWG NO: C-104312922-00								
.XXX ±0.10	.XXXX ±0.004	SEE NOTES	CHKD:										
		QTY	DR:		 <table><tr><th>SCALE</th><th>SHEET</th><th>REV.</th></tr><tr><td>1:1</td><td>2/2</td><td>A0</td></tr></table>			SCALE	SHEET	REV.	1:1	2/2	A0
		SCALE	SHEET	REV.									
1:1	2/2	A0											
		SEE NOTES											