

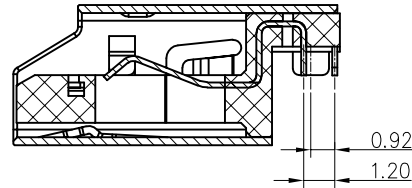
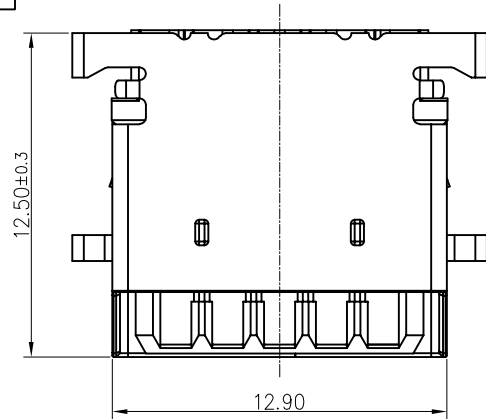
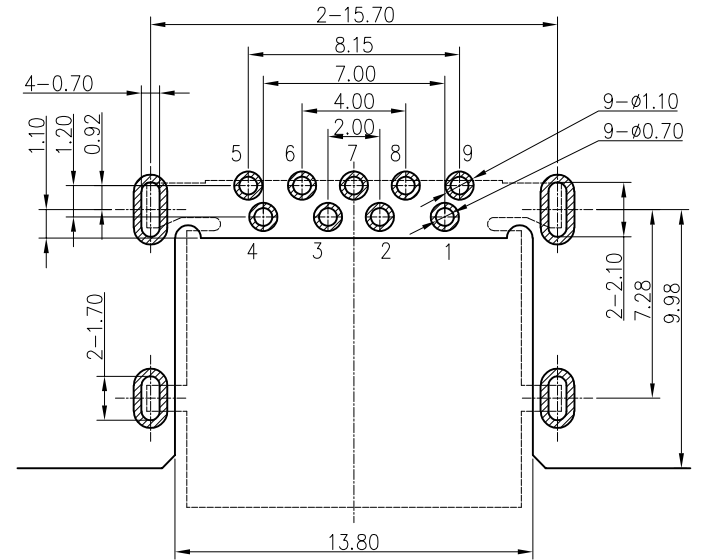


ROHS


REV.	ECN. #	DESCRIPTION	NAME	DATE
A0	—	NEW RELEASE	X. F. Wang	2022. 09. 01

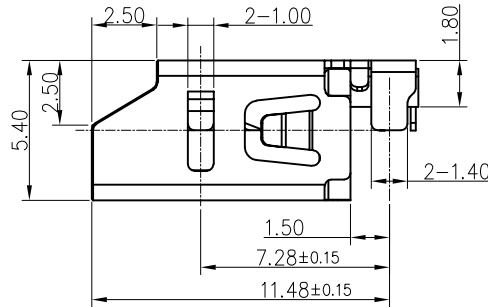

SECTION: A-A

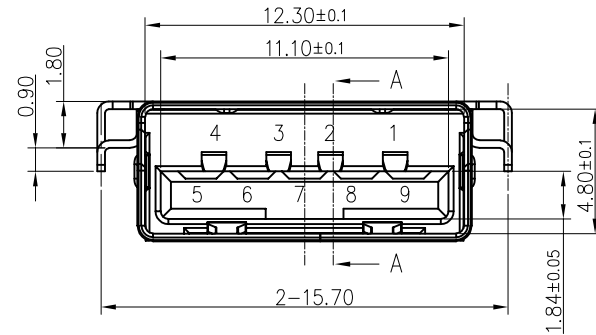

TOLERANCE: ± 0.05 , THICKNESS: 1.0~1.2mm
RECOMMENDED PCB LAYOUT
(TOP VIEW)

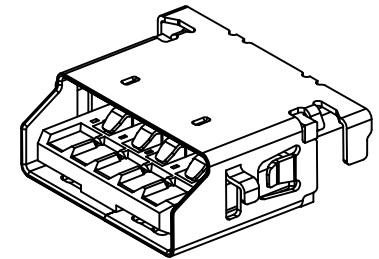

3D VIEW

NOTE:

1.MATERIAL:

- 1.1 HOUSING: HIGH TEMPERATURE PLASTIC UL94V-0, BLUE.
- 1.2 CONTACT: C5191 T=0.20mm
- 1.3 SHELL: SUS304 T=0.30mm

2.ELECTRICAL CHARACTERISTICS:

- 2.1 CONTACT RESISTANCE: 30mΩ Max
- 2.2 CONTACT CURRENT RATING: 1.5A
- 2.3 DIELECTRIC WITHSTANDING VOLTAGE: 100V AC R.M.S.
- 2.4 INSULATION RESISTANCE 100MΩ Min
- 2.5 OPERATING TEMPERATURE: -40°C~85°C
- 2.6 RATE VOLTAGE: 30V DC


3.MECHANICAL CHARACTERISTICS:

- 3.1 INSERTION FORCE: 35N Max
- 3.2 EXTRACTION FORCE: INITIAL 10N Min, AFTER TEST 8N Min
- 3.3 DURABILITY: 1500 CYCLES

4.PLATING:

- 4.1 TERMINAL CONTACT: G/F(0.8u" Au) PLATING ON CONTACT AREA
80u" MIN Matte Tin PLATED ON SOLDER AREA
30u" MIN. Ni UNDERPLATED OVERALL
- 4.2 SHELL: 50u" MIN. NICKEL ALL OVER

5.SALT SPRAY: 24H

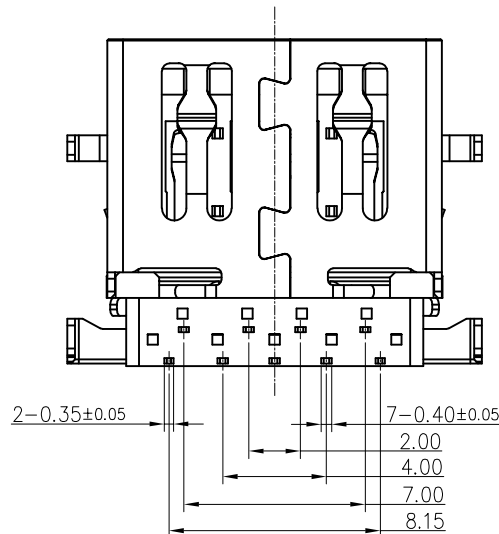

PIN NO.	1	2	3	4	
SIGNAL NAME	VBUS	D-	D+	GND	
REMARK	USB2.0 CONTACT PIN				
PIN NO.	5	6	7	8	9
SIGNAL NAME	SSRX-	SSRX+	GND	SSTX-	SSTX+
REMARK	USB3.0 CONTACT PIN				

MILLIMETERS	INCH
X. ° $\pm 2^\circ$	X. ° $\pm 2^\circ$
.X ± 0.30	.X ± 0.012
.XX ± 0.20	.XX ± 0.008
.XXX ± 0.10	.XXX ± 0.004
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DongGuan JinBiLai Metal Plastic Technology Co., Ltd. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DongGuan JinBiLai Metal Plastic Technology Co., Ltd.	




东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TITLE	USB3.0 短体12.50 反沉1.80 斜口四脚	DR		
PART NO.	XB-104013132	CHKD		
PRO J.	PAGE 1/2	UNITS	mm	APPD
SIZE	A4	SCALE	1:1	DIS NO.
XB-104013132				


ROHS

Direction of use

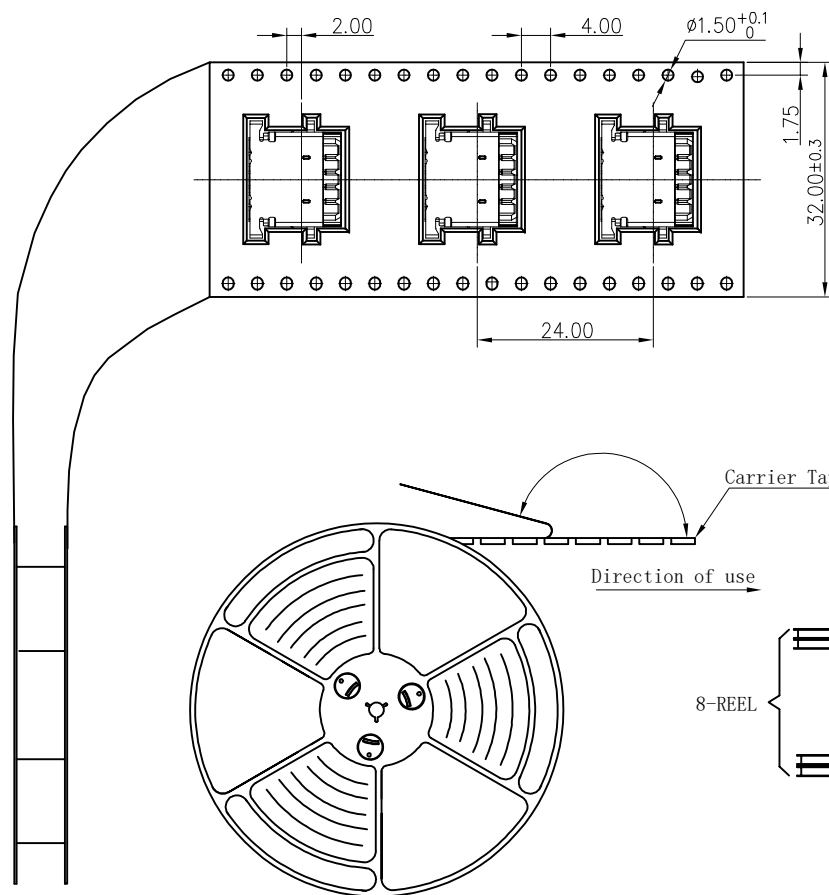


NOTES:

- 1、Packing quantity per plate: 400PCS/Plate
- 2、Loading and packing method

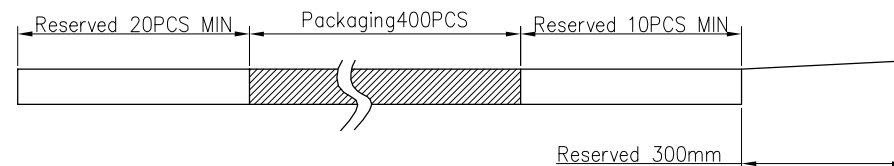

3、Total packaging: 3200PCS/Box

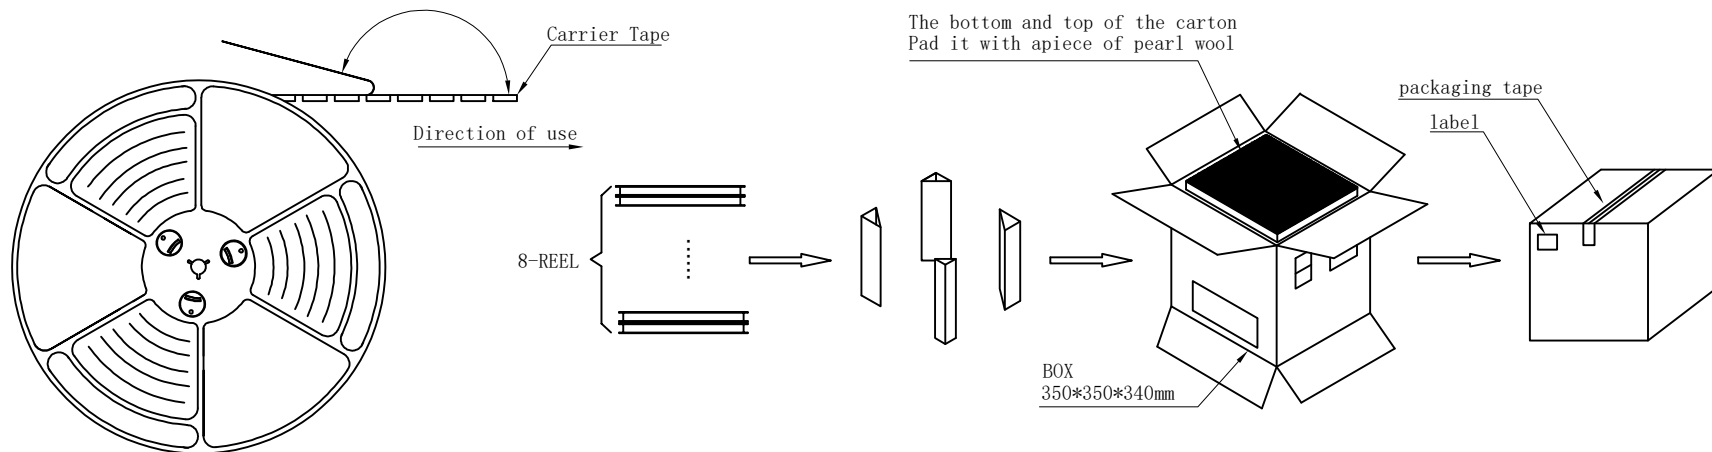

Part Number	Description	Quantity
303020127	Carrierband (Lucent, PET W=32 PH=24)	82.56M
303040009	Box (K=K, T=7.0, 350*350*340)	1PCS
303060001	PE Bag (T=0.08mm, 730*760*730)	1PCS
303070014	Self-adhesive (W=25.50)	84.96M
303110001	Beam (K=K, T=7.0, 95*95*290)	4PCS
303130001	Pearl Wool (340*340*18)	2PCS
303180021	REEL (BLUE, 13Inches*32mm, Φ330)	8PCS
104013132	USB3.0短体12.50反沉1.80斜口四脚	3200PCS

MILLIMETERS	INCH
X. ° ±2°	X. ° ±2°
.X ±0.30	.X ±0.012
.XX ±0.20	.XX ±0.008
.XXX ±0.10	.XXX ±0.004
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DongGuan JinBiLai Metal Plastic Technology Co., Ltd. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DongGuan JinBiLai Metal Plastic Technology Co., Ltd.	

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TITLE	USB3.0短体12.50反沉1.80斜口四脚	DR		
PART NUM.	104013132	CHKD		
PRO J.	PAGE	2/2	UNITS	mm
SIZE	A4	SCALE	1:1	DIS NO.
				XB-104013132