




1. MECHANICAL PERFORMANCE:
 - 1-1. INSERTION FORCE: 0.5~2.0kgf.
 - 1-2. REMOVAL FORCE: 0.8kgf~2.0kgf.
 - 1-3. DURABILITY: 10000 CYCLES.
2. ELECTRICAL PERFORMANCE,
 - 2-1. CURRENT RATING: 5.0A
VOLTAGE RATING: 5.0V
 - 2-2. LLCR:
VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX.
SHIELD: 50mΩ/MAX.
LLCR MAX. CHANGE OF ALL PINS: 10mΩ.
 - 2-3. INSULATION RESISTANCE: 100MΩ MIN
 - 2-4. DIELECTRIC WITHSTAND VOLTAGE, AC 100V FOR 1 MINUTE.
3. ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -25°C~+85°C.
4. IR REFLOW:
THE PEAK TEMPERATURE ON THE BOARD SHALL
BE MAINTAINED FOR 10 SECONDS AT 260°C.



PRODUCT NO.


① ② ③ ④ ⑤ ⑥

03C: 沉板1.0外壳点焊L6

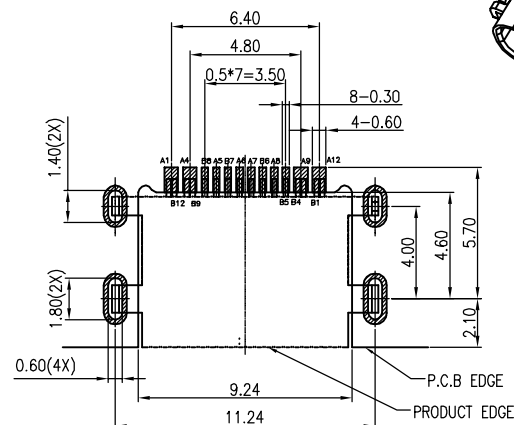

USB TYPE-C PIN ASSIGNMENTS

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME



4	FRONT SHELL	STAINLESS STEEL	Ni 30u" MIN. UNDER PLATED OVER ALL.	1PCS
3	MID PLATE	STAINLESS STEEL	CLEAR ONLY	1pcs
2	CONTACTS	COPPER ALLOY(C7025)	Au/Ni Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY




CUSTOMER DRAWING

XG 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.


GENERAL TOLERANCE X. .X ±0.20 .XX ±0.15 .XXX ±0.10	DRAWING	Bull			TITLE: USB TYPE C REC 16PIN (L=6.5) CH=0.58 (沉板1.00mm) 外壳点焊L6									
	APPROVED				P/N: XB-UC01-16CB**-03C									
ANGEL TOLERANCE X. ±3° .XX ±2° .XXX ±1°	DATE	2021. 02. 23			DRAWING NO. XB-C-UC01-03C									
		UNIT	mm	SCALE	1:1	SIZE	A4	SHEET	1of2	REV	A			

☐ Packing Notes:

1. Reel : 1300pcs/ Reel.
2. Carton : 14300pcs/ 11 Reel/ Carton.

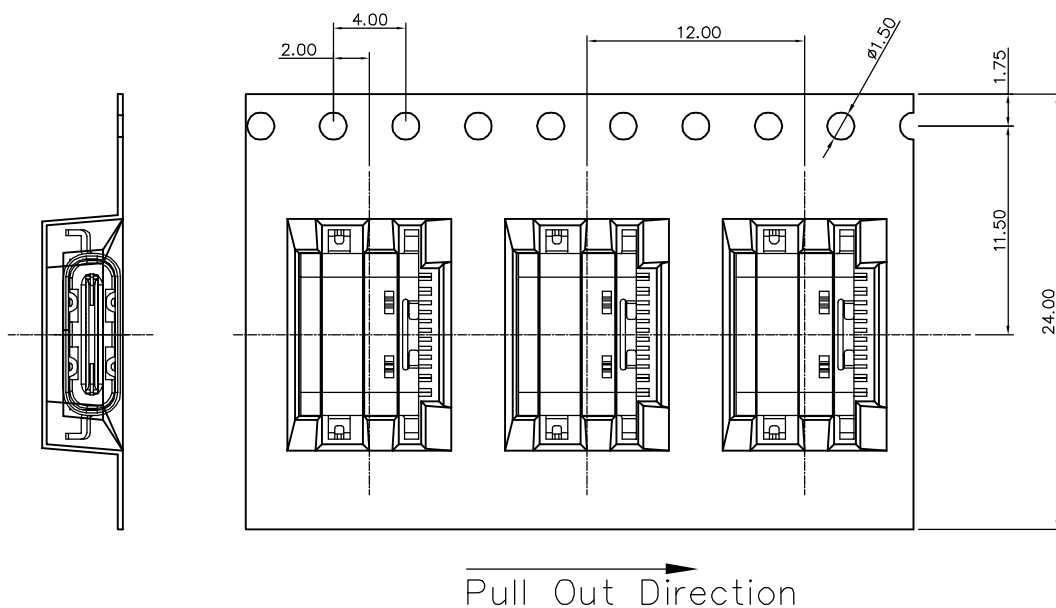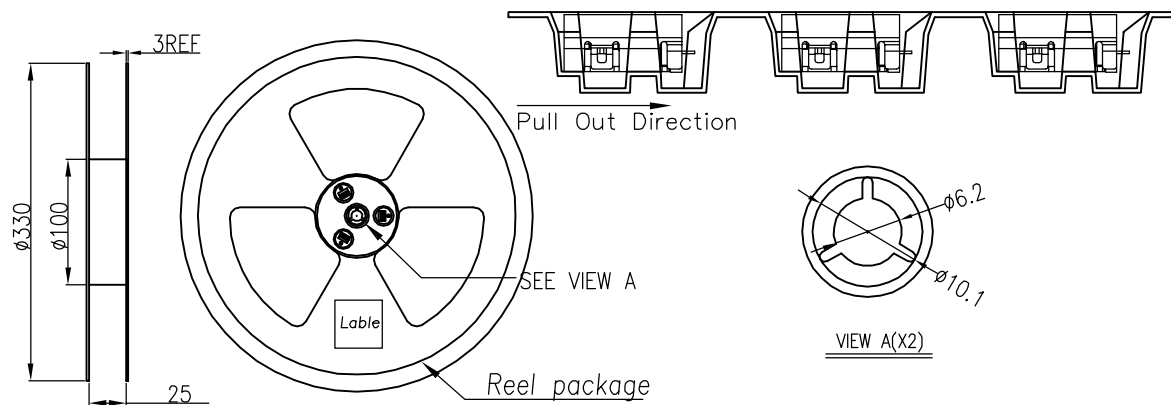


- 1) 用TAPE将纸箱封实.
- 2) 将标签贴于纸箱侧

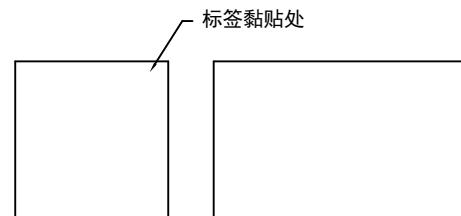

备 注 (REMARK)

- 1). 若有未装满之零数箱, 必须以缓冲材塞满.
- 2). 在搬运过程中要轻拿轻放.
- 3). 在运输中不可堆放过多, 不可有重压现象.
- 4). 上带在黏贴下带时必须平整, 且黏贴处不要出现气泡.

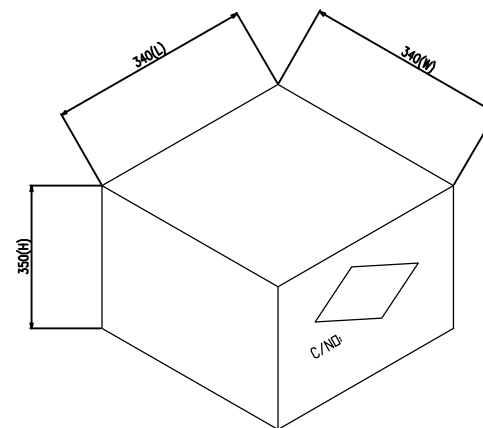

CUSTOMER
DRAWING



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

GENERAL TOLERANCE
X. ±0.20
.XX ±0.15
.XXX ±0.10

DRAWING

Bull.pan

TITLE: USB TYPE C REC 16PIN (L=6.5)
CH=0.58 (沉板1.00mm) 外壳点焊 包装图

APPROVED


P/N: XB-UC01-16CB**-03C

ANGEL TOLERANCE
X. ±3°
.XX ±2°
.XXX ±1°

DATE

2021.02.23

DRAWING NO. XB-C-UC01-03C



UNIT mm

SCALE

1:1

SIZE

A4

SHEET

2of2

REV

A