
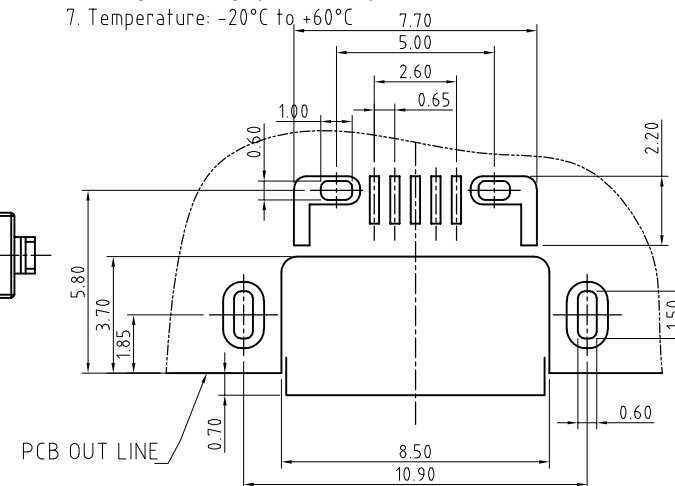

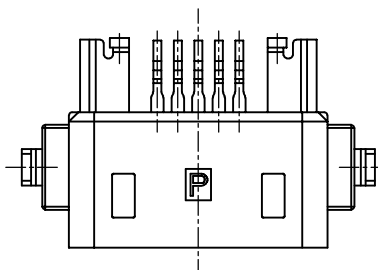
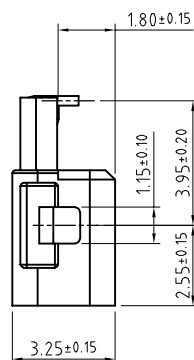
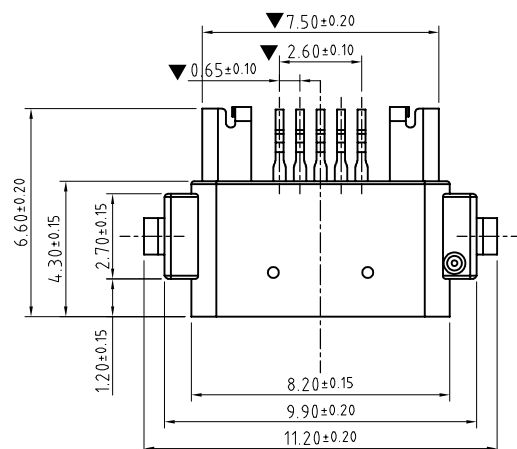



Notes:


1. Dimension shall be interpreted per ASME Y14.5M1994.
2. Dimension marked ∇ & $\blacktriangledown$ should be checked by Q.C. and process, engineers and ∇ should also check the CPK data.


Specification:

1. Current Rating: 1.0 AMP
2. Voltage Rating: 30V AC,DC
3. Dielectric Strength: 500V AC RMS for 1 minute.
4. Contact Resistance: 30 m Ω Max.
5. Insulator Resistance: 500M Ω Min. AT 250V DC.
6. Mating/Unmating cycles: 2000cycles
7. Temperature: -20°C to +60°C

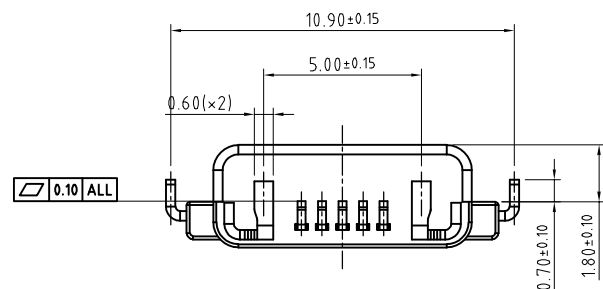


P.C.B LAYOUT

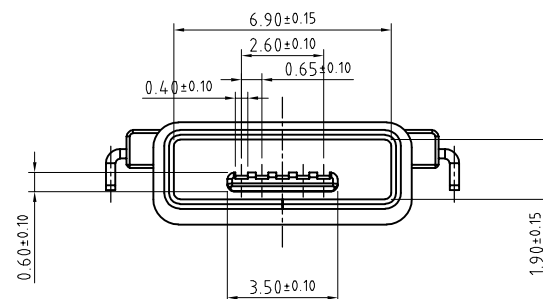





3	Shell	1	C2680R-H Au/Ni Plating T=0.30mm	
2	Contact	5	Phosphor bronze C5210R-EH Au/Ni Plating T=0.20mm	
1	Housing	1	PA9T&LCP (G.F30%)	
ITEM	PART NAME	Q'TY	FINISH	NOTE
X.	±0.50	X° ±2°	UNITS mm	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.
.X	±0.30	X° ±1°		
.XX	±0.10	.XX° ±0.5°	MAT'L	
XXX	±0.05			
		FINISH	APPD:	TITLE: Micro USB 5Pin SMT (AB) Type (沉板平口防水型)
			CHKD:	
		Q'TY	DR: Steven.Xie 2021/03/19	DWG NO.: XB-L36 (YJ006)
				 SCALE SHEET REV. 1/1 1/1 A1

CAD GENERATED DRAWING. DON'T CHANGE BY HAND.


REV.	ECN. NO.	APPD.

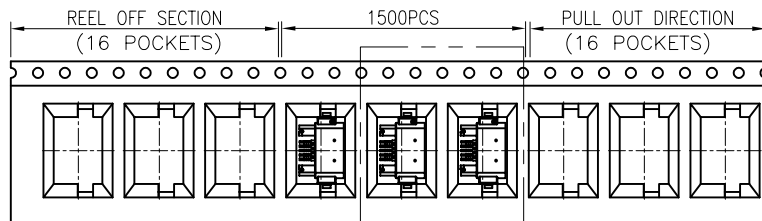

SEE DETAIL X

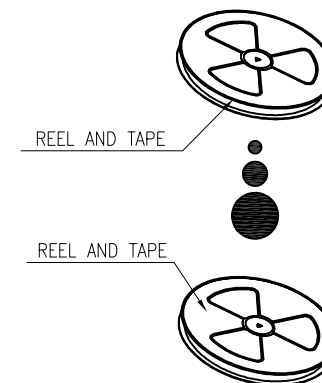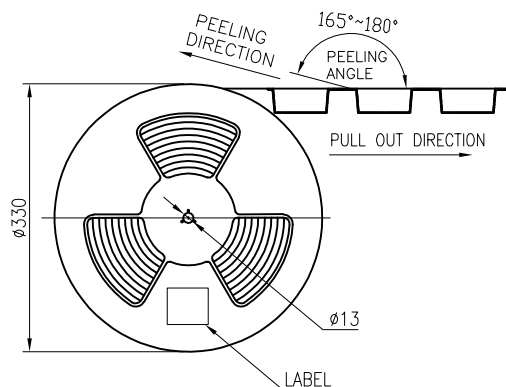

	REEL	CARTON
CONNECTOR (PCS)	1500	15000

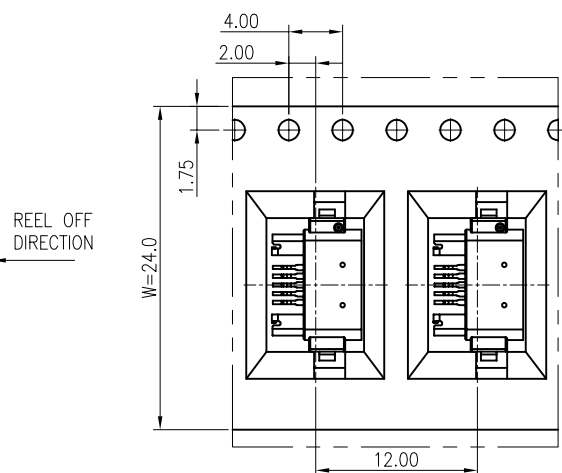

X.	± 0.50	X.°	± 2°	UNITS	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	PART NO. (INTENDED USE)	TITLE: Micro USB 5Pin SMT Type (AB Type 流板平口防水型 IP66)
.X	± 0.30	X.°	± 1°	mm			
.XX	± 0.10	.XX°	± 0.5°	MAT'L	/	APPD:	DWG NO.:
.XXX	± 0.05						
				FINISH	/	CHKD:	XB-L36(YJ006) USB
				Q'TY		DR: Steven.Xie 2021/08/19	