
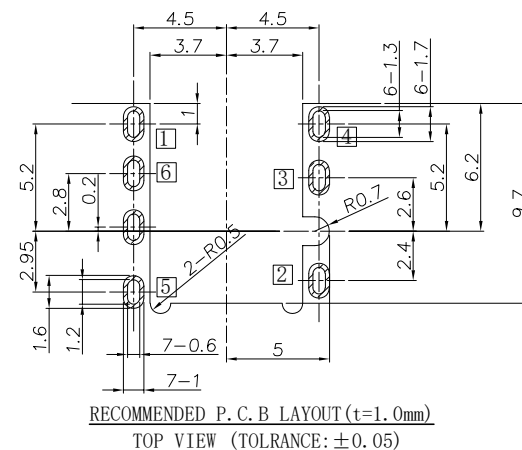
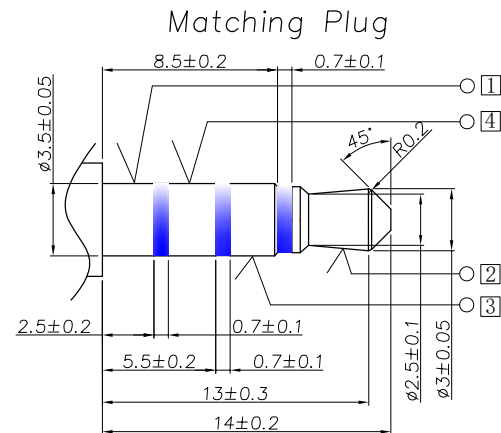

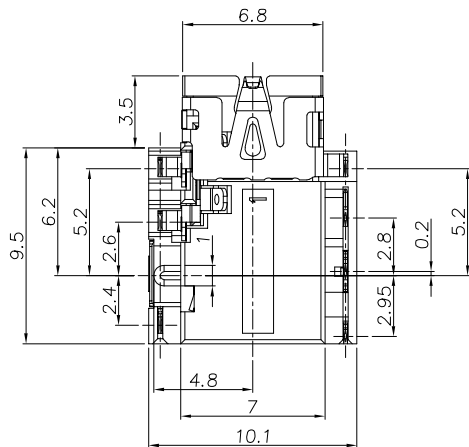


1. Electrical characteristics

-
- Figure 1 shows the dimensions and components of the connector. The top view includes a 'DATE CODE' label. The 3D view shows the following components:
- 1: Pin 1
 - 2: Pin 2
 - 3: Pin 3
 - 4: Pin 4
 - 5: Pin 5
 - 6: Pin 6
 - 7: Pin 7
 - 8: Pin 8
 - 9: Pin 9

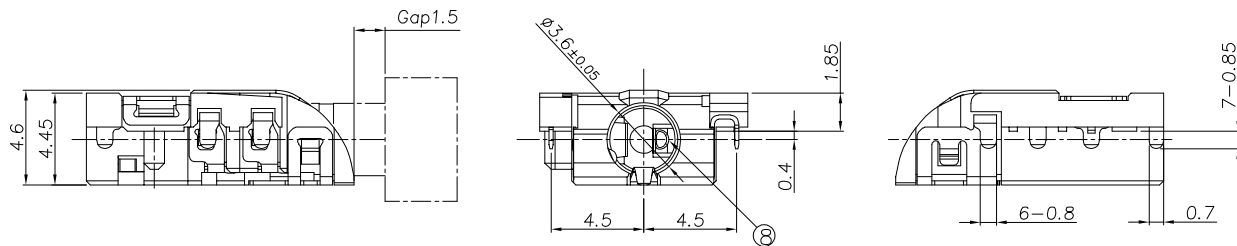

- (1) Series no.
- (2) Schematic type: A, B, C
- (3) Housing color:
BK7=Black
- (4) Terminal plating:
AS04=Plating Tin/Gold 5" min.
- (5) Packing mode:L=Reel packing
- (6) Environmental requirements:
RH=RoHS 2.0 + Halogen Free

9	Housing	1	PA10T R630NH+30%GF UL 94V-0	Black
8	Insulator	1	PA10T R630NH+30%GF UL 94V-0	Black
6	Shunt terminal [6]	1	Phosphor bronze, 0.20t	Gold Flash On Contact Area Tin Plating on Solder Tail Area, All over Nickel Plated
5	Transfer Spring [5]	1	Phosphor bronze, 0.20t	Gold Flash On Contact Area And Solder Tail Area, All over Nickel Plated
7	shell	1	Phosphor bronze, 0.20t	Tin Plating on Solder Tail Area, All over Nickel Plated
4	Ring spring [4]	1	Phosphor bronze, 0.20t	Au5u" On Contact Area Tin Plating
3	Ring spring [3]	1	Phosphor bronze, 0.20t	On Solder Tail , All over Nickel Plated
2	Tip spring [2]	1	Phosphor bronze, 0.20t	
1	Earth spring [1]	1	Phosphor bronze, 0.20t	Au5u" On Contact Area Gold Flash on Solder Tail All over Nickel Plated
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

						Angle	±2°	DESIGN	李海鸥	2015. 05. 21		 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.		
						10<L≤20	±0.3	CHECK						
						5<L≤10	±0.25						TITLE:	φ3.5mm PHONE JACK
	A-0	2015. 05. 21	NEW	李海鸥	余 军	L≤5	±0.20	APPROVAL					MODEL NO.	XB-PJ-D32610-ABK7AS04L-RH
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: 3:1	UNIT:mm	A4 	SHEET:1 of 1	FILE NO.	Q/SSY.QW-001A-0524	