
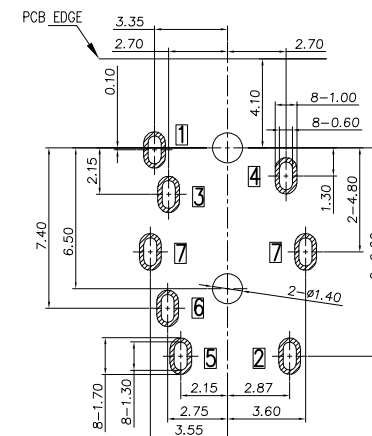
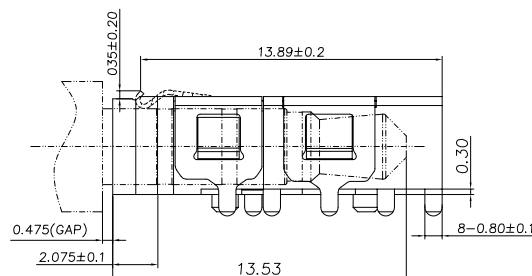

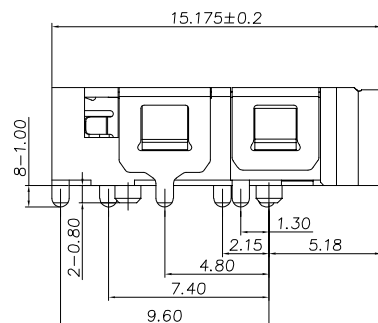
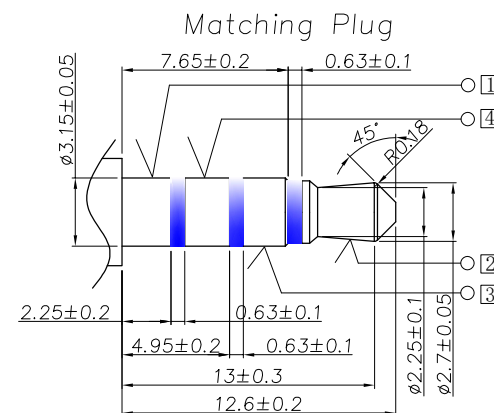




(1)	(2)	(3)	(4)	(5)	(6)
-----	-----	-----	-----	-----	-----

- [illegible]

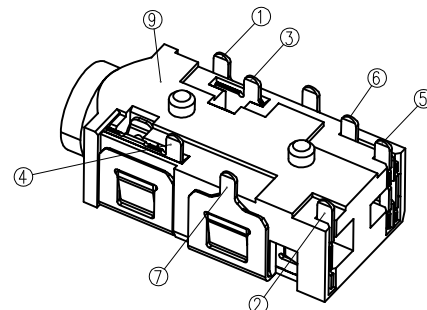

RECOMMENDED PCB LAYOUT(TOP VIEW)
(GENERAL TOLERANCE ± 0.05)

Unmating force: 3~30N.



9	Housing	1	HIGH TEMPERATURE PLASTIC	Black
8	Insulator	1	HIGH TEMPERATURE PLASTIC	Black
7	Shell	1	Phosphor bronze, 0.20t	Gold Flash On Contact Area and on Solder Tail Area, All over Nickel Plated
6	Shunt terminal [6]	1	Phosphor bronze, 0.20t	
5	Transfer Spring [5]	1	Phosphor bronze, 0.20t	
4	Ring spring [4]	1	Phosphor bronze, 0.20t	
3	Ring spring [3]	1	Phosphor bronze, 0.20t	
2	Tip spring [2]	1	Phosphor bronze, 0.20t	
1	Earth spring [1]	1	Phosphor bronze, 0.20t	
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

						Angle	±2°	DESIGN	罗振强	2017. 05. 04	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
						. x	±0. 35	CHECK				CUSTOMER DRAWING	TITLE:	Ø3.5mm PHONE JACK
						. xx	±0. 25						MODEL NO.	XB-PJ-D32910-ABK7AU02L-RH
	A-0	2017. 05. 04	NEW	罗振强	刘 伟	. xxx	±0. 10	APPROVAL				FILE NO.	Q/DY. QW-001A-0599	
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: 1:1	UNIT:mm	A4 	SHEET:1 of 1			