


Product Details specification 产品规格书

Title 产品名称	File No.	Version	Date	Page
XB-SW-31 50-30滚珠开关	XB-SW-3D-299	2023-A1	2023.1.19	4/5

SIZE尺寸

Unit: mm,
Tolerance ± 0.15

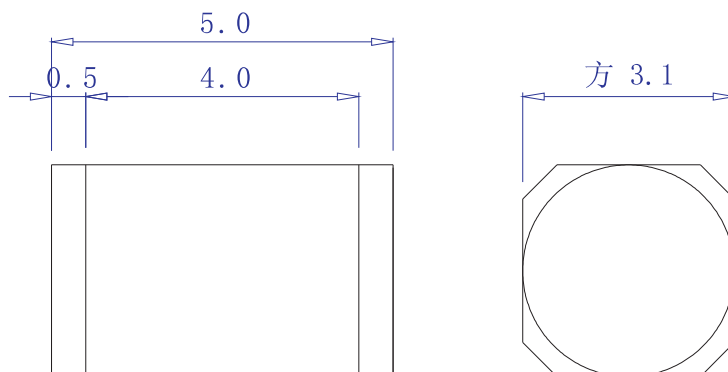

SALT SPRAY TESTING 盐雾测试

1. Copper plug need to support $350 \pm 5^\circ\text{C}$ / 3seconds after welding, Put the samples into testing box.

And in the testing box temperature is 35°C degree.

铜塞承受 $350 \pm 5^\circ\text{C}$ / 3秒焊接后, 将样品放在 35°C 试验箱内。

2. The test solution: NACL, Solution concentration 5%, Solution PH value of 6.9.

试验箱溶液: NACL, 溶液浓度5%, 溶液PH值6.9。

3. The precipitation amount: 1.2ml/80cm²/h. 沉淀量: 1.2ml/80cm² /h。

4. The test of time: 24h. 试验时间: 24h。

5. Judgment standard: No embroidered patches, No Corrosion, No electrical damage, No chemical reaction or Sundries etc.

判定标准: 无锈斑、无腐蚀变色、无电气损坏、无化学反应和杂物等现象。

Note 注意事项

1. If the product used for high security products and durability of extremely high equipment (such as life safety equipment, aviation facilities, disaster prevention device),

please confirm whether a share, can seek advice our company for details.

如果该产品要用于高安全性产品及耐久性极高的设备中 (如生命安全设备、航空设施、防灾装置), 请确认是否合用, 或咨询我司了解详情。

2. In case of fire, Please do not overload applicable.

请勿超负荷使用, 以防发生火灾。

3. The welding temperature or time more than standard, can cause switch collapse.

焊接温度或时间超过规范时, 会造成开关解体。

4. Do not use water solubility flux. May cause damage to the switch.

勿使用水溶性助焊剂、可能会造成开关损坏。

5. Do not use solvent wash switch.

勿使用溶剂清洗开关。

6. This switch conduction rate of 98% (conductivity rate per 100 times value switch actions, can good conduction ratio).

本开关导通率为98%以上 (导通率是指开关每100次动作中, 可以良好导通的比率)。

7. Xibang company is only responsible for the defective problems of the product itself, return and exchange the defective products, and does not bear other joint and several expenses.

溪榜公司只承担本产品本身不良问题, 对不良品进行退换货, 不承担其它连带费用责任。