


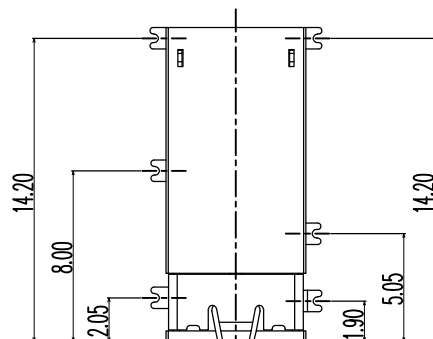
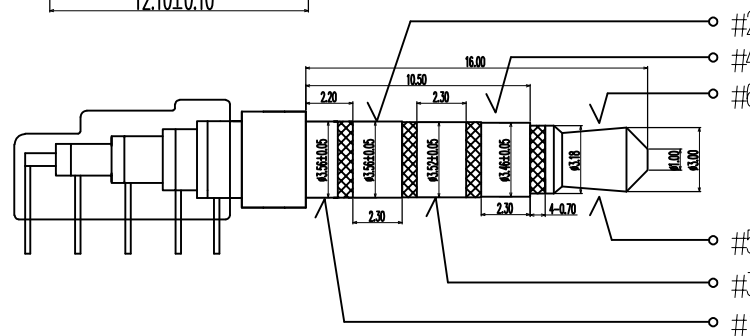
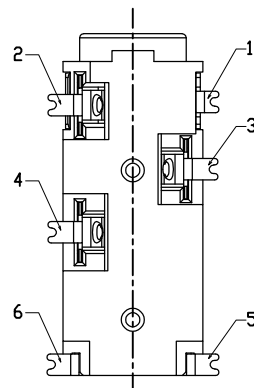



REV.	ECN. NO.	DESCRIPTION	ENG	DATE
A		INITIAL	Kai	07/22/20'


1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 100 mΩ MAX.;
3. INSULATION RESISTANCE: 1000Ω MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;

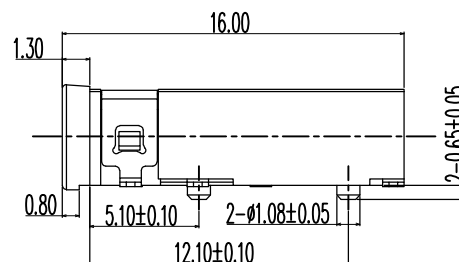


3D VIEW

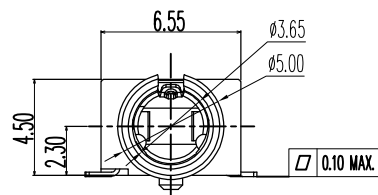

(Ø3.50mm 5 POLE PLUG DETAIL DRAWING)

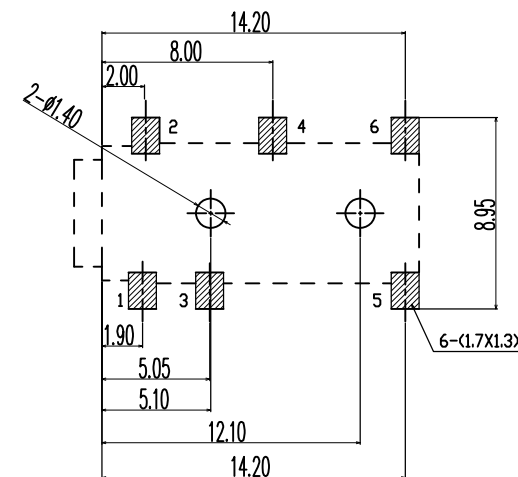

P.C.B LAYOUT
TOP VIEW



SCHEMATIC

5	HOUSING	1	HIGH TEMP PLASTIC,COLOR BLACK.	
4	TERMINAL 4#	1	STAINLESS STEEL; NICKEL UNDER PLATING OVERALL, GOLD FLASH PLATING ON SOLDER AREA; GOLD FLASH PLATING ON CONTACT AREA	T=0.20mm
3	TERMINAL 3#	1	STAINLESS STEEL; NICKEL UNDER PLATING OVERALL, GOLD FLASH PLATING ON SOLDER AREA; GOLD FLASH PLATING ON CONTACT AREA	T=0.20mm
2	TERMINAL 2#	3	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL, GOLD FLASH PLATING ON SOLDER AREA; GOLD FLASH PLATING ON CONTACT AREA	T=0.20mm
1	TERMINAL 1#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL, GOLD FLASH PLATING OVERALL;	T=0.20mm
ITEM	NAME	Q'TY	DESCRIPTION	NOTE

MEASURE POINT:
QUADRANT POINT
TANGENCY POINT
INTERSECTION POINT



UNLESS OTHERWISE SPECIFIED, TOLERANCE:
X. ±0.25
X.x ±0.20
X.xx ±0.15
X.xxx ±0.10
ANGULAR ±3'

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONIC CO., LTD.

DESIGN: Kai	DATE: 2020/07/22	TITLE:
CHECKED: /	DATE: /	Ø3.5 5 PHONE JACK CONNECTOR
APPROVED: Lucky	DATE: 2020/07/22	
PART NO. PJ35A079-F06J1BR-B	REV.: A	SCALE: 1:1
DRAWING NO.	SIZE: A4	SHEET: 1/1
		UNIT: mm