

1

2

3

4




5

6




7

8

REV	EC#	DESCRIPTION	DATE	APPROVED
A		新版发行	2019.12.30	

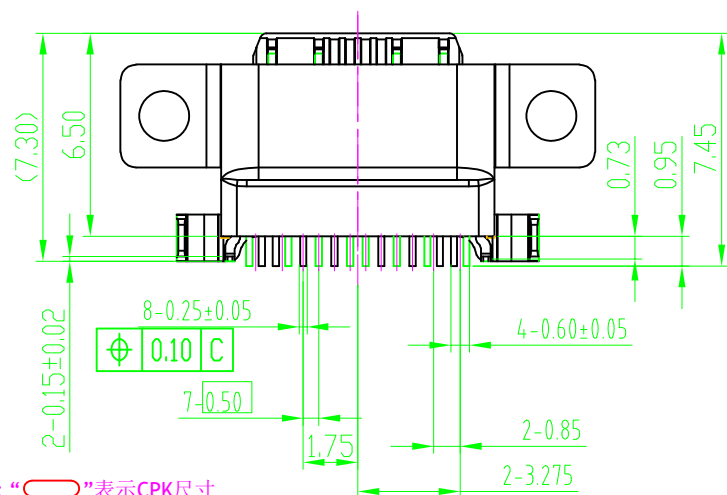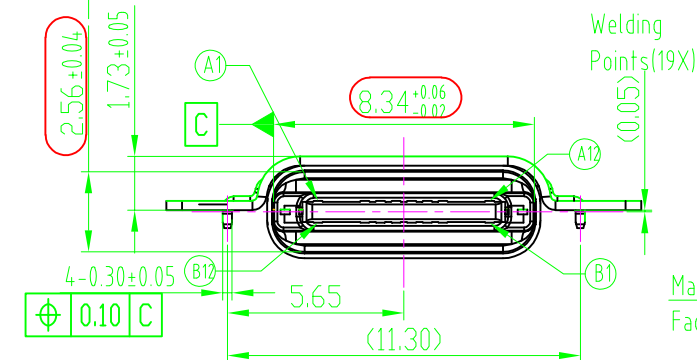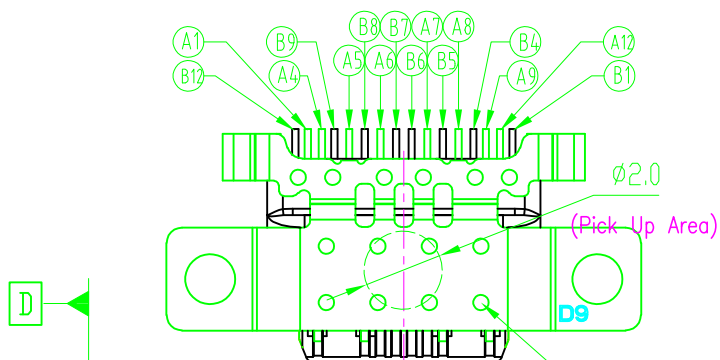

注1: “ ”表示CPK尺寸

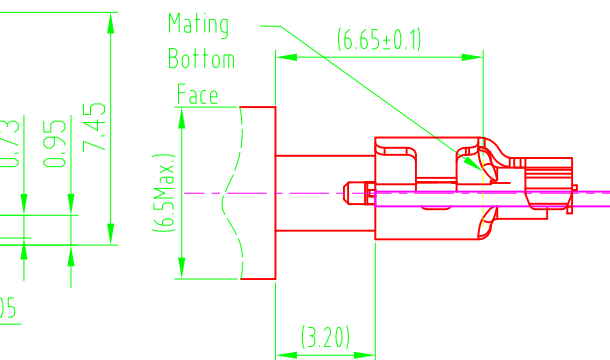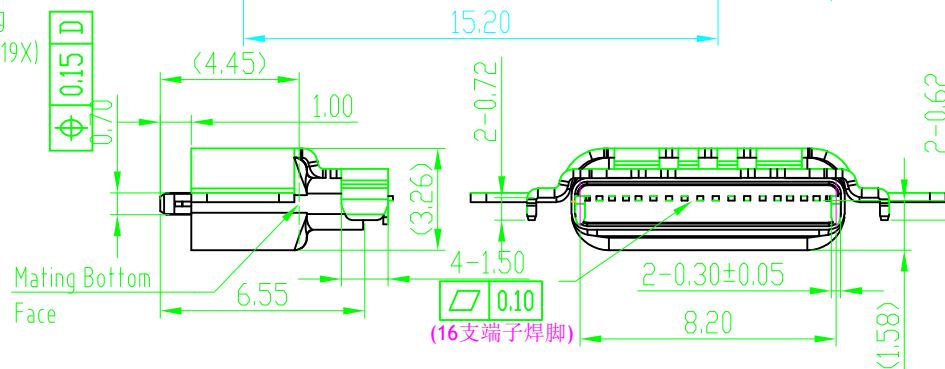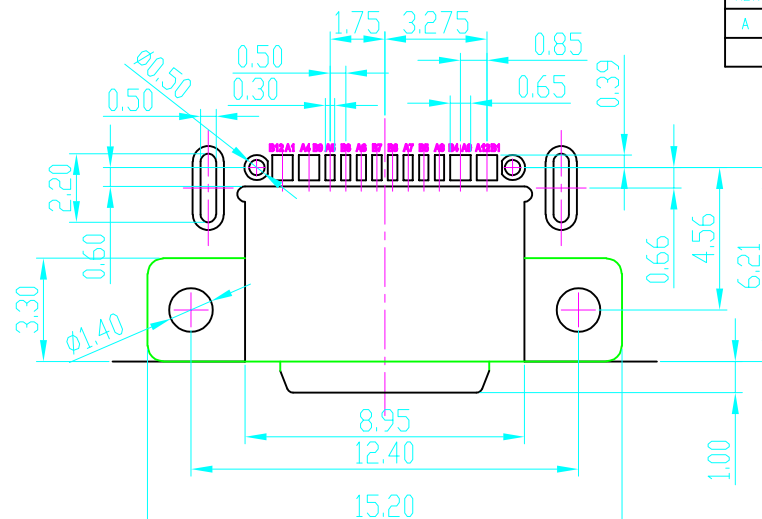

Mated Condition(REF.)

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

Pin Assignments

Contact Number	Signal Name	Contact Number	Signal Name
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

8	TOP SHELL	STAINLESS STEEL	Ti/Ni Plated	1PCS
7	SHELL	STAINLESS STEEL	Ni Plated	1PCS
6	OVER MOLDING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
5	TOP I/M	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
4	BOTTOM I/M	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
3	MID PLATE	STAINLESS STEEL	Ti/Ni Plated	1PCS
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

TOLERANCES UNLESS OTHERWISE SPECIFIED		X 东 莞 市 溪 榜 电 子 有 限 公 司	
GENERAL		DONG GUAN XI BANG ELECTRONICS CO., LTD.	
X ±0.38		APPROVED	
X ±0.25		DATE	
XX ±0.15		CHECKED	
XXX ±0.05		DATE	
X' ±0.30		DESIGN	
X' ±0.20		DATE	
XX' ±0.10		2019.12.30	
SCALE		SHEET 1 OF 1	
UNIT		M/M	
DRAWING		SERIES M(X3/D9)	
DATE		2019.12.30	
REV		A	