

RoHS
Compliant





SYMBOL

REVISION

APPROVAL


DATE

6.50±0.20 (DIM:A)
5.50±0.20 (DIM:A-1)
4.00±0.15 (DIM:B)




3D VIEW

No.of Pins	Dimension		
	DIM.A	DIM.B	DIM.C
02	4.50	2.00	3.90
03	6.50	4.00	5.90
04	8.50	6.00	7.90
05	10.50	8.00	9.90
06	12.50	10.00	11.90
07	14.50	12.00	13.90
08	16.50	14.00	15.90
09	18.50	16.00	17.90
10	20.50	18.00	19.90



5.90±0.15 (DIM:C)

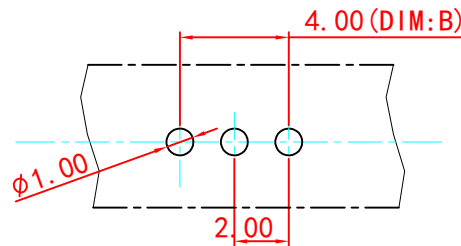

RECOMMENDED P.C.BOARD LAYOUT

Material
Insulator : LCP
Contact : C2680
Contact Plated : Gold over Nickel or Tin
Specification
Current Rating : 3A
Instant Current : 5A
Contact Resistance : 30mΩ
Insulation Resistance : 100MΩ
Dielectric Voltage : 500V
Operating Temperature : -40°~105°

2	HOUSING	LCP	1	GRAY
1	CONTACT TERMINAL	C2680	3	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING

XGB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		CONNECTOR		DRAWING	DONG.PANG	DWG.No.	
PART NO.		XB-A00M-3P-R1		CHECK	ZENQ.CHEN	REV.	A1
	UNIT:	TOLERANCE	UP TO 5 ABOVE 5~30 ABOVE 30 ANGLE	±0.2 ±0.3 ±0.5 ±3°	ANGLE	APPROVAL	LIANG.WU
	mm	OTHERWISE			0°±3°	SCALE	2:1
				DATE	08-08-2018	PAGE	1 OF 1