

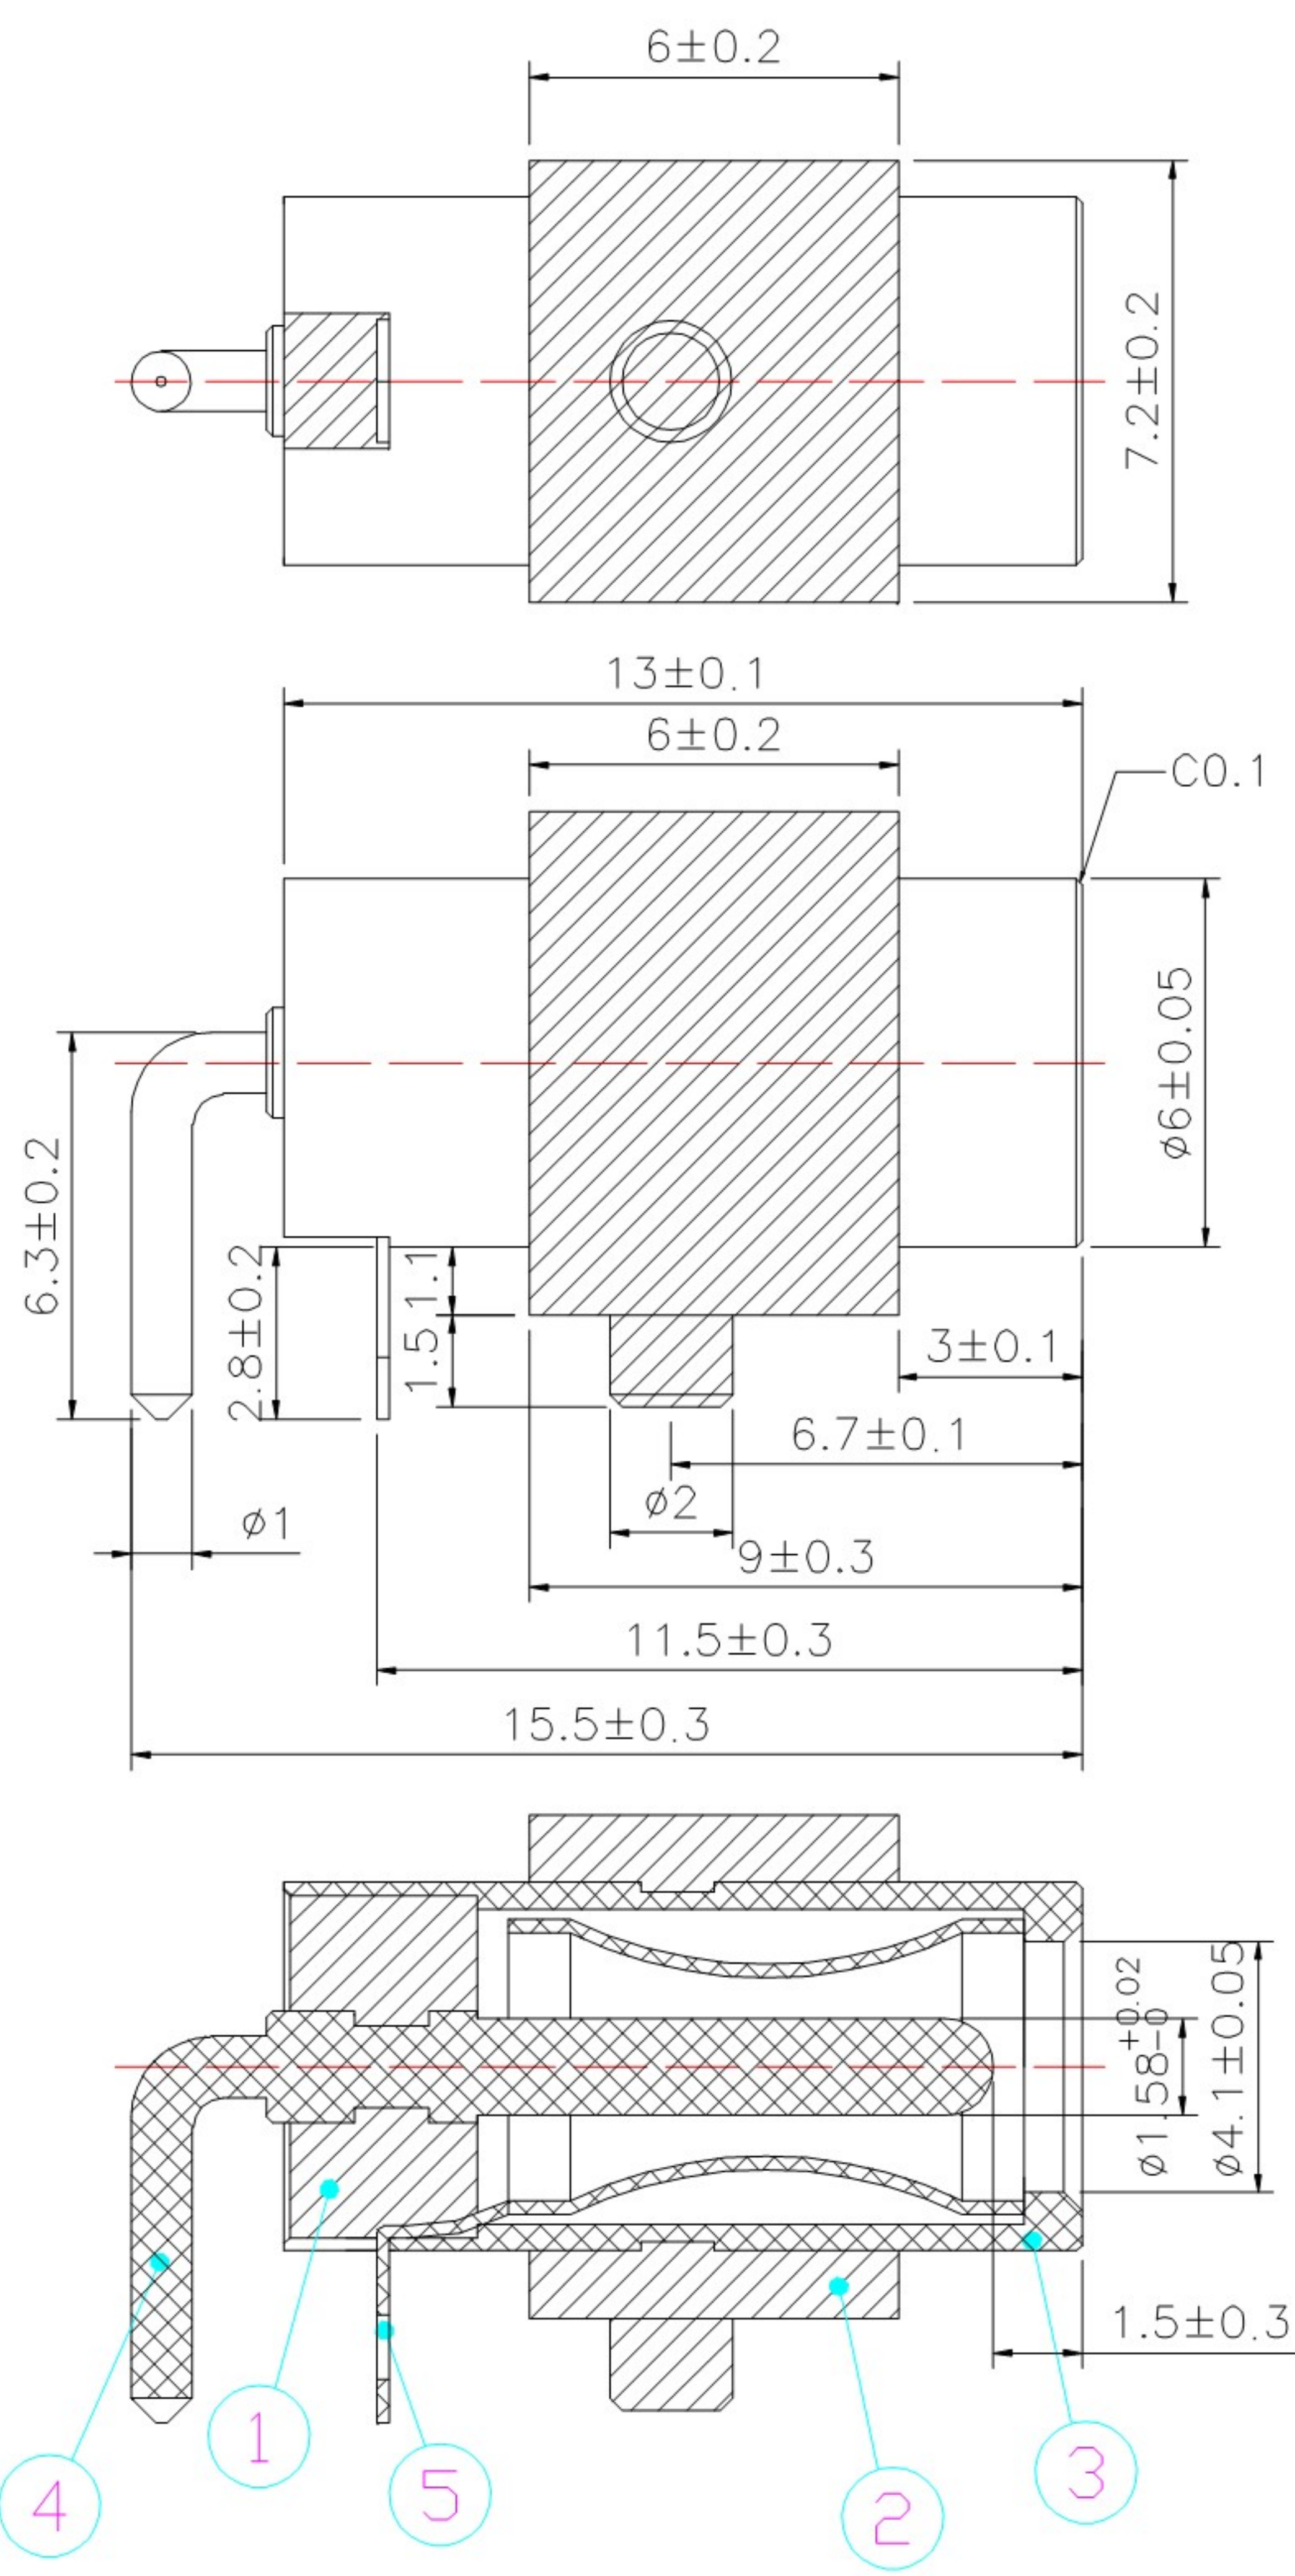


ROHS


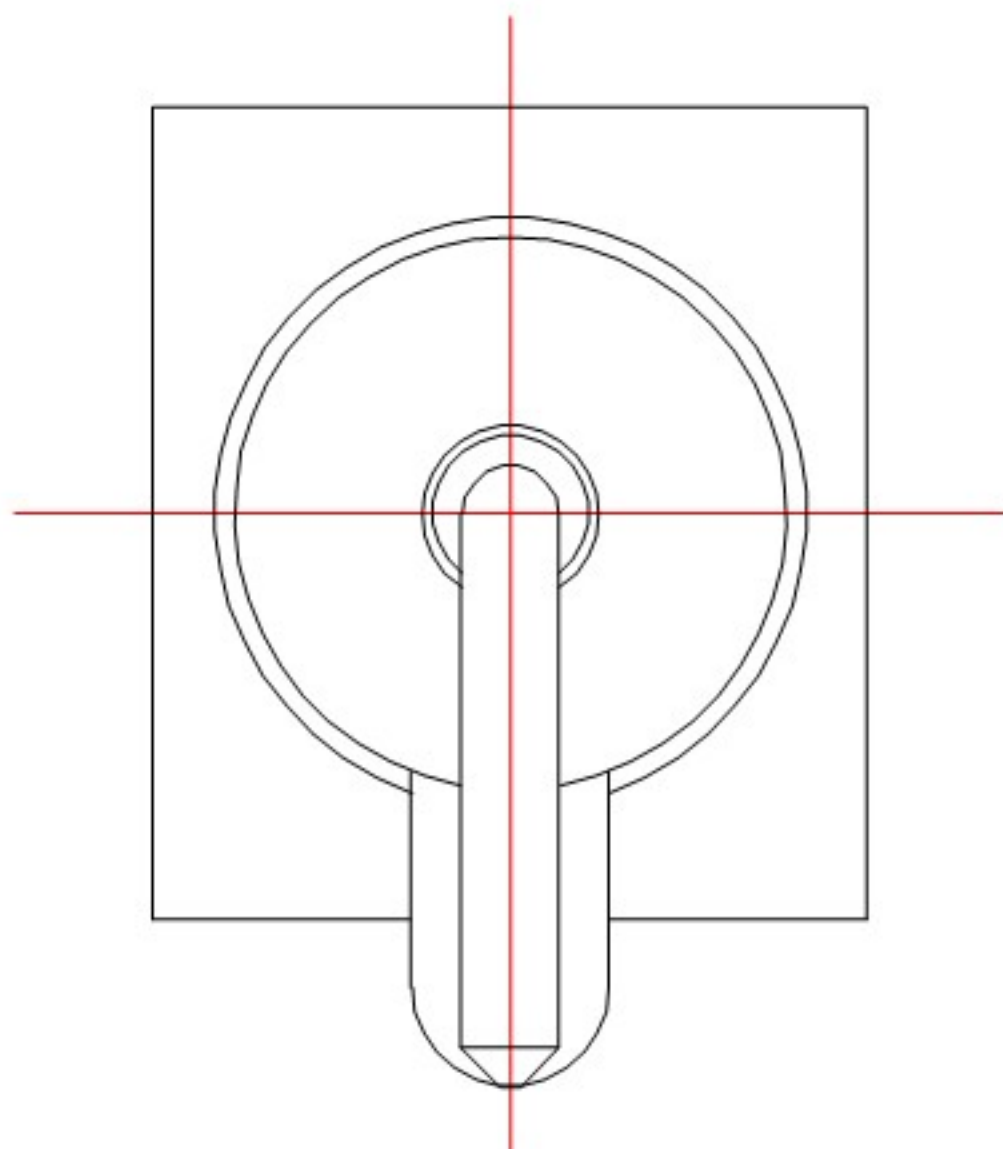


版 本 REV	修正标记 REV.LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签 名 SIGN	日 期 DATE
V1.0		新版制定		June	20190620

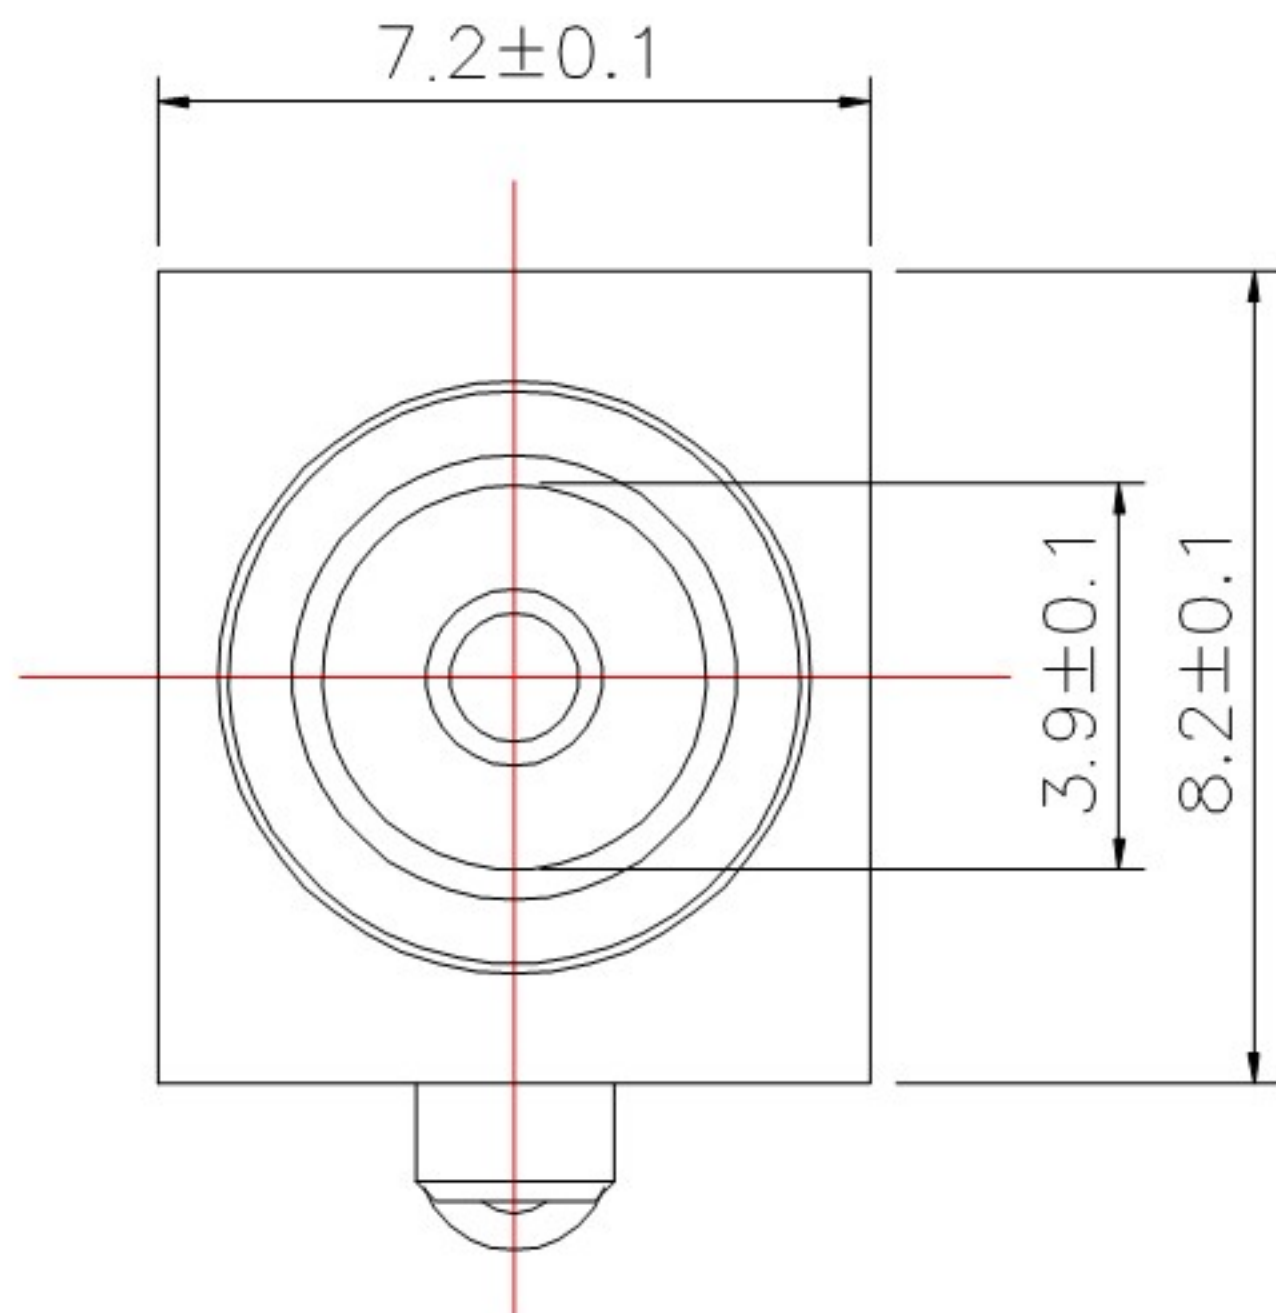

Technology Request:

- 1.Outlook:No burr, no hurt.
- 2.Electronic performance:
 - a:Insulation resistance: Above DC500V/100MΩ;
 - b:Endure voltage:AC500V at 1 minute;
 - c>Contact resistance:Under 30mΩ;
- 3.Insertion force & withdrawal force:0.3—3kgf.
- 4.Salt spray test:24H.
- 5.Meet RoHS.
- 6.Remark * is important specification.

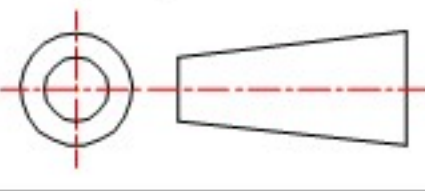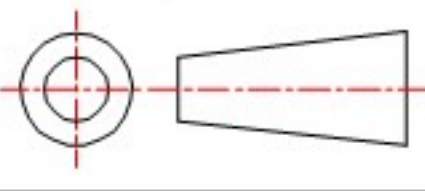单位 Unit	mm	一般公差 The general tolerance	7				核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.
			6							
			5	4.8*14带尾弹圈	C5191	NI 1~3um				
			4	1.58*1.8*19.5*1.0退火针	C3604	NI 1~3um				
			3	6*13*4.1管	C3604	NI 1~3um				
			2	PLASTIC	ABS	BLACK				
比例 Scale	5:1	xx.:±0.3	1	PLASTIC	PBT	BLACK	June	杨义邦	李莹峰	规格 DESCRIPTION: DC JACK Ø4.0*1.7*15.5
			NO.	PART	MATERIAL	PLATING				
视图 Third angle projection		x.x:±0.1					June	杨义邦	李莹峰	品 名 P/N: 4017JL60方胶插拔式
		.xx:±0.05					June	杨义邦	李莹峰	图 号 DRAWN NO: CP-03-0145