
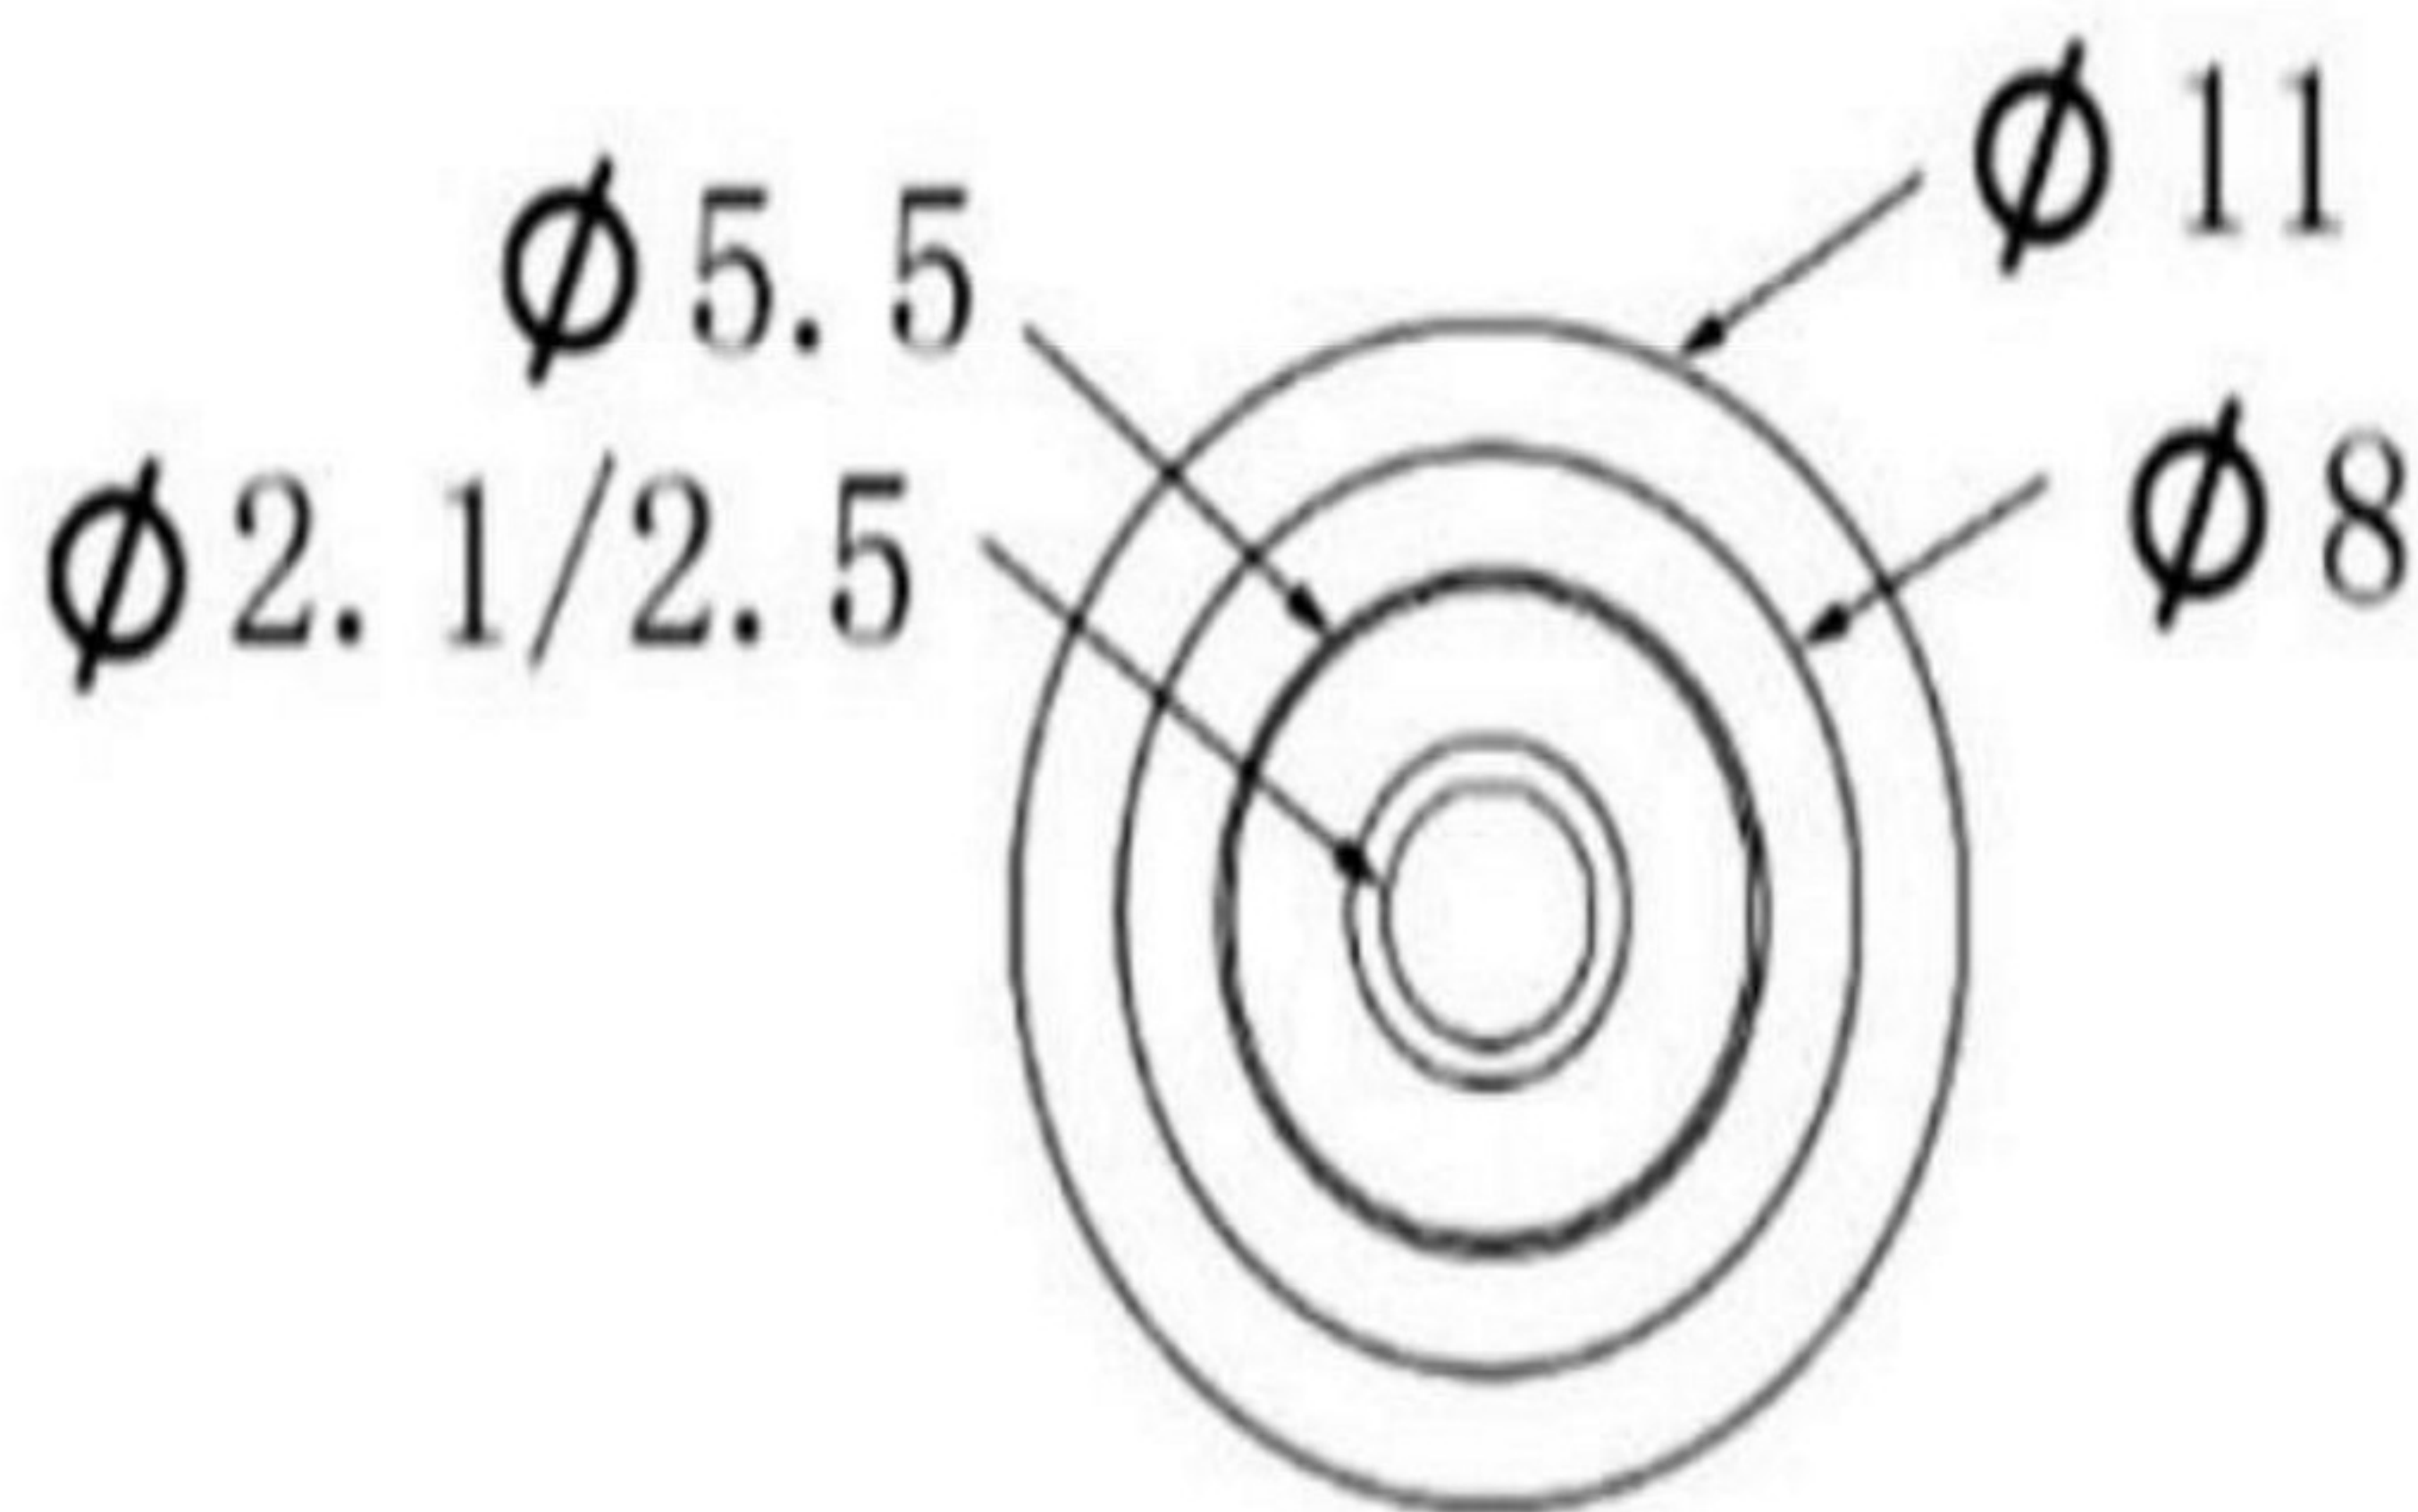


REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A	XXXXXXX	INITIAL	Kai	2018.05.11

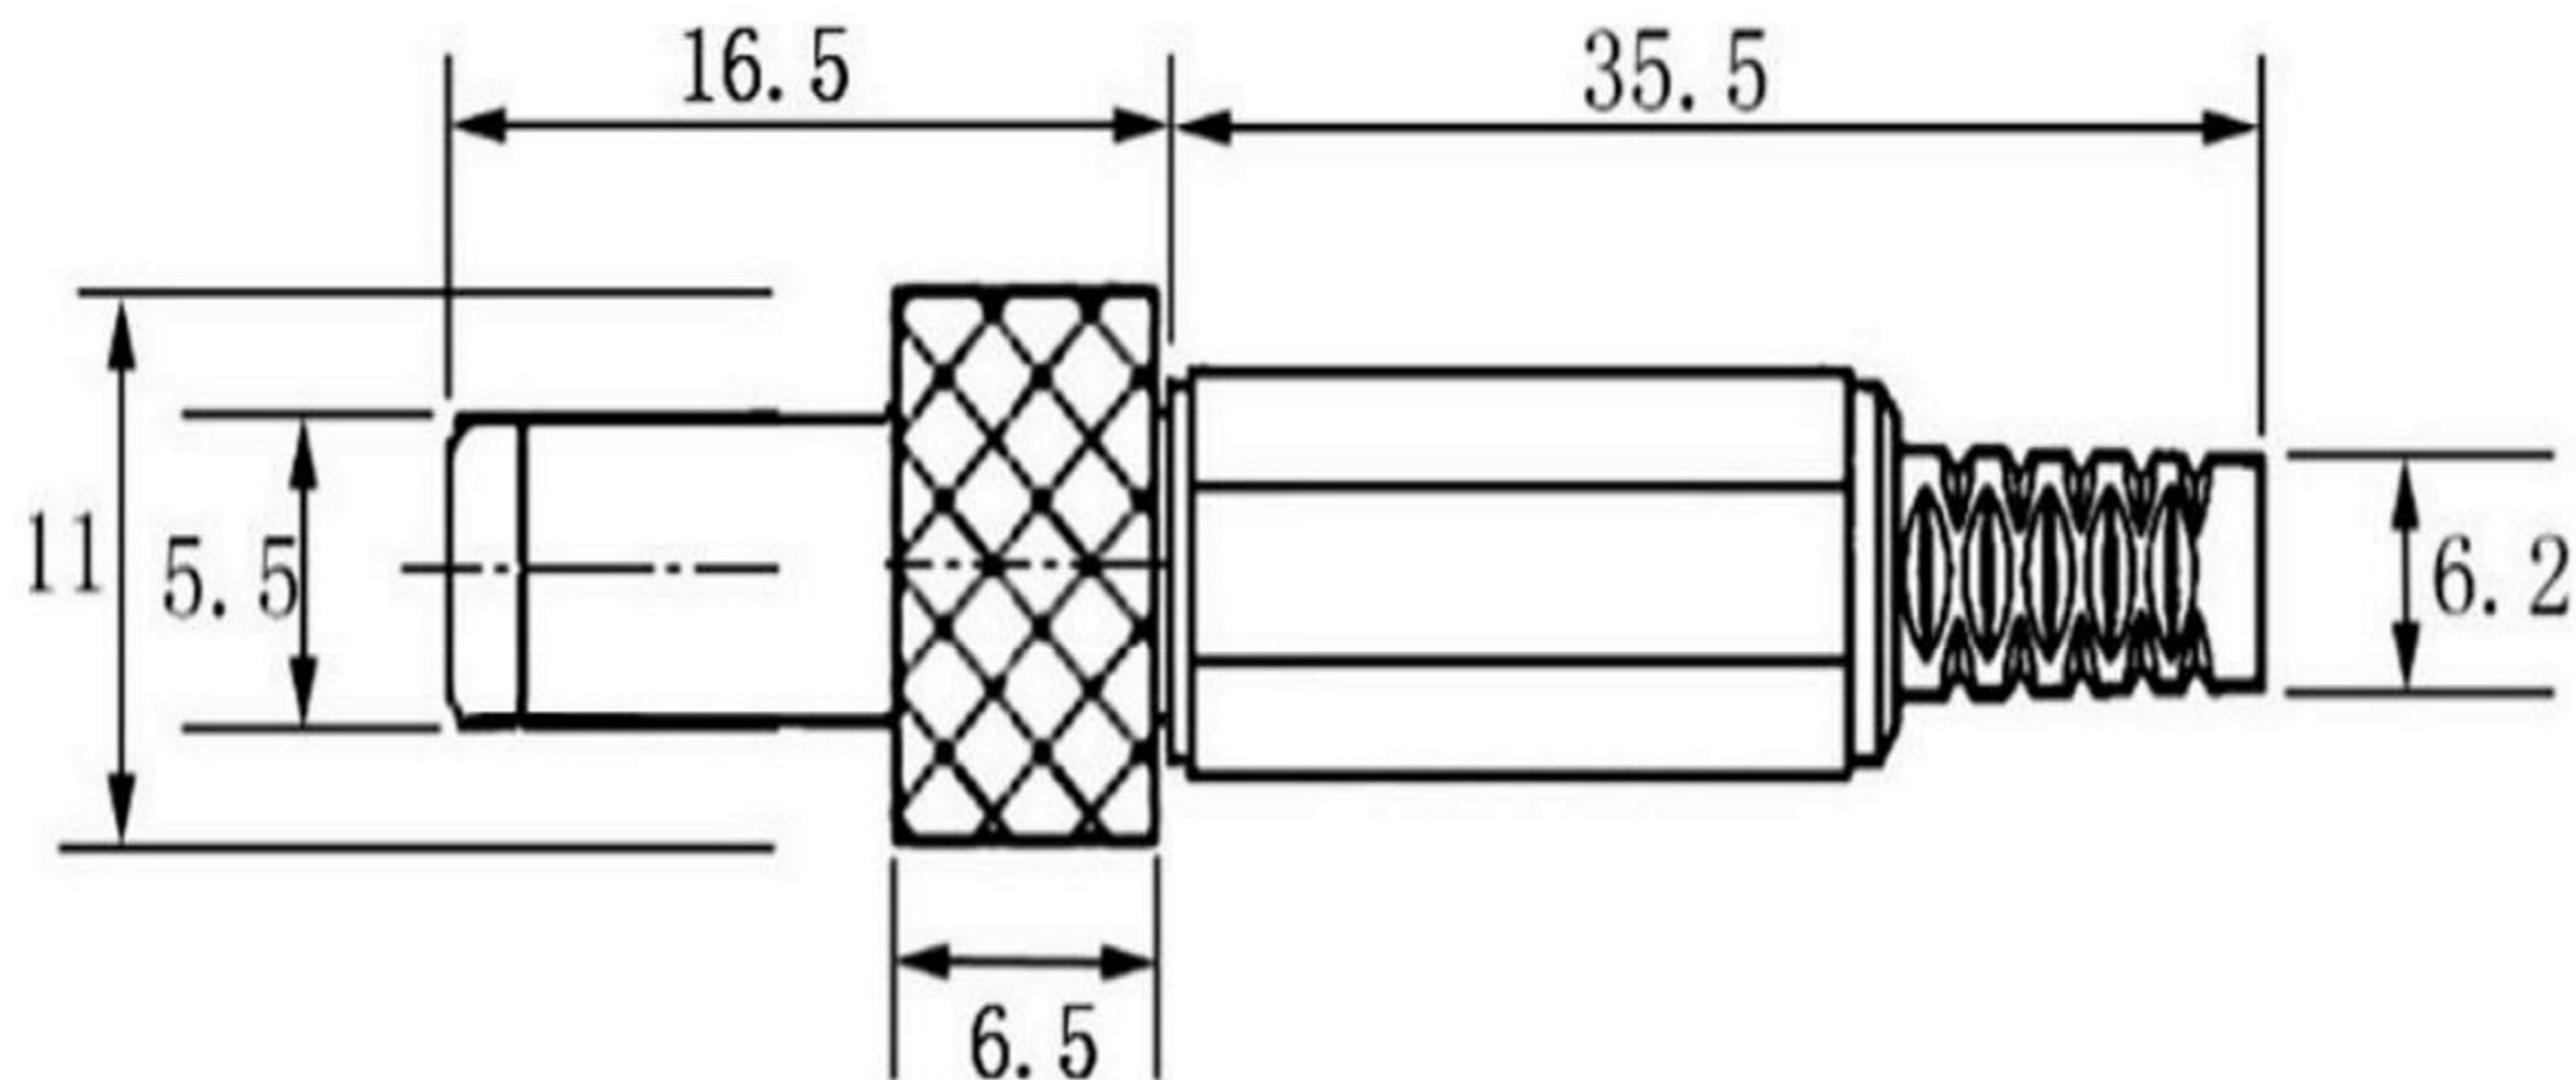

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:

- 1-1. RATING: 24V 3A
- 1-2. CONTACT RESISTANCE: 30mΩ MAX.(INITIAL)
- 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
- 1-4. INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500V DC

2. MECHANICAL CHARACTERISTICS:


- 2-1. INSERTION FORCE : 0.3~3.0 KGF
- 2-2. WITHDRAWAL FORCE : 0.3~3.0 KGF

3. LIFE TEST: 5,000 CYCLES MIN.

4. FOR REFLOW SOLDERING LEAD-FREE PROCESS.

5. ▼ REPRESENT CRITICAL DIMENSIONS.

6. ▽ CPK CONTROLLED DIMENSIONS.

③	CENTER PIN	1	BRASS Ø1.10	Au	
②	TERMINAL	1	PHOSPHOR BRONZE 0.2t	Au	
①	HOUSING	1	PAA	Black	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR	
UNLESS OTHERWISE SPECIFIED TOLERANCES		 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
DECIMALS:		ANGLES:		DWG NO. Q/XM-CP-RD-0097	PART NAME: DC POWER JACK
DIM	TOL	DIM	TOL	DESIGN:	PART NO. XB-DC-T-5521L
X.	±0.50	X.	±2°	CHECK:	REV. A
X.X	±0.30	X.X	±1°	APPROVED	UNIT: mm
X.XX	±0.20	X.XX	—		SHEET: 1/1
X.XXX	±0.10	X.XXX	—		



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.