
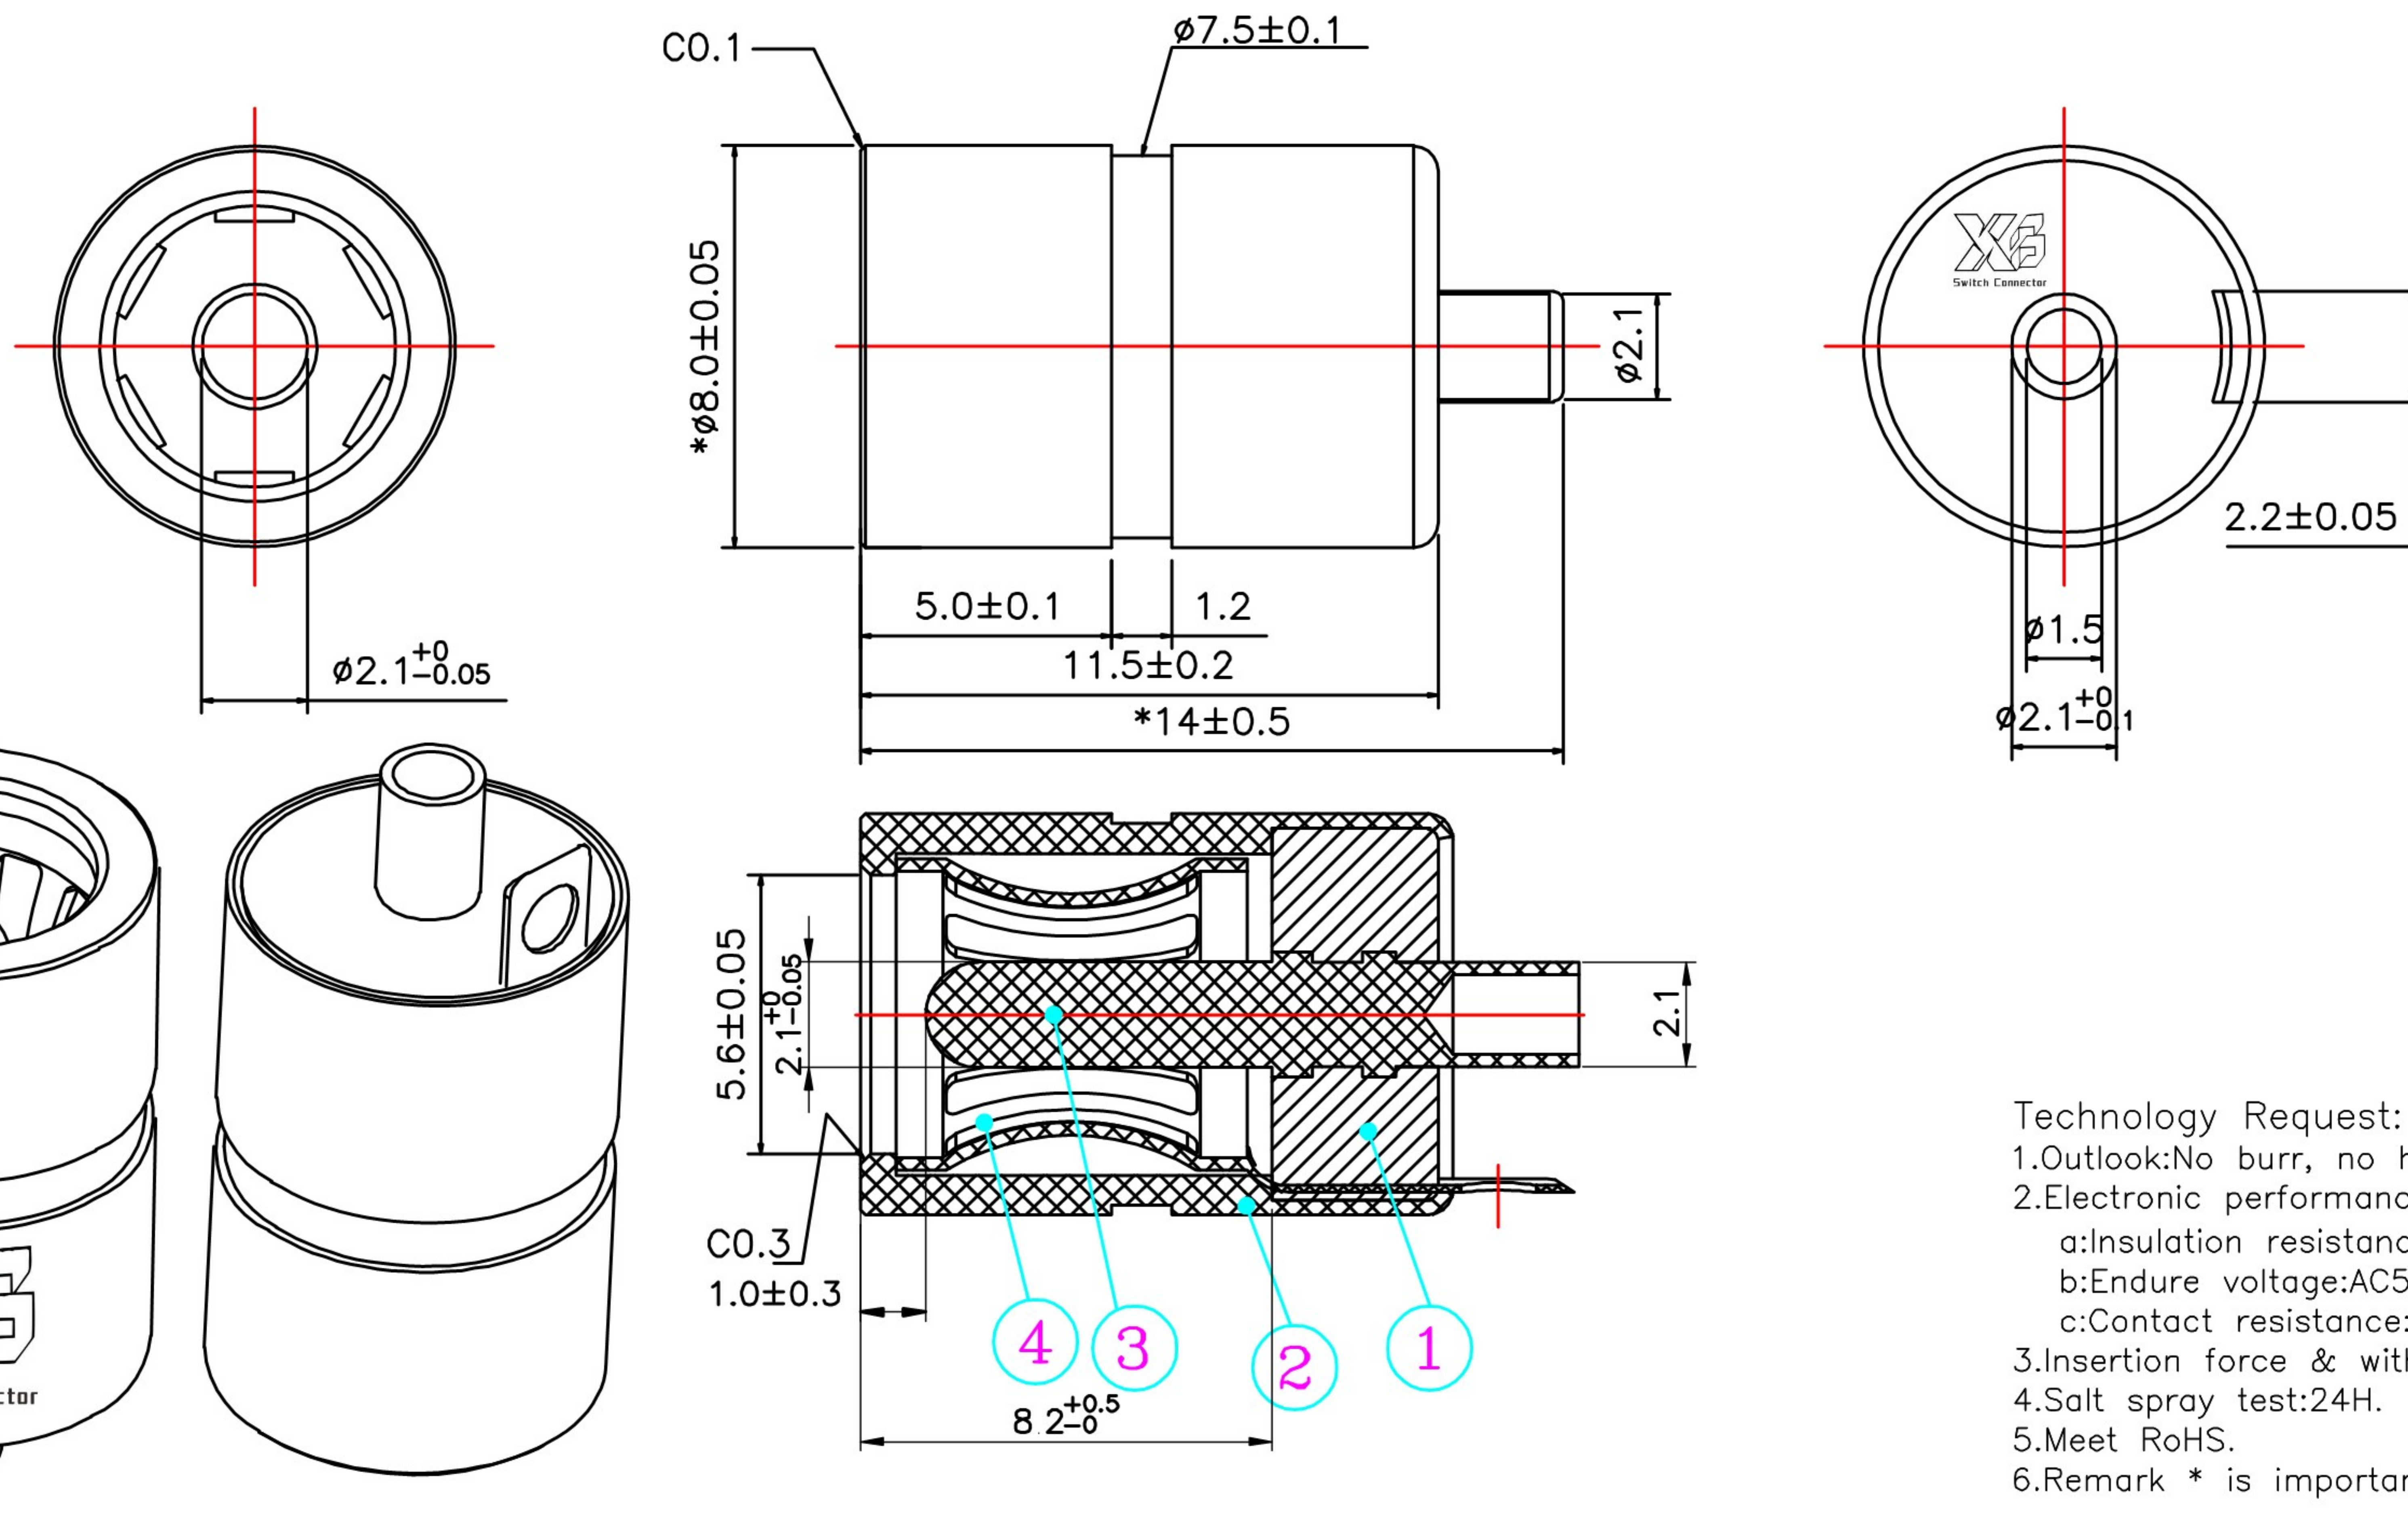


ROHS

版本 REV	修正标记 REV.LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签名 SIGN	日期 DATE
V1.0		新版制定		June	20200325



Technology Request:
1.Outlook:No burr, no hurt.
2.Electronic performance:
a:Insulation resistance: Above DC500V/100MΩ;
b:Endure voltage:AC500V at 1 minute;
c:Contact resistance:Under 30mΩ;
3.Insertion force & withdrawal force:0.3–3kgf.
4.Salt spray test:24H.
5.Meet RoHS.
6.Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance	7			核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
比例 Scale	5:1	xx.:±0.3	6							
			5			June	杨义邦	苏伟伦		
4	5521/5*6.2*0.25*13.5带尾弹面		C5191	Ni 1um—3um						
视图 Third angle projection	x.x:±0.1		3	2.1*13*2.5针	C3604					Ni 1um—3um
			2	8*11.5管	C3604				Ni 1um—3um	
	.xx:±0.05	1	PLASTIC	PBT	BLACK					
		NO.	PART	MATERIAL	PLATING					
									规格 DESCRIPTION:	DC JACK Ø5.5*Ø2.1*14
									品名 P/N:	5521JL80—140
									图号 DRAWN NO:	CP—03—0158