
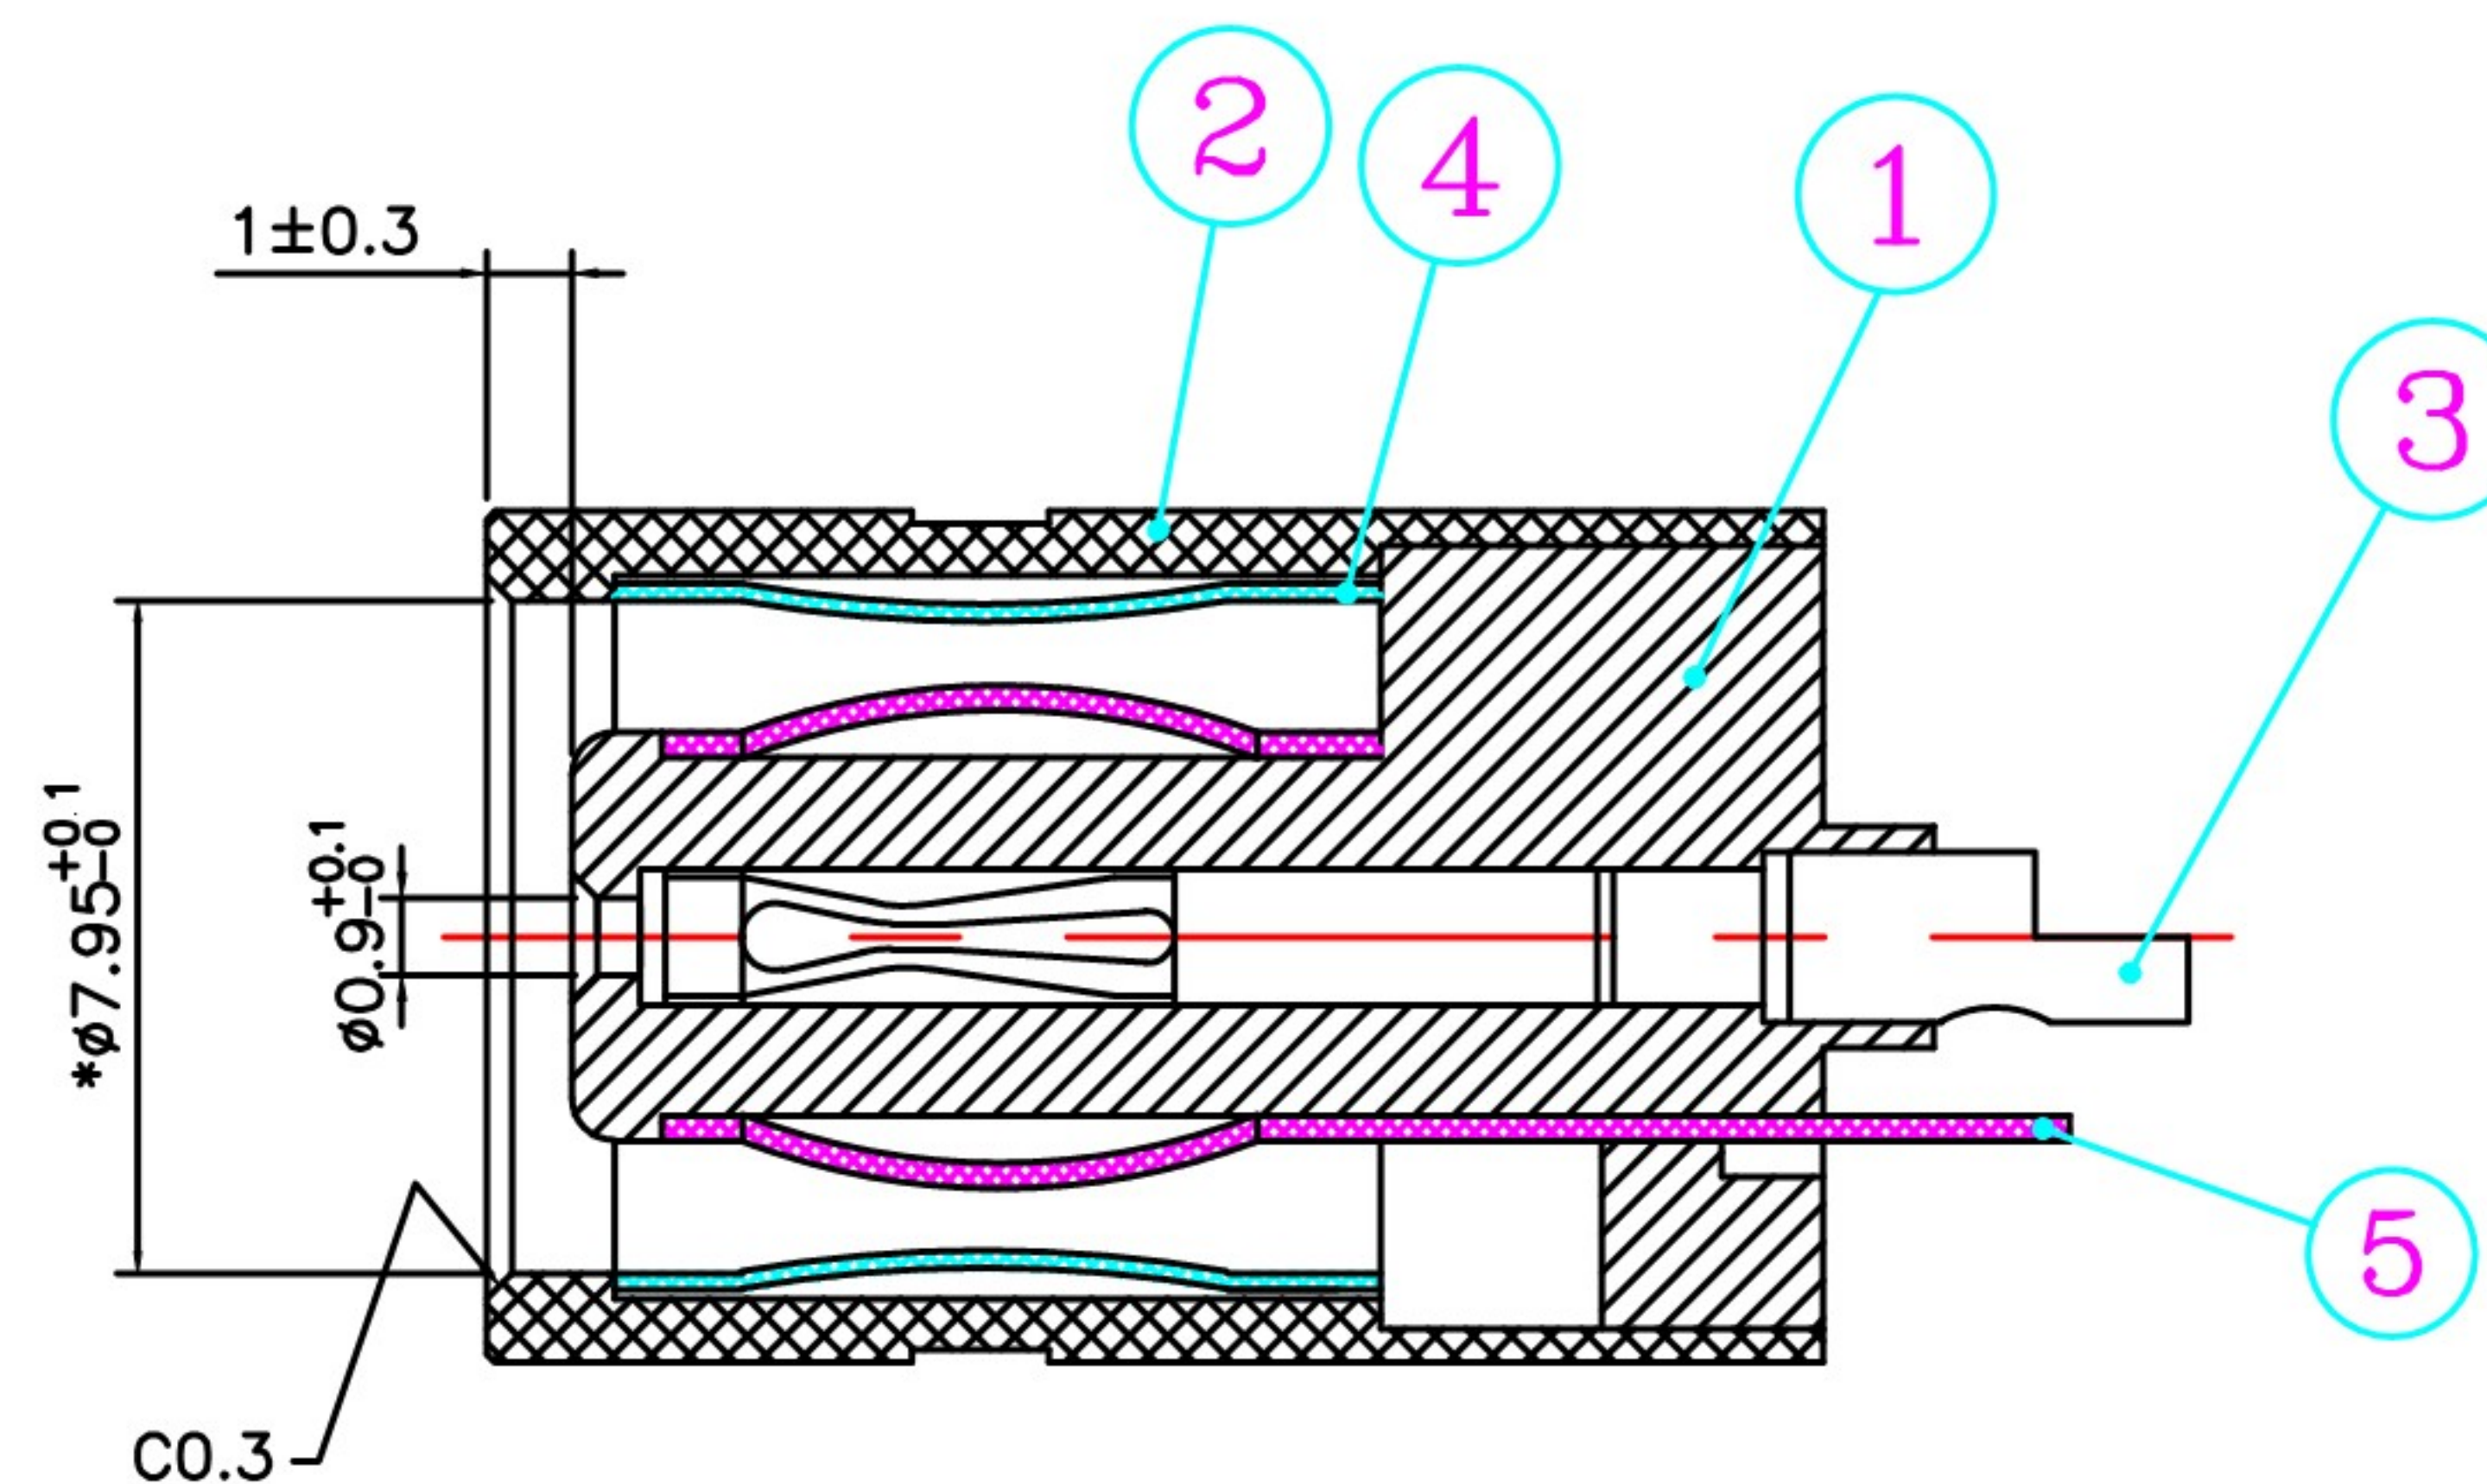
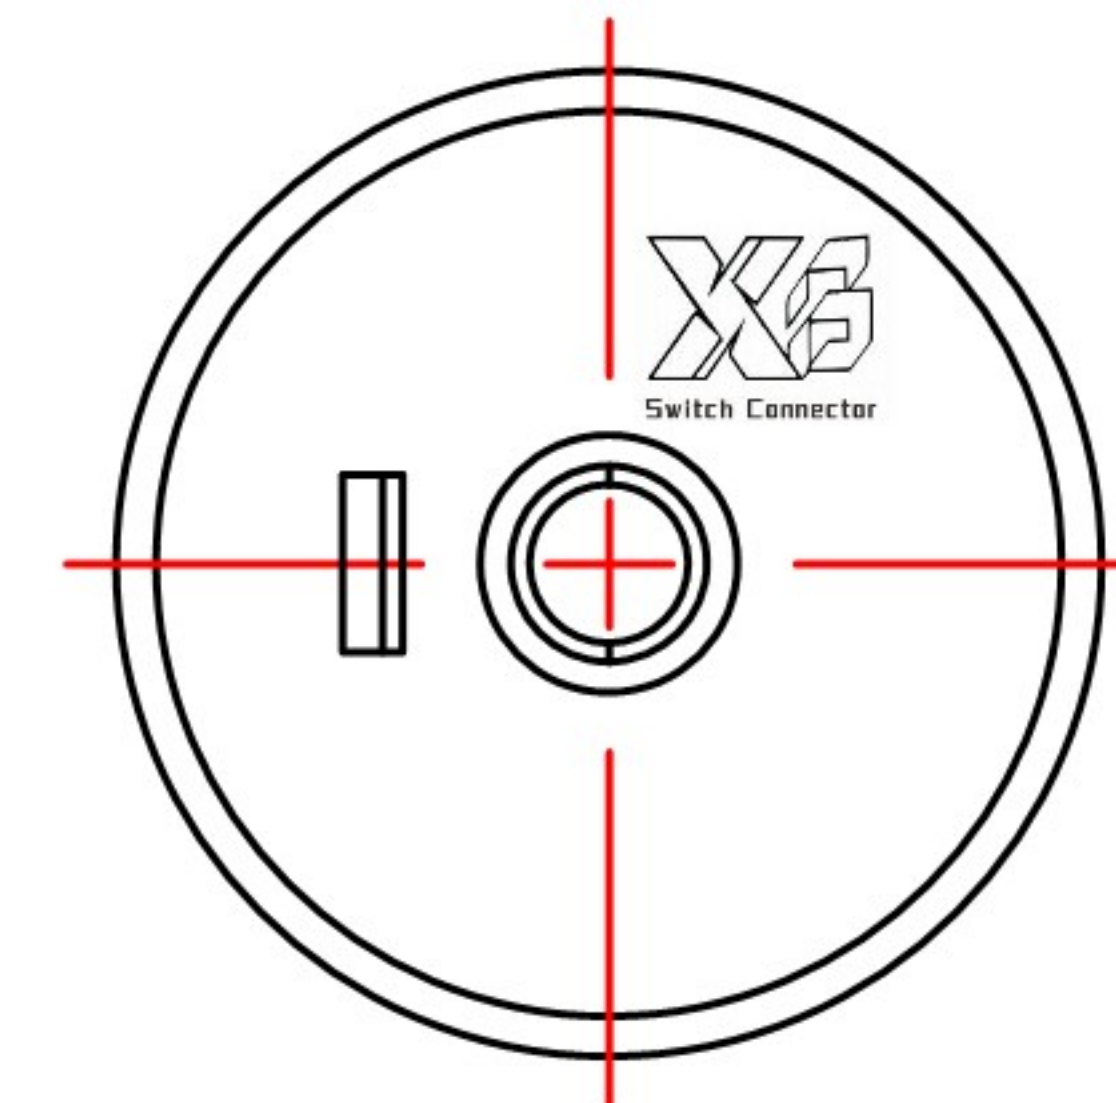
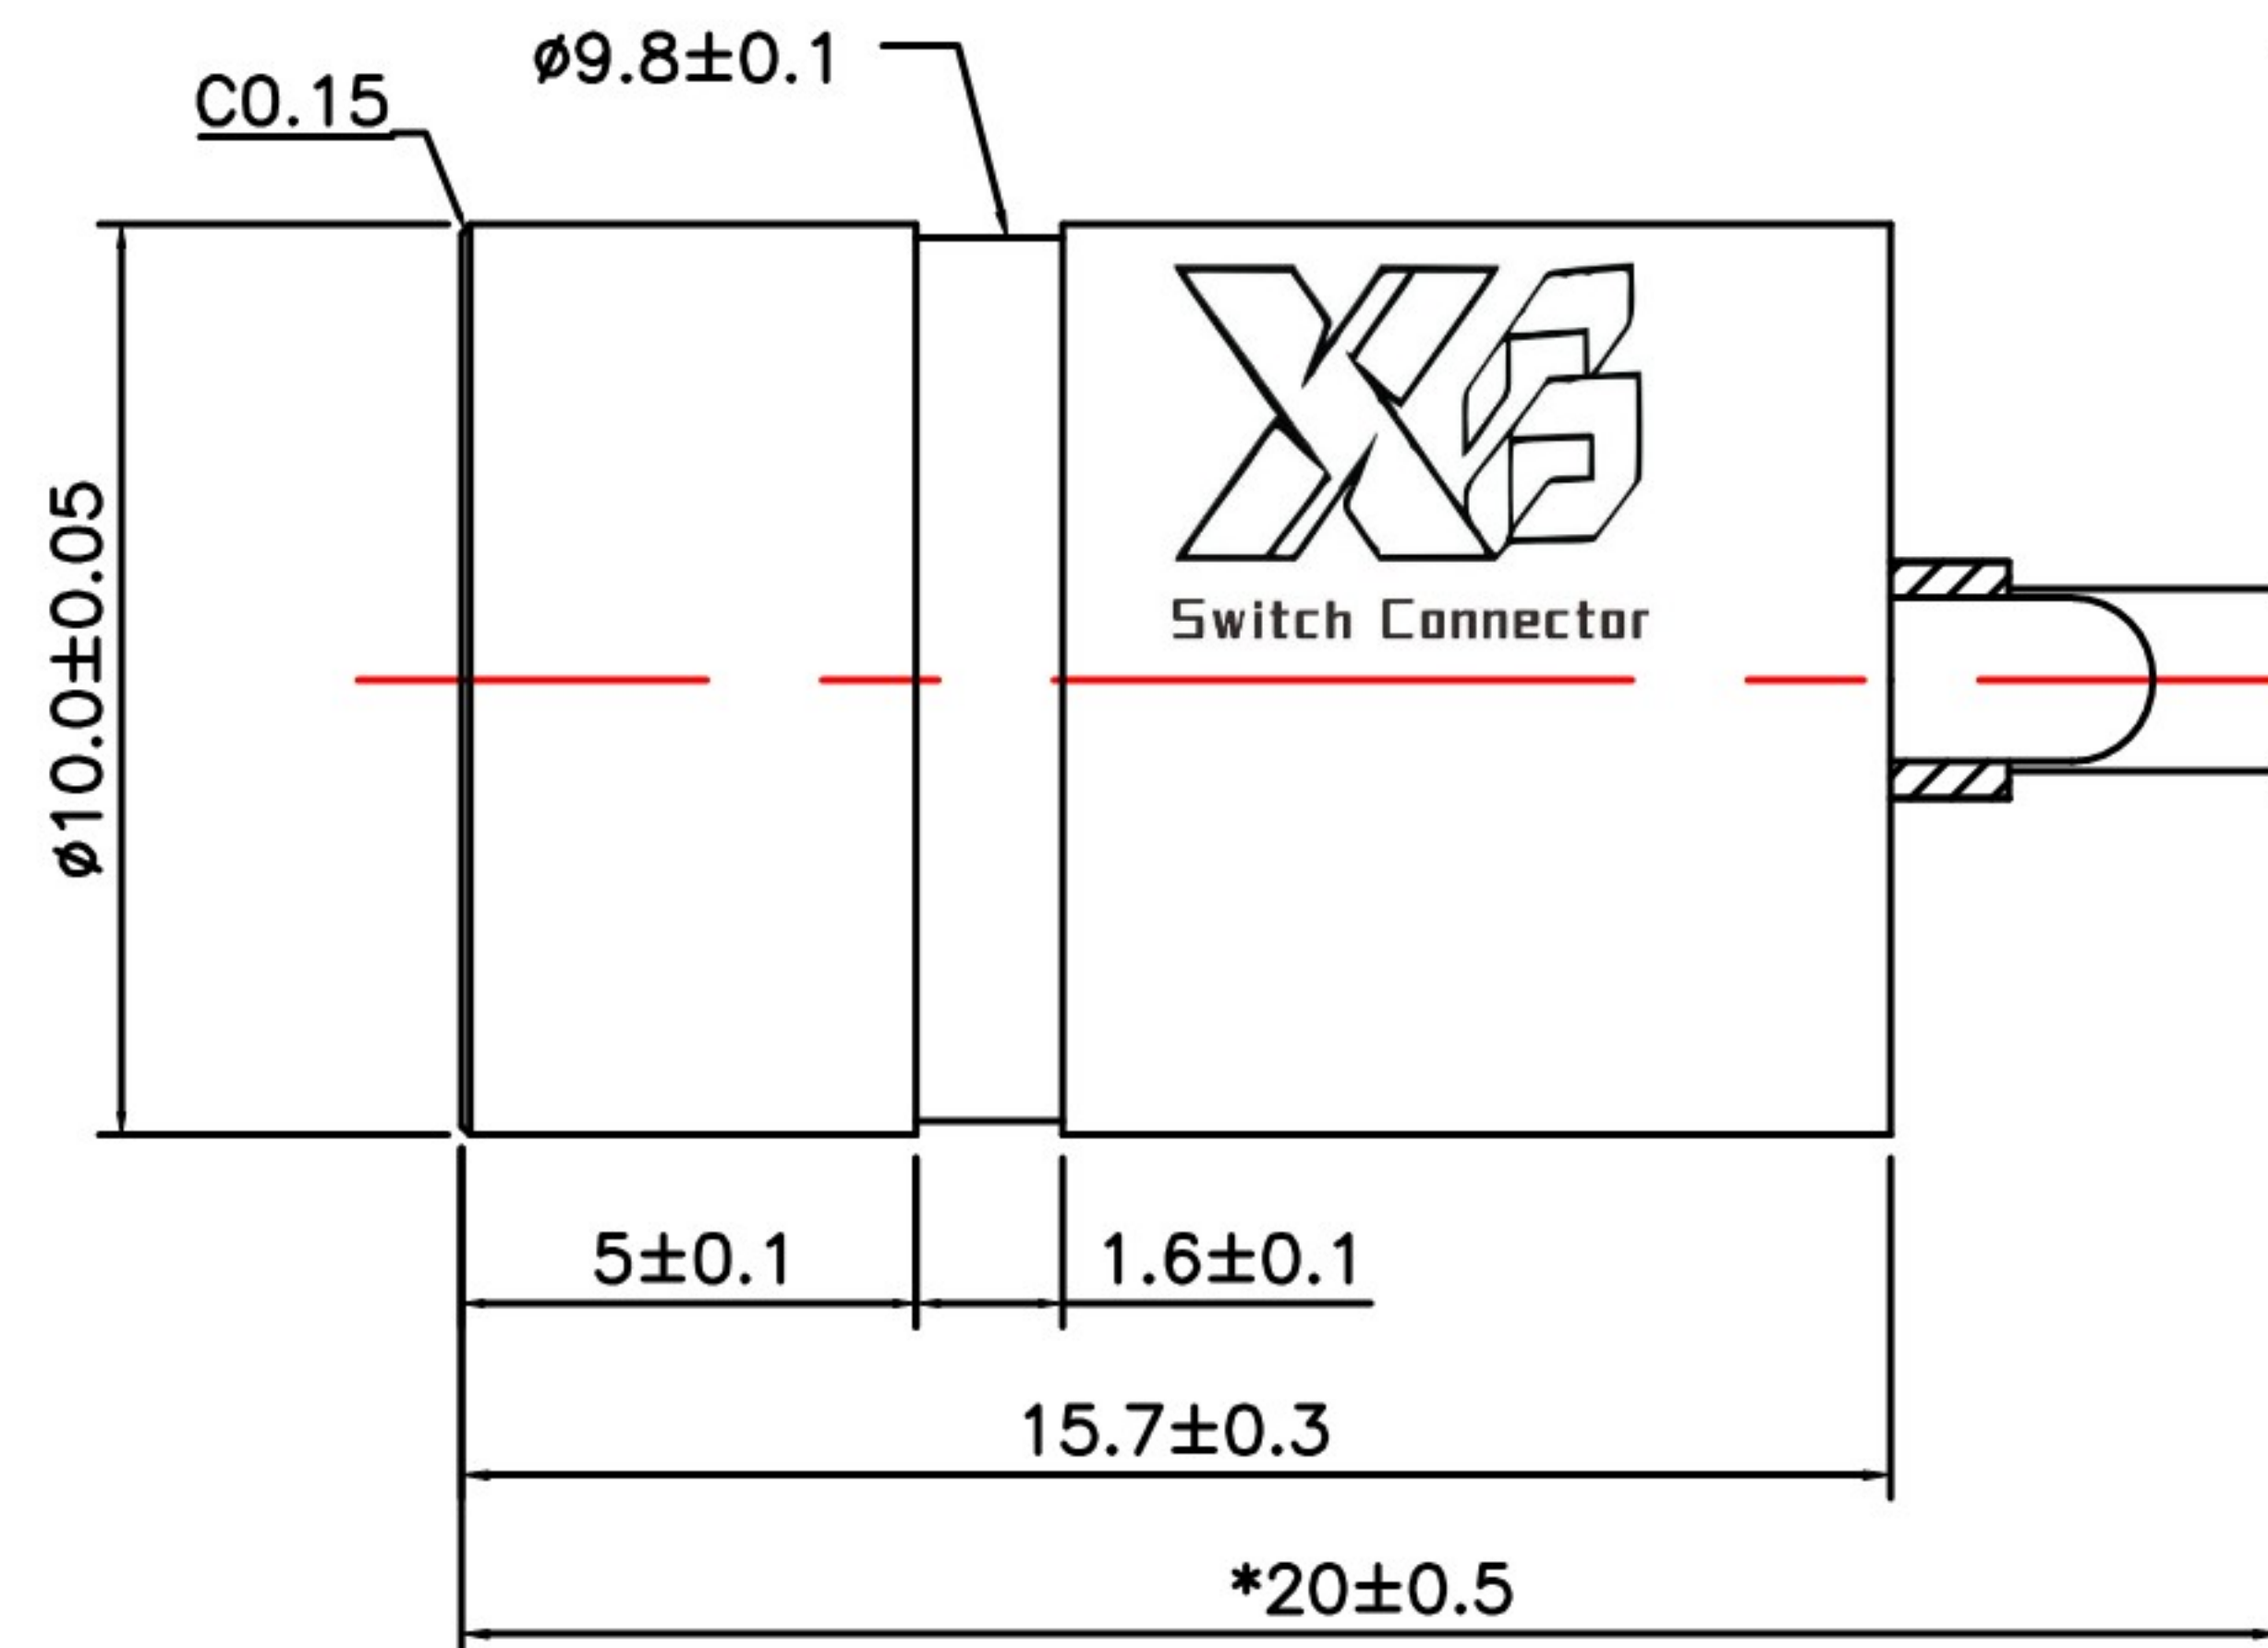


ROHS

版本 REV	修正标记 REV.LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签 名 SIGN	日 期 DATE
V1.0		新版制定		June	20180917

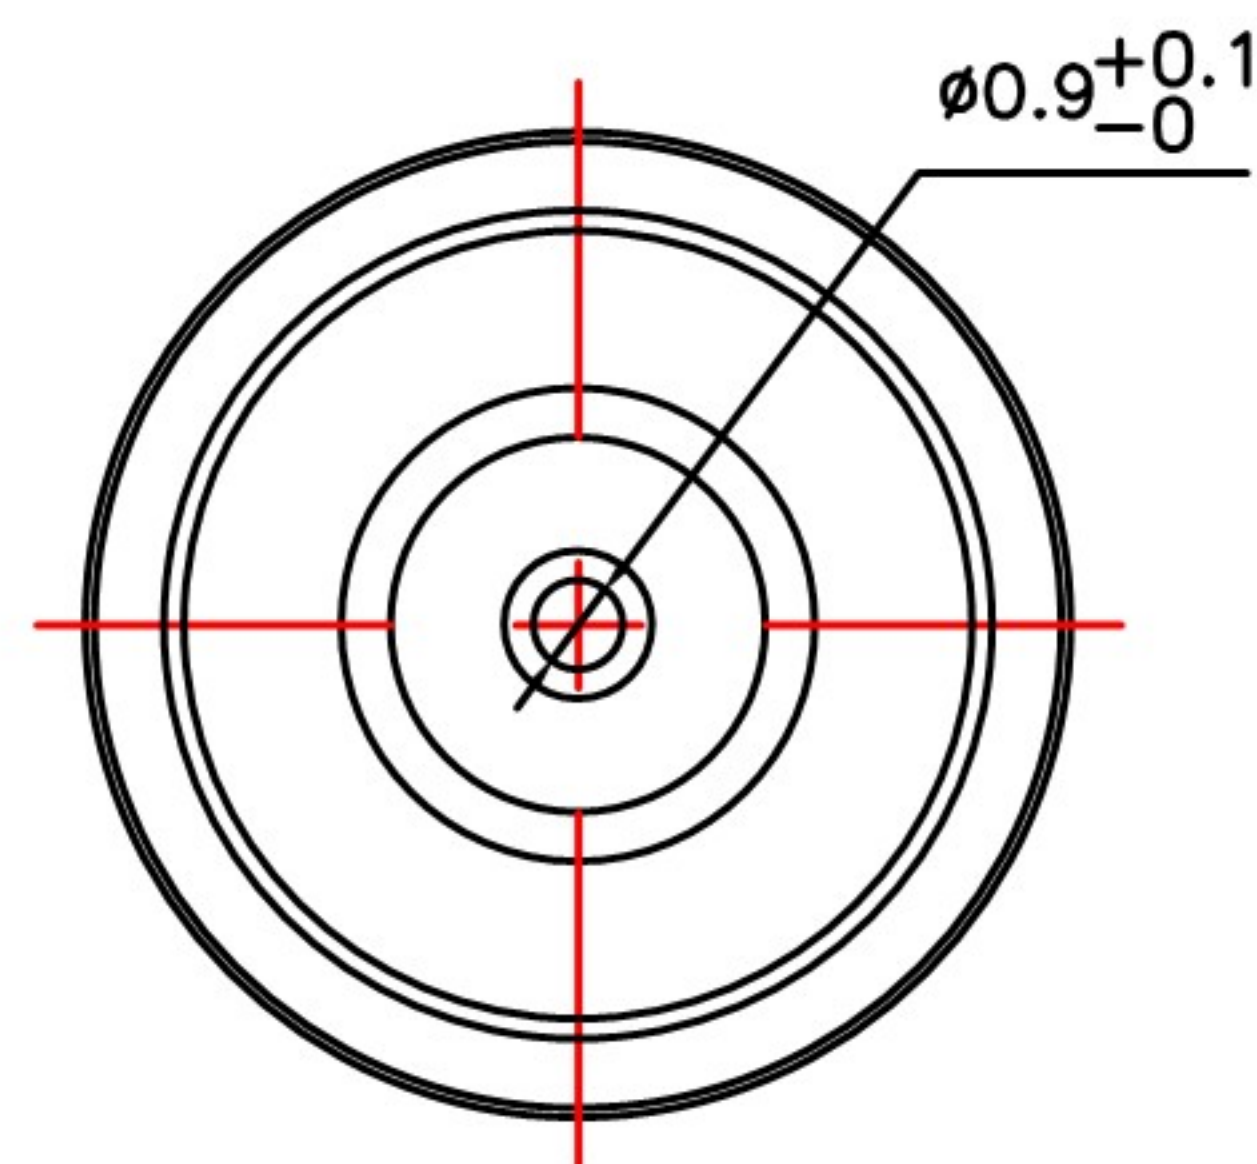

Technology Request:

- Outlook:
No burr, no hurt.
- Electronic performance:
a:Insulation resistance:
Above DC500V/100MΩ;
b:Endure voltage:
AC500V at 1 minute;
c:Contact resistance:
Under 30mΩ;
- Insertion force & withdrawal force:
0.3–3kgf.
- Salt spray test:24H.
- Meet RoHS.
- Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance	7				核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY	规格 DESCRIPTION	品名 P/N	图号 DRAWN NO
比例 Scale	5:1	xx.:±0.3	5	7406灯笼弹圈	BRONZE(C5191)	Ni 40~120μ	June	杨义邦	李莹峰			
视图 Third angle projection		x.x:±0.1	4	7406大弹圈	BRONZE(C5191)	Ni 40~120μ						
		.xx:±0.05	3	7909刺破端子 (1.4*1.8*18)	BRONZE(C5191)	Ni 40~120μ						
			2	10*15.7*8.1管	BRASS(C3604)	Ni 40~120μ						
			1	PLASTIC	PBT	BLACK						
			NO.	PART	MATERIAL	PLATING						



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

规格 DESCRIPTION	DC JACK 07.9*0.9*20
品名 P/N	79P09J10
图号 DRAWN NO	CP-08-0036