


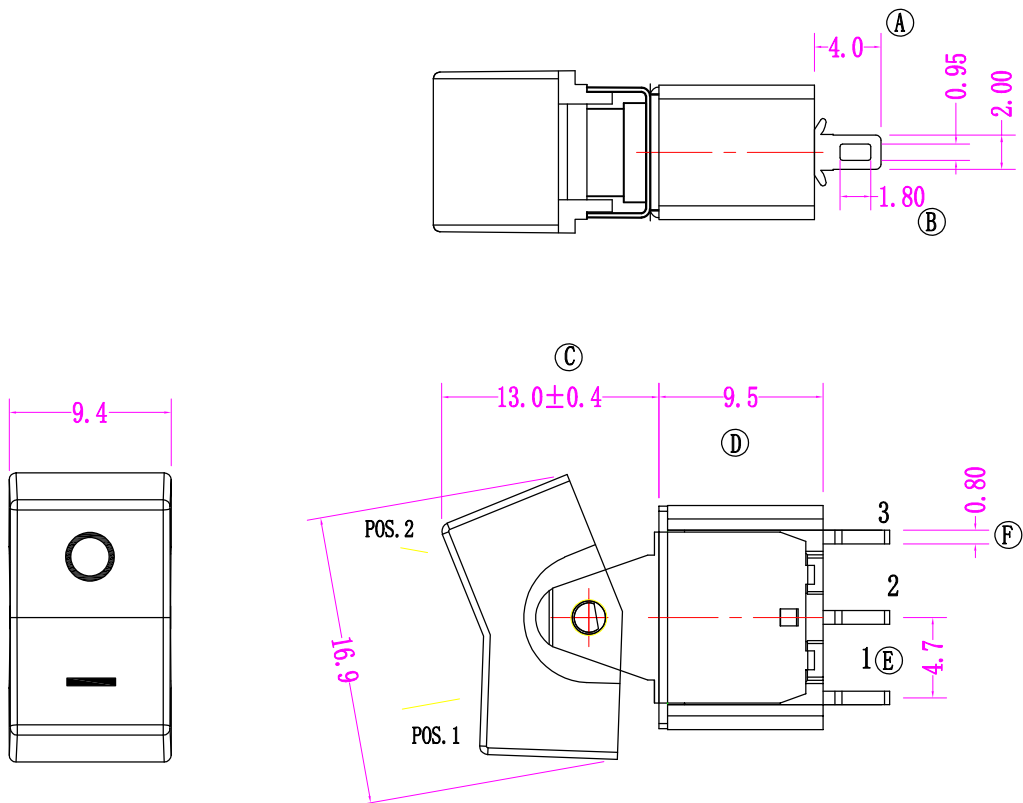

标注: ①-⑥为重点检测尺寸

Technical characteristics

SPECIFICATION: 5 A max. @ 125 VAC.

2 A max. @ 250 VAC.

MECHANICAL LIFE: 40,000 make-and-break cycles.

CONTACT RESISTANCE: 20mΩ max. initial @ 2-4VDC

100mA for both silver.

INSULATION RESISTANCE: 1000 MΩ min.

DIELECTRIC STRENGTH: 1500 VAC min.

OPERATING TEMPERATURE: -30°C to +85°C.

Materials

CASE: PPA (UL 94V-0)

CAP: PA66

HOUSING: Stainless Steel.

ACTUATOR: Alloy, nickel plated.

BUSHING: Alloy, nickel plated.

CONTACT/TERMINALS: Copper alloy silver plated.

RoHS

按钮位置及导通端子示意图

Model NO.	POS. 1	POS. 2	POS. 3
102	ON	NONE	ON
SCHEMATIC			



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

				公差 TOLERANCES	. X ± 0.4	. XX ± 0.25	角度	± 5°	UNIT 单位	mm	SCALE 1:1	
				版本 VERSION	AO	比例尺 SCALE	NONE	日期 DATE	2022. 10. 14	TITLE 图名	Miniature Rocker And Lever Switch	
				核准		核对		绘图		DWG NO. 料号		
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY	WSL	PART NO. 型号	XB-MR-0-102-A01-0300-RS	