
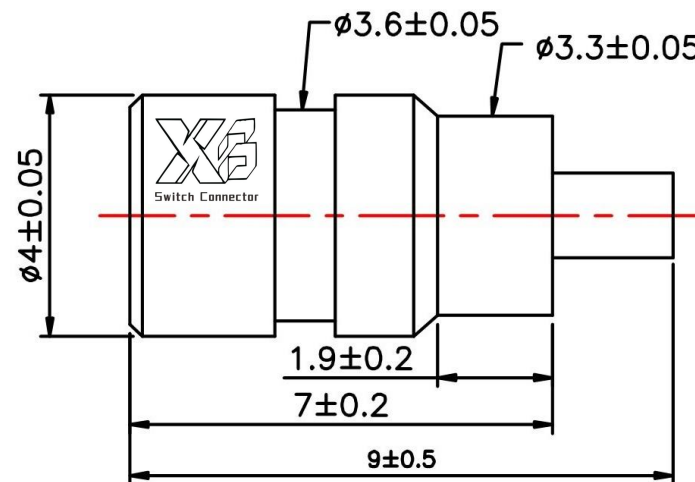

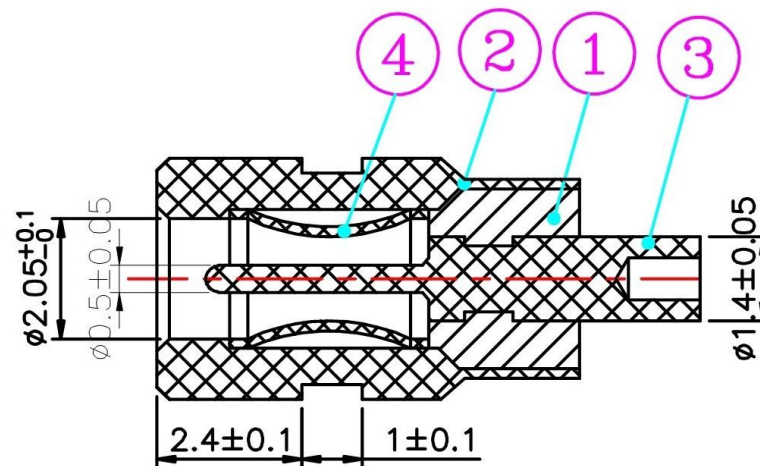


ROHS

| 版 本<br>REV | 修正标记<br>REV.LTR | 修正前<br>BEFORE REVISION | 修正后<br>AFTER REVISION | 签 名<br>SIGN | 日 期<br>DATE |
|------------|-----------------|------------------------|-----------------------|-------------|-------------|
| V1.0       |                 | 新版制定                   |                       | June        | 20180917    |
|            |                 |                        |                       |             |             |
|            |                 |                        |                       |             |             |



### Technology Request:

1.Outlook:No burr, no hurt.

2.Electronic performance:

a:Insulation resistance: Above DC500V/100MΩ;

b:Endure voltage:AC500V at 1 minute;

c:Contact resistance:Under 30mΩ;

3.Insertion force & withdrawal force:0.3–3kgf.

4.Salt spray test:24H.

5.Meet RoHS.

6.Remark \* is important specification.

| 单位<br>Unit                   | mm  | 一般公差<br>The general tolerance | 7   |         |          |          |
|------------------------------|-----|-------------------------------|-----|---------|----------|----------|
| 比例<br>Scale                  | 5:1 | xx.:±0.3                      | 6   |         |          |          |
| 视图<br>Third angle projection |     | x.x:±0.1                      | 5   |         |          |          |
|                              |     | .xx:±0.05                     | 4   | 加力铜圈    | C5191    | Ni 2-3um |
|                              |     |                               | 3   | 中心针     | C3604    | Ni 2-3um |
|                              |     |                               | 2   | 4X7.0   | C3604    | Ni 2-3um |
|                              |     |                               | 1   | PLASTIC | PA66     | BLACK    |
|                              |     |                               | NO. | PART    | MATERIAL | PLATING  |

| 核准<br>APPROVED BY | 校对<br>CHECKED BY | 制图<br>DRAWN BY |
|-------------------|------------------|----------------|
| June              | 杨义邦              | 李莹峰            |

**XB** 东莞市溪榜电子有限公司  
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD.

|                 |                                               |
|-----------------|-----------------------------------------------|
| 规格 DESCRIPTION: | DC JACK $\phi 2.0 \times \phi 0.6 \times 9.0$ |
| 品名 P/N:         | XB-2006J40                                    |
| 图号 DRAWN NO:    |                                               |