


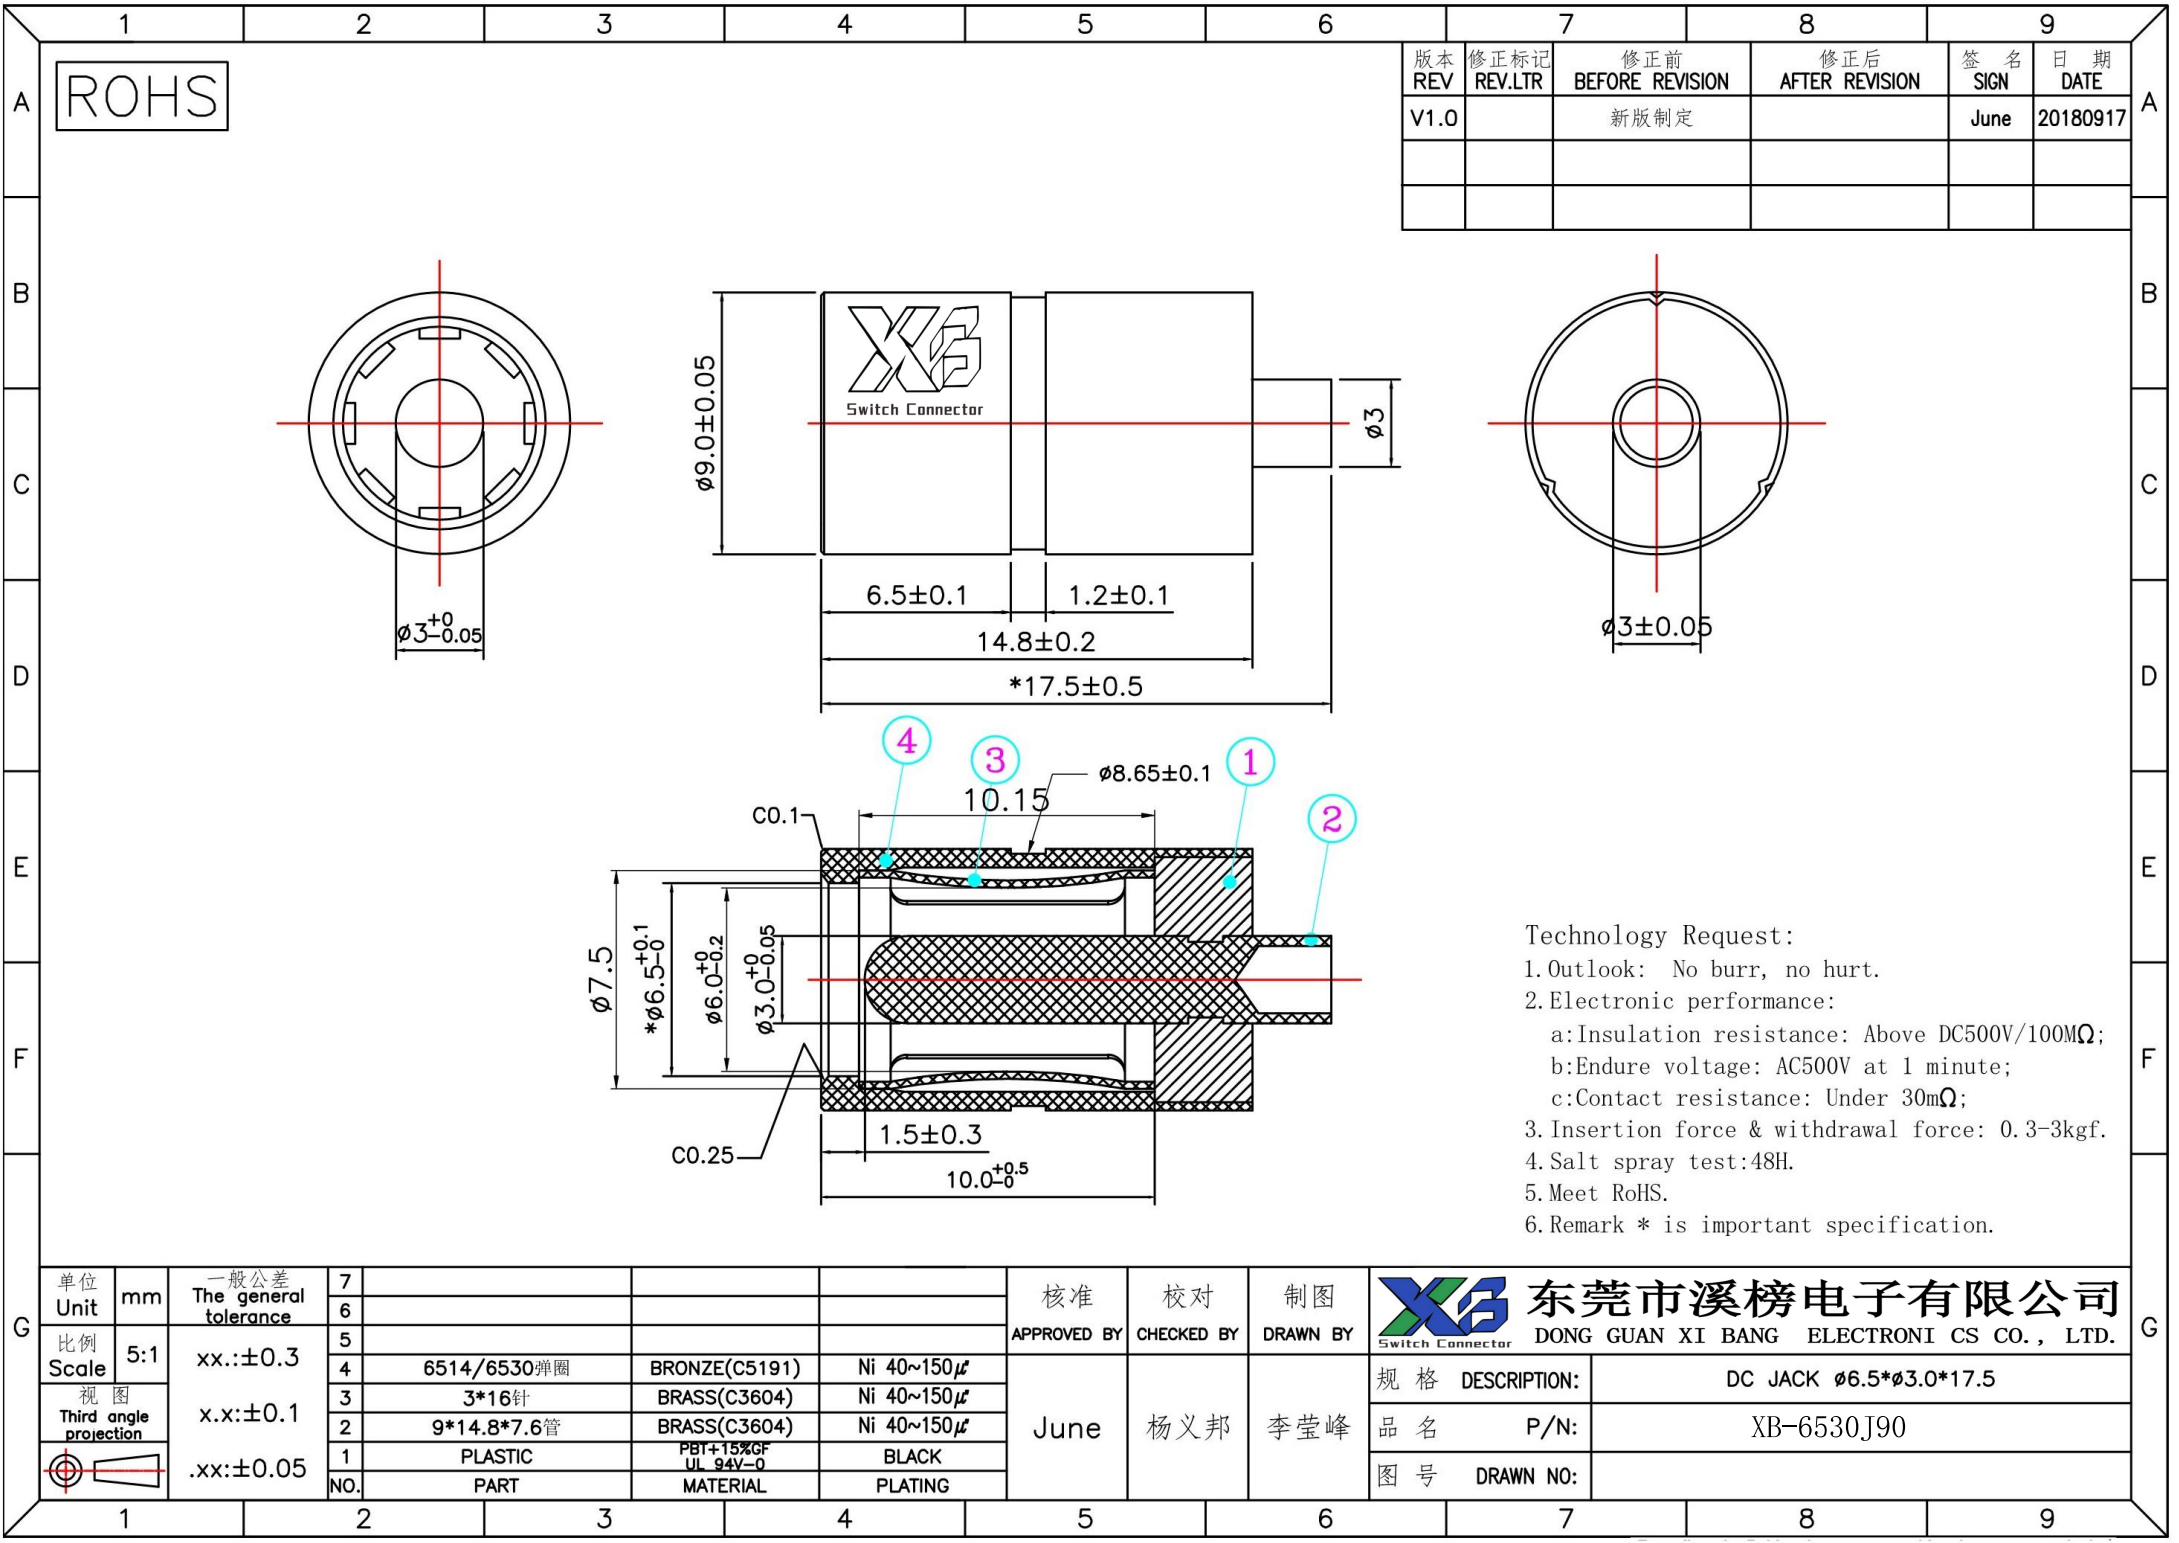


ROHS

版本 REV	修正标记 REV.LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签 名 SIGN	日 期 DATE
V1.0		新版制定		June	20180917

Technology Request:

- 1.Outlook: No burr, no hurt.
- 2.Electronic performance:
 - a:Insulation resistance: Above DC500V/100M Ω ;
 - b:Endure voltage: AC500V at 1 minute;
 - c:Contact resistance: Under 30m Ω ;
- 3.Insertion force & withdrawal force: 0.3-3kgf.
- 4.Salt spray test:48H.
- 5.Meet RoHS.
- 6.Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance	7				核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
比例 Scale	5:1	xx.:±0.3	6								
视图 Third angle projection		x.x:±0.1	5			June	杨义邦	李莹峰	规格 DESCRIPTION:	DC JACK Ø6.5*Ø3.0*17.5	
			4	6514/6530弹圈	BRONZE(C5191)				Ni 40~150µ	品 名 P/N:	XB-6530J90
			3	3*16针	BRASS(C3604)				Ni 40~150µ	图 号 DRAWN NO:	
			2	9*14.8*7.6管	BRASS(C3604)				Ni 40~150µ		
		.xx:±0.05	1	PLASTIC	PBT+15%GF UL 94V-0	BLACK					
			NO.	PART	MATERIAL	PLATING					