

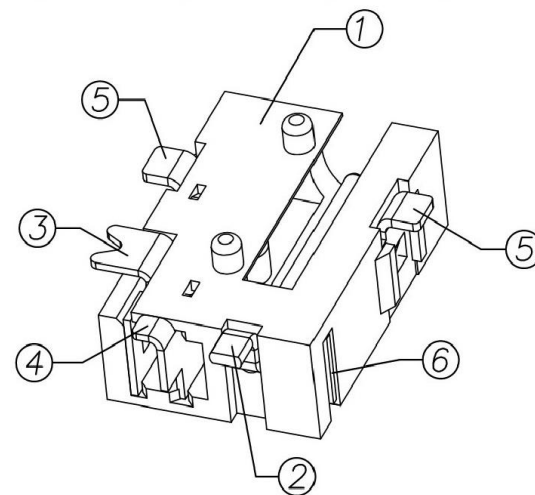
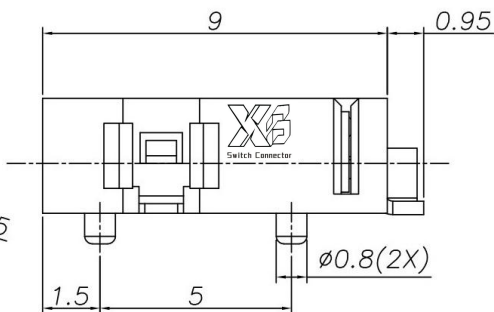
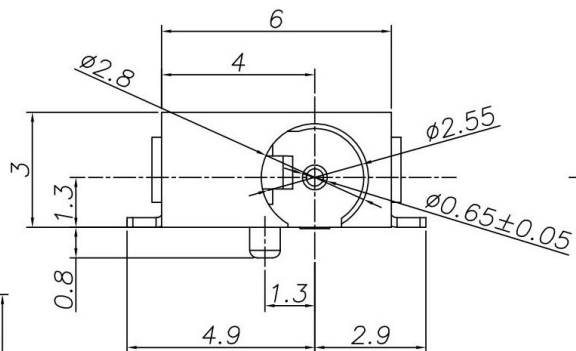


ROHS

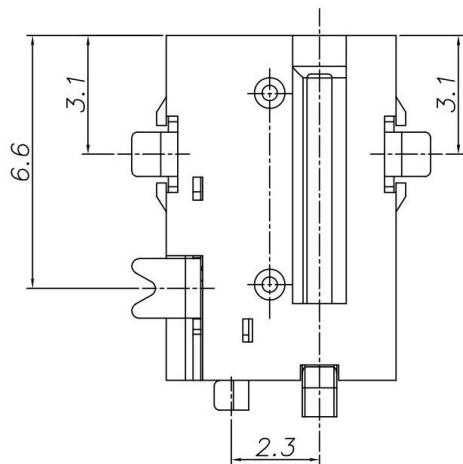

Specification:

1. Rating : DC 12V 1A;
2. Contact resistance: $\leq 30\text{m}\Omega$;
After test: $\leq 50\text{m}\Omega$
3. Insulation resistance: $\geq 100\text{M}\Omega$ (500VDC);
After test: $\geq 50\text{M}\Omega$
4. Withstanding voltage: 500VAC ;
5. Insertion and extraction force: 3N~30N;
6. Life test: 5000 cycles min;
7. Operation temperature range: $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$
8. Preservative temperature range: $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$

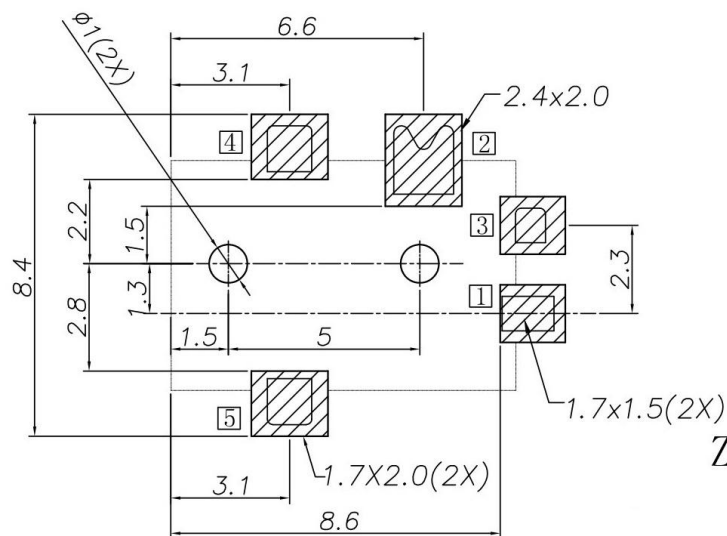

RECOMMENDED P. C. B. LAYOUT
UNSPECIFIED TOLERANCE: ± 0.05
(TOP VIEW)

Ordering information:

DC00560-☐ A ☐ ☐ 0A S ☐ 1
(1) (2) (3) (4) (5) (6) (7) (8)

- (1): Series No.
(2): Schematic option: A, B
(3): Center pin diameter:
A= $\varnothing 0.65$
(4): Material of housing:
9T=PA9T, 10=PA10T $\triangle$
(5): Housing color:
0A=Black (Standard)
(6): Terminal plating
S=Silver (Ag)
(7): Special option:
0=No special option
H=Halogen Free material $\triangle$
(8): Packing mode:
1=Tape Reel packing

单位 Unit	mm	一般公差 The general tolerance	7	6	5	4	3	2	1	NO.
比例 Scale	5:1	xx.: ± 0.3								
视图 Third angle projection		x.x: ± 0.1								
		.xx: ± 0.05								

核准
APPROVED BY校对
CHECKED BY制图
DRAWN BY东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

规格	DESCRIPTION:	DC JACK
品名	P/N:	XB-DC-0056
图号	DRAWN NO:	