


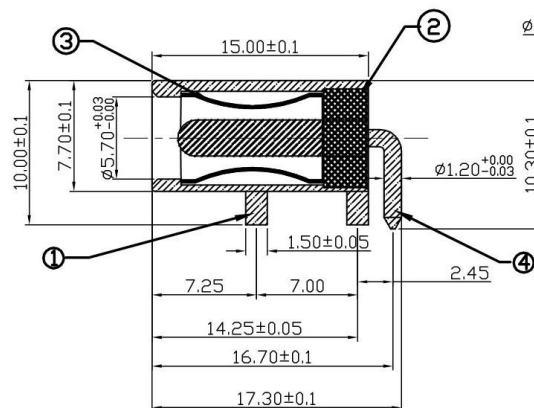


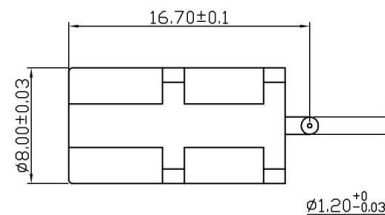


ROHS

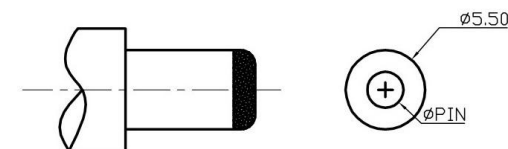


P.C.B

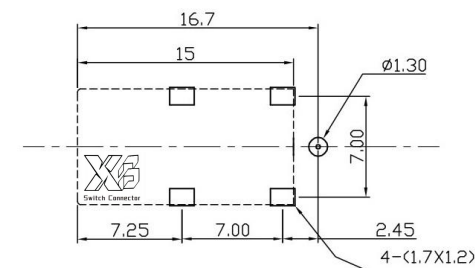

SPECIFICATION

- 1.Rating : DC 30V 8A;
- 2.Contact resistance: $\leq 30\text{m}\Omega$;
- 3.Insulation resistance: $\geq 100\text{M}\Omega$ (DC250V);
- 4.Withstand voltage: 500VAC ;
- 5.Insertion and extraction force: 3-30N;
- 6.life test: 5,000 cycles.

PIN	$\phi 2.0$	$\phi 2.5$
APPD		



单位 Unit	mm	一般公差 The general tolerance	7				核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY
比例 Scale	5:1	xx.:±0.3	6						
视图 Third angle projection		x.x:±0.1	5						
		.xx:±0.05	4	加力铜圈	C5191	Ni 2-3um			
			3	中心针	C3604	Ni 2-3um			
			2	4X7.0	C3604	Ni 2-3um			
			1	PLASTIC	PA66	BLACK			
			NO.	PART	MATERIAL	PLATING			

June	杨义邦	李莹峰
------	-----	-----



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

规格	DESCRIPTION:	DC JACK
品名	P/N:	XB-DC-084B
图号	DRAWN NO:	