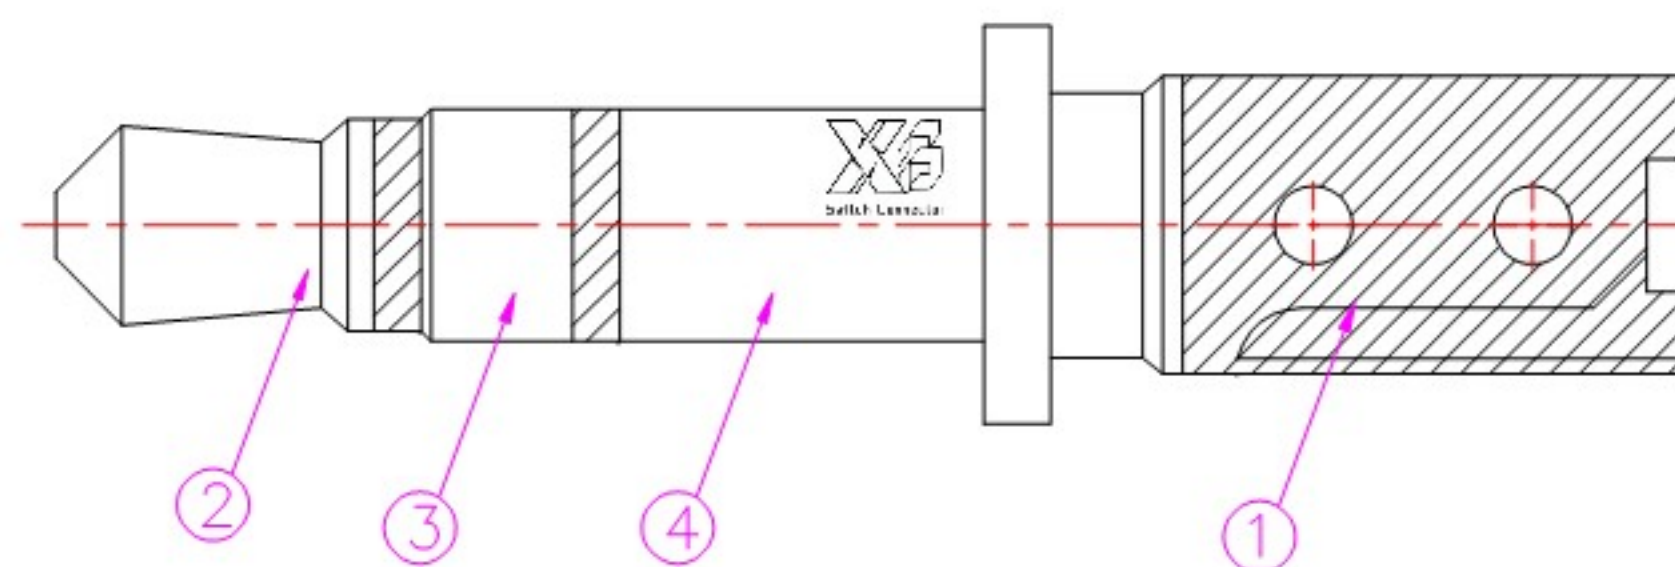
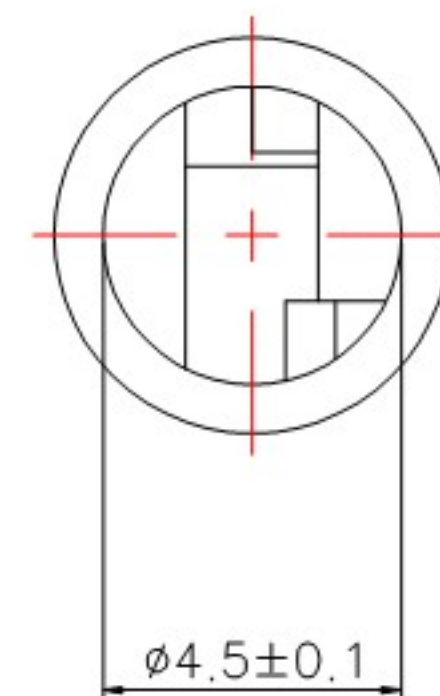
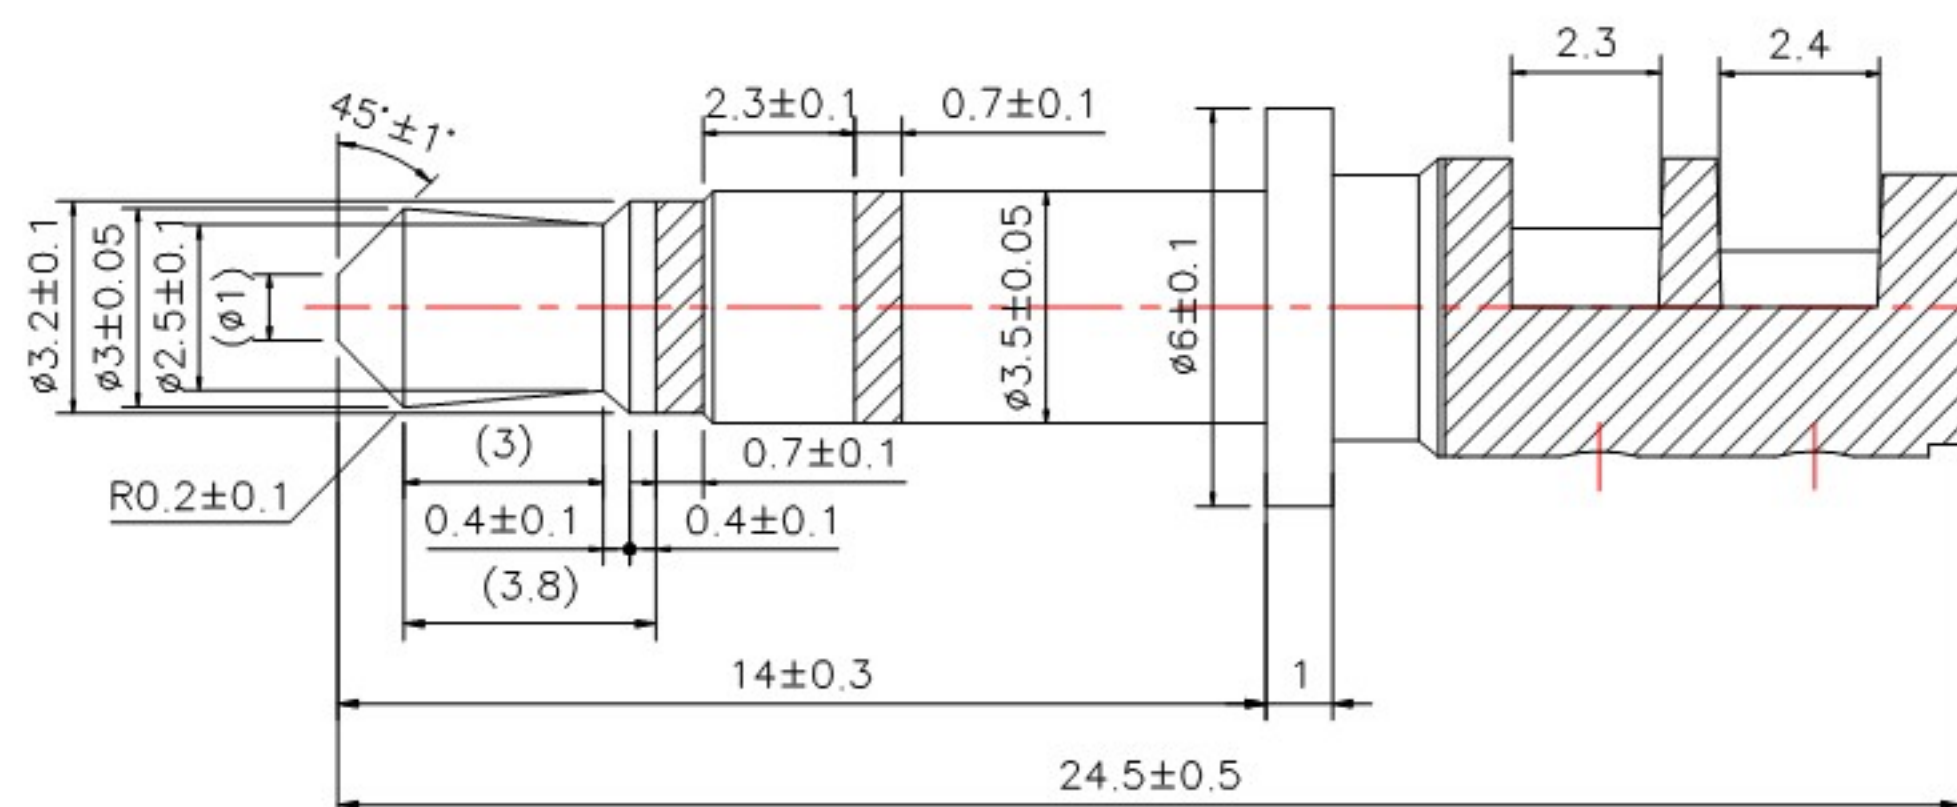
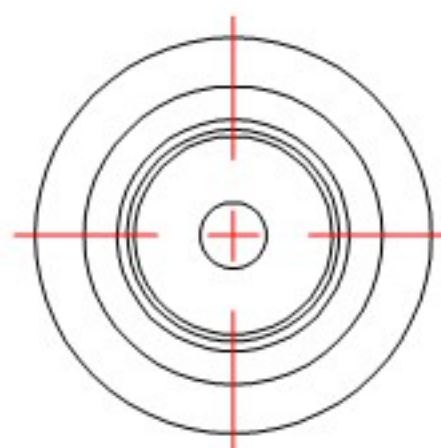


ROHS

版本 REV	修正标记 REV.LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签名 SIGN	日期 DATE
V1.0		新板制定		June	20180818

**Technology Request:**

- 1.Outlook:No burr, no hurt.
- 2.Electronic performance:
 - a:Insulation resistance:
Above DC500V/100MΩ;
 - b:Endure voltage:
AC500V at 1 minute;
 - c:Contact resistance:Under 30mΩ;
- 3.Insertion force & withdrawal force:
0.3-3kgf.
- 4.Salt spray test:24H.
- 5.Meet RoHS.
- 6.Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance	7		
比例 Scale	5:1	xx.:±0.3	6		
视图 Third angle projection		x.x.:±0.1	5		
		.xx.:±0.05	4	6.0*8.5双盖	C3604
			3	二段拉伸管	C2680
			2	R头	C3604
			1	PLASTIC	POM
			NO.	PART	MATERIAL

核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY
June	杨义邦	李莹峰

东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
规格 DESCRIPTION:	AUDIO PLUG 3.5*6.0*24.5
品名 P/N:	P35360245
图号 DRAWN NO:	CP-05-0064