
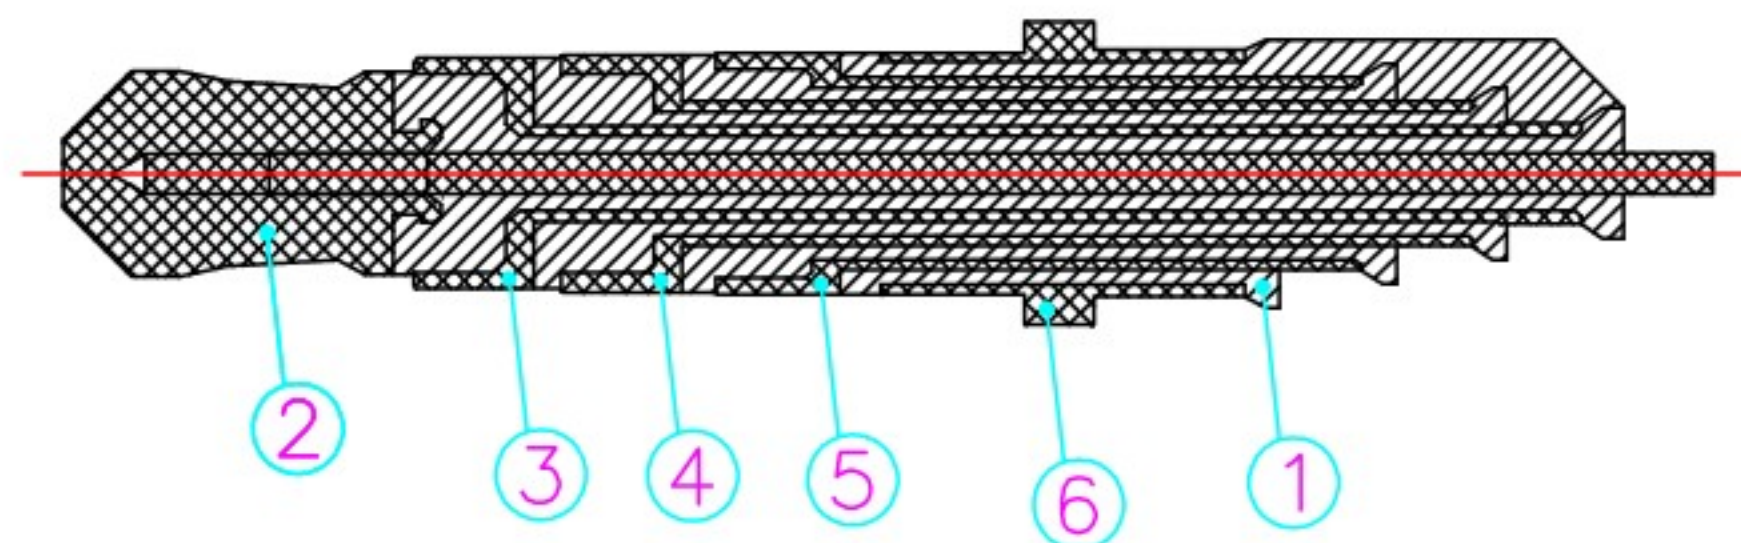


ROHS

版本 REV	修正标记 REV.LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签名 SIGN	日期 DATE
V1.0		新版制定		June	20181115

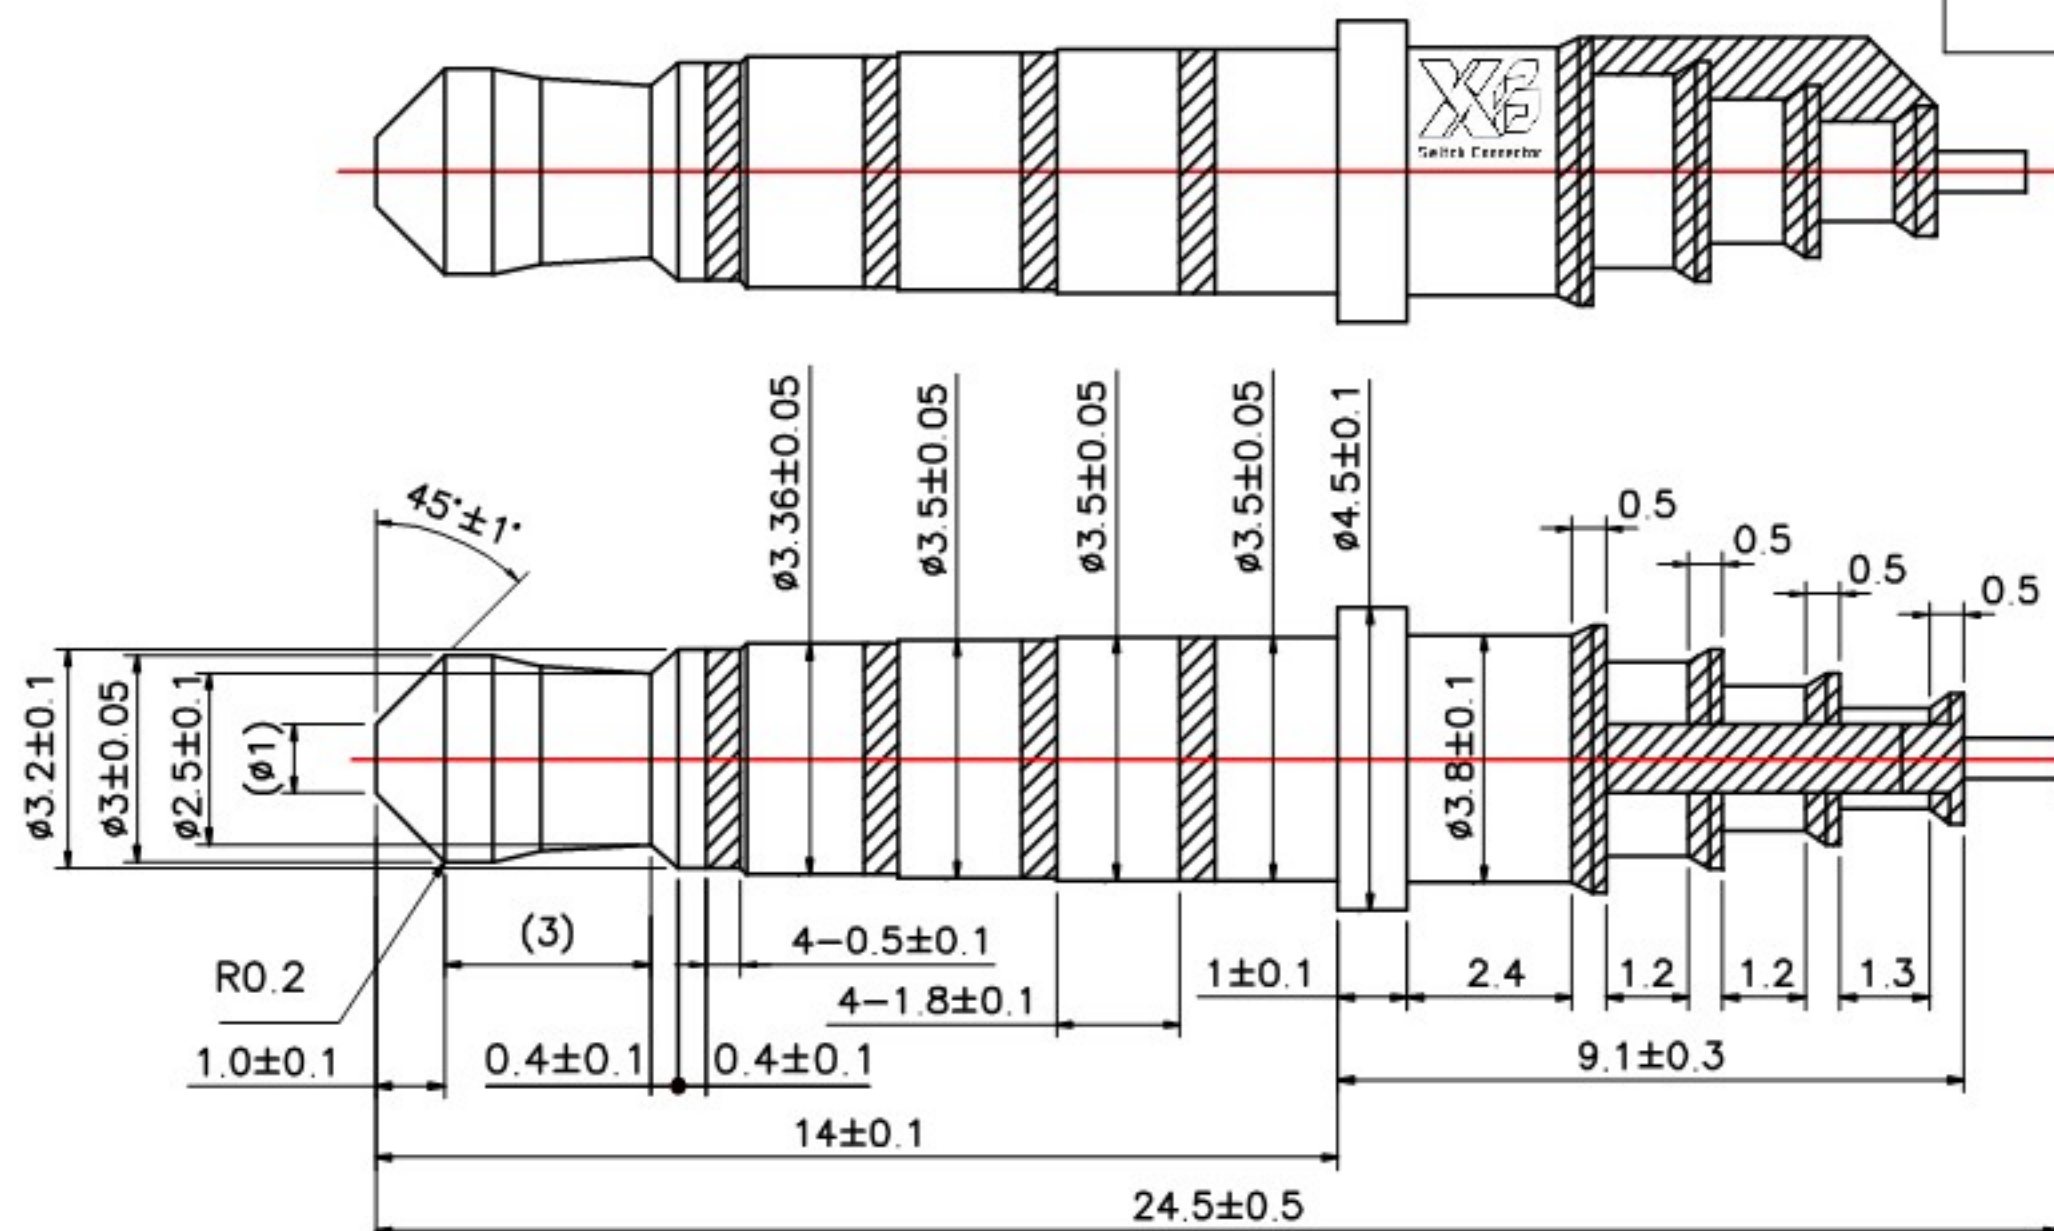

Technology Request:

- 1.Outlook:No burr, no hurt.
- 2.Electronic performance:
 - a:Insulation resistance: Above DC500V/100MΩ;
 - b:Endure voltage:AC500V at 1 minute;
 - c:Contact resistance:Under 30mΩ;
- 3.Insertion force & withdrawal force:0.3-3kgf.
- 4.Salt spray test:24H.
- 5.Meet RoHS.
- 6.Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance	7	5段管	C3604	Ni 1-3um
比例 Scale	5:1	xx.:±0.3	6	四段管	C2680	Ni 1-3um
视图 Third angle projection		x.x.:±0.1	5	三段管	C2680	Ni 1-3um
		.xx.:±0.05	4	二段管	C2680	Ni 1-3um
			3	正极针	C3604	Ni 1-3um
			2	PLASTIC	POM	BLACK
			1	NO.	PART	MATERIAL
						PLATING

核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY
June	杨义邦	李莹峰



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

规格 DESCRIPTION:	3.5 5POLE PLUG 3.5*4.5*24.5
品名 P/N:	P35545245
图号 DRAWN NO:	CP-05-0015