


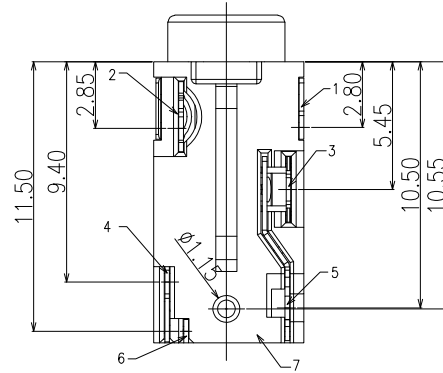




RoHS Compliant

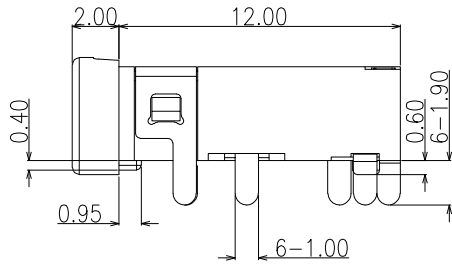



3D VIEW

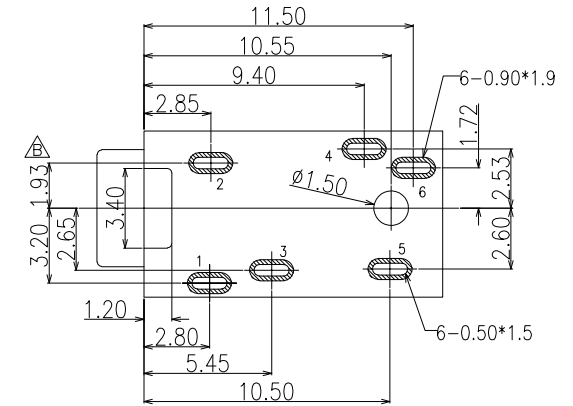

P.C.B. LAYOUT
TOP VIEW

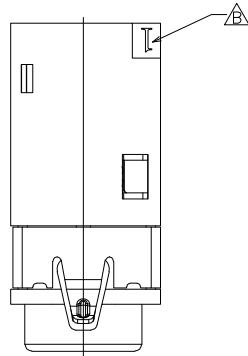

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 50 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;

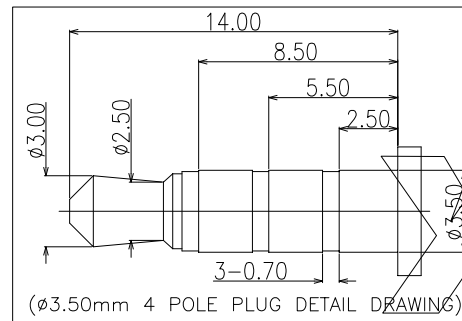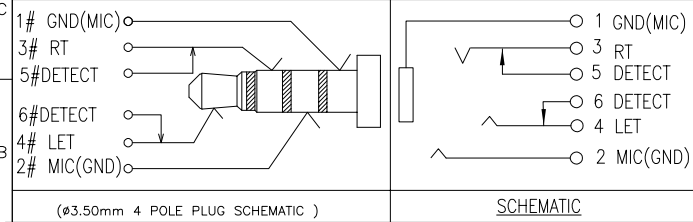

7	HOUSING	HIGHT TEMPERATURE PLASTIC COLOR BLACK		1
6	TERMINAL 6#	COPPER ALLOY; NICKEL UNDER PLATING OVERALL,GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA	T=0.20mm	1
5	TERMINAL 5#	COPPER ALLOY; NICKEL UNDER PLATING OVERALL,GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA	T=0.20mm	1
4	TERMINAL 4#	COPPER ALLOY; NICKEL UNDER PLATING OVERALL,GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA	T=0.20mm	1
3	TERMINAL 3#	COPPER ALLOY; NICKEL UNDER PLATING OVERALL,GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA	T=0.20mm	1
2	TERMINAL 2#	COPPER ALLOY; THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING.	T=0.20mm	1
1	TERMINAL 1#	COPPER ALLOY; THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING.	T=0.20mm	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
UNLESS OTHERWISE GENERAL TOLERANCE:				
X.xxx ±0.10				
X.xx ±0.20				
X.x ±0.30				
X. ±0.50				
ANGULAR:				
X.xx ±1°				
X.x ±3°				
X. ±5°				
TITLE:			P/N: XB-J906FB06GF	
ø3.5mm PHONE JACK			MODEL:	
H=4.0mm CONNECTOR			DRAW NO.:	
THIRD ANGLE PROJECTION		UNIT:	SCALE:	SIZE:
		mm	1:1	A4
				SHEET:
				1/1

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DESIGN	ZB	2017.12.08	
CHECK	ZB	2017.12.08	
APPROVAL	YCW	2017.12.08	
ECN NO.	REV.	DESCRIPTION	DATE
N/A	A	NEW DRAWING	2017.12.08
			ZB