
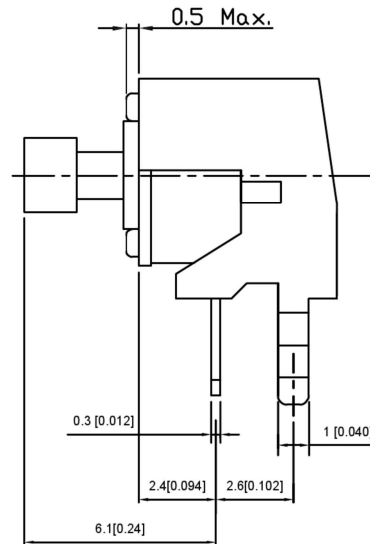


Technical drawing of a mechanical part, likely a bracket or support, showing dimensions in millimeters (mm) and inches (in). The drawing includes a central circular feature with a square hole, four mounting holes, and two vertical slots labeled 1 and 2. Dimensions are provided for overall size, hole positions, and slot widths.

Dimensions (mm [in]):

- Overall width: 8.4 [0.331]
- Overall height: 6.0 [0.236]
- Distance from top edge to center of circular feature: 7 [0.276]
- Distance from top edge to center of square hole: 4 [0.158]
- Distance from top edge to center of mounting holes: 3.7 [0.146]
- Distance from top edge to center of vertical slots: 3.9 [0.154]
- Distance from top edge to center of vertical slots (alternative): 1.7 [0.067]
- Distance from top edge to center of vertical slots (alternative): 0.4 [0.016]
- Distance from top edge to center of vertical slots (alternative): 0.7 [0.028]
- Distance from top edge to center of vertical slots (alternative): 4.5 [0.177]

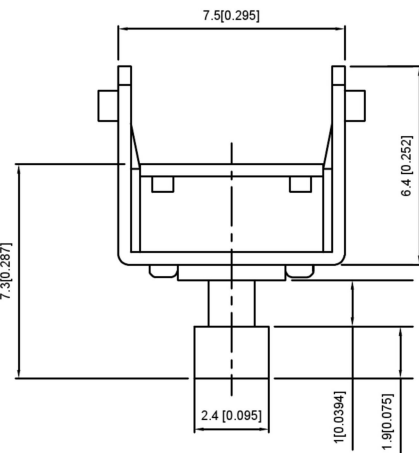

Contact Rating: 50mA,12V DC
 Contact Resistance: 100mΩ max
 Insulation Resistance: 100mΩ min.500V DC
 Dielectric Strength: 250V AC/1minute
 Travel: 0.25mm
 Operating Temp: -30℃~+85℃
 Storage Temp: -30℃~+80℃

PAPT NO	TC-1102NT-X
Operating Force	A:100gf B:160gf C:260gf
Height	H:7.3

⑤	Terminal	—	2	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	Pa46		—
②	Cover	—	1	Spcc	Plating Nickel	—
①	Keystone	—	1	Pa46		—
ITEM	PAPT NAMF	TER.NO	QTY	MATERIAL	FINISHING	REMARK

							DSND		SCALE: N/A	MODEL TYPE: TACT SWITCH		
				ANGLAR	±5°		DWN		VIEW: 	PART NO.: TC-1102NT-X		
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:		
				4<L ≤ 16	±0.3		APPD		SIZE: A4			
				16<L ≤ 63	±0.4							
				L > 63	±0.5							
		DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES							
www.alpsr.com www.gdxjdz.com www.xbswitch.com							DONG GUAN XI BANG ELECTRONIC CO., LTD					
							WEIGHT		SHEET		REVISIC	
									1/1		A0	