

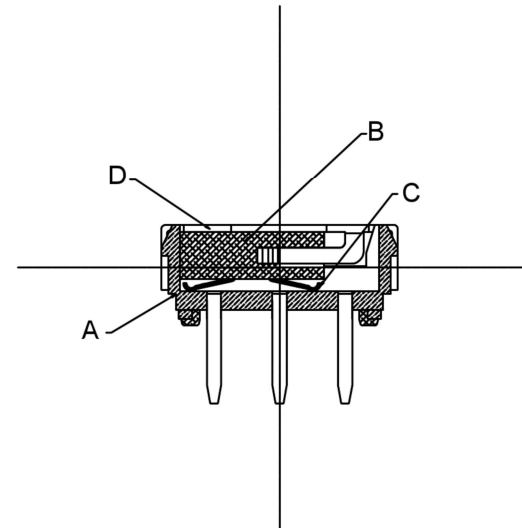
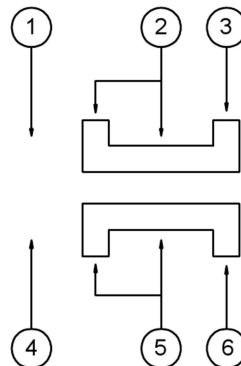
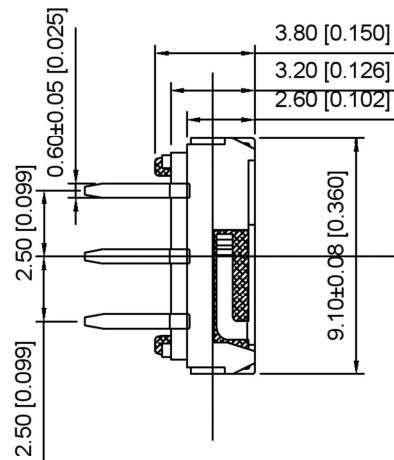
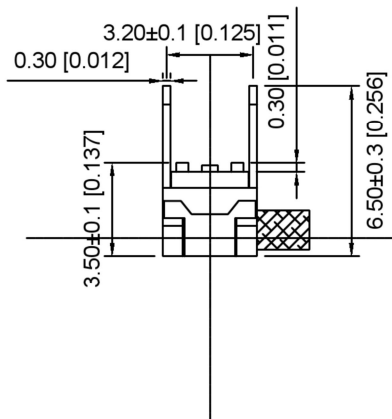


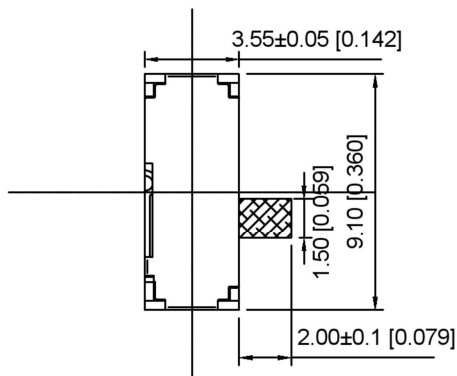

NOTE:
Rating: DC 12V 100mA
Operating Force:200±50gf
Lifetime:10,000 Cycles

PAPT NO	L
SK-3245D-02-L1	2.0
SK-3245D-02-L2	2.5
SK-3245D-02-L3	3.0
SK-3245D-02-L4	4.0

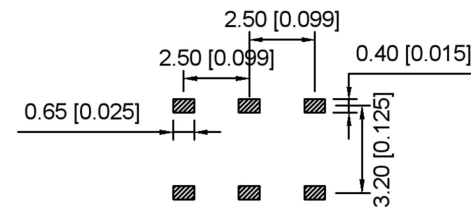

5	Terminal	—	6	Brass (0.30t)	ag Plated
4	Contact spring	—	1	Phosphor bronze	ag Plated
3	Base	—	1	PPA	Black
2	Cover	—	1	Sus	Natural
1	Keystake	—	1	POM	Black
ITEM	PAPT NAME	TER.NO	QTY	MATERIAL	FINISHING

				ANGLAR	±5°
				L ≤ 4	±0.2
				4<L ≤ 16	±0.3
				16<L ≤ 63	±0.4
	DATE	REVISED	APPROVED	L> 63	±0.5
				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DSND		SCALE: N/A	MODEL TYPE: SLIDE SWITCH		
DWN		VIEW:	PART NO.: SK-3245D-02-X		
CHKD		UNIT: mm/in	DWG NO.: X-SK-3245D-02-X		
APPD		SIZE: A4			
DONG GUAN XI BANG ELECTRONIC CO., LTD			WEIGHT	SHEET	REVISIC
				1/1	A0