

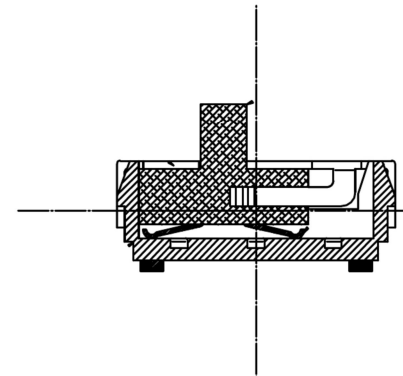
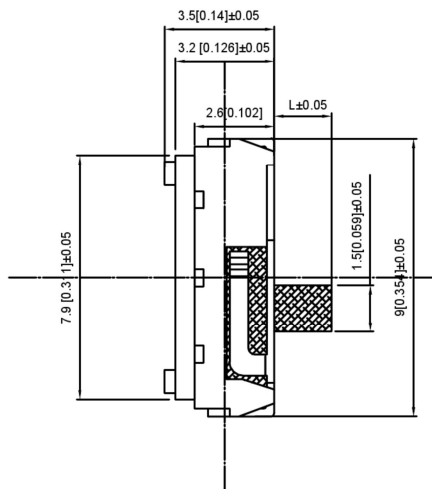
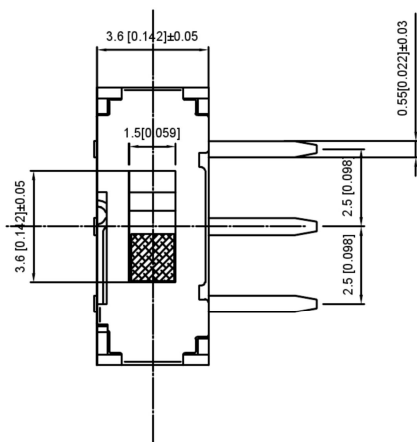


NOTE:
 Rating: DC 12V 50mA
 Operating Force: 200±100gf
 Lifetime: 10,000 Cycles



PAPT NO	L
SK-3260D-01-L1	2.0
SK-3260D-01-L2	2.5
SK-3260D-01-L3	3.0
SK-3260D-01-L4	4.0

5	Terminal	—	3	Brass (0.30t)	ag Plated	—
4	Contact spring	—	1	Phosphor bronze	ag Plated	—
3	Base	—	1	Pa46	Black	—
2	Cover	—	1	Sus	Natural	—
1	Keystake	—	1	Pa46	Black	—
ITEM	PAPT NAME	TER,NO	QTY	MATERIAL	FINISHING	REMARK

				ANGULAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
	DATE	REVISED	APPROVED	L > 63	±0.5
					UNSPECIFIED TOLERANCES
www.alpsr.com www.gdxidz.com www.xbsswitch.com					



DSND		SCALE: N/A	MODEL TYPE: SLIDE SWITCH
DWN		VIEW:	PART NO.: SK-3260D-01-X
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	
		WEIGHT	SHEET
			1/1
		REVISIC	A0

DONG GUAN XI BANG ELECTRONIC CO., LTD