
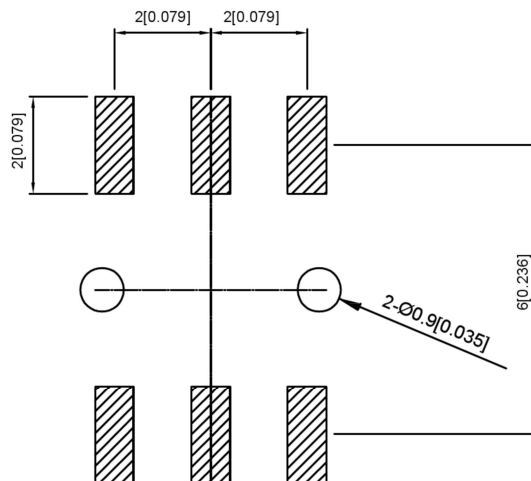
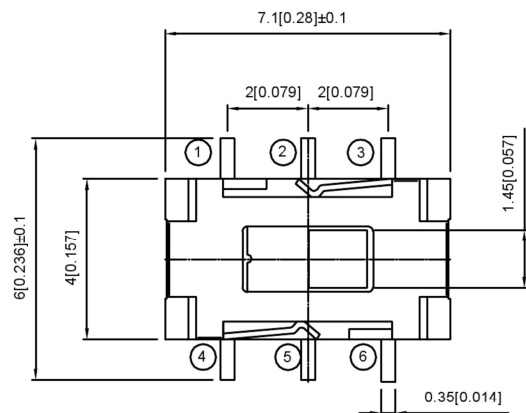



NOTE:
Rating:DC 12V 50mA Operating
Force:200±100gf
Lifetime:10 000 Cycles

PAPT NO	L
SS-3380S-L0	1.5
SS-3380S-L1	2.0
SS-3380S-L2	3.0
SS-3380S-L3	4.0

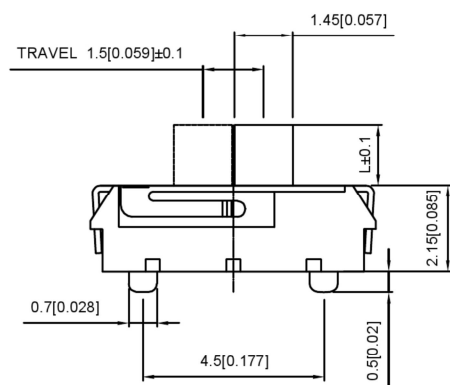

		—				—
		—				—
5	Terminal	—	6	Brass (0.30t)	ag Plated	—
4	Contact spring	—	1	Phosphor branze	ag Plated	—
3	Base	—	1	Lcp	Black	—
2	Cover	—	1	Sus	Natural	—
1	Keystake	—	1	Pa46	Black	—
ITEM	PAPT NAME	TER,NO	QTY	MATERIAL	FINISHING	REMAR

				ANGLAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
	DATE	REVISED	APPROVED	L > 63	±0.5
				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DSND		SCALE: N/A	MODEL TYPE: SLIDE SWITCH
DWN		VIEW:	PART NO.: SS-3380S-X
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	
		WEIGHT	SHEET
			1/1
		REVISIC	A0

DONG GUAN XI BANG ELECTRONIC CO., LTD