
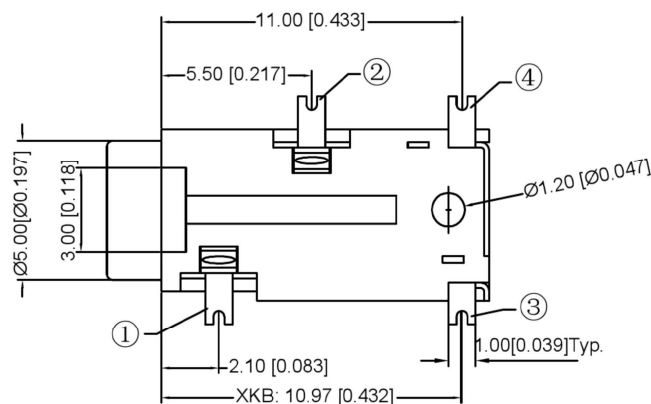
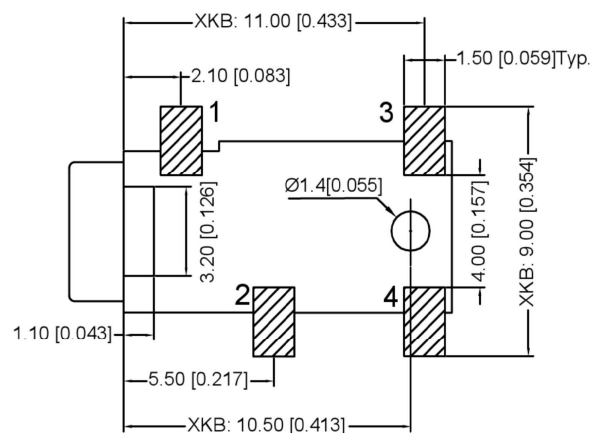
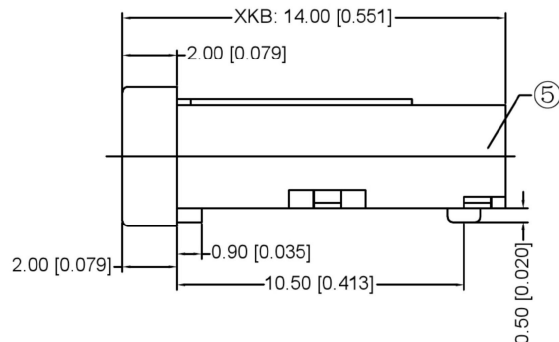
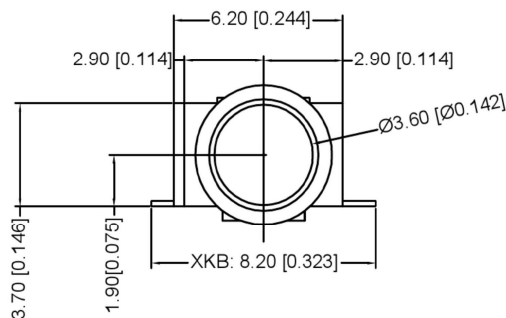


P.C.B LAYOUT
TOP VIEW




SPECIFICATION

规格

1. Rating : DC 30V 0.5A;
额定值: DC 30V 0.5A;
2. Contact resistance: $\leq 0.03\Omega$;
接触电阻: $\leq 0.03\Omega$
3. Insulation resistance: $\geq 100M\Omega$ (DC250V);
绝缘电阻: $\geq 100M\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
耐压电压: 500VAC
5. Insertion and extraction force: 3-20N;
插拔力: 3-20N;
6. life test: 5,000 cycles
寿命测试: 5000次循环

SCHEMATIC

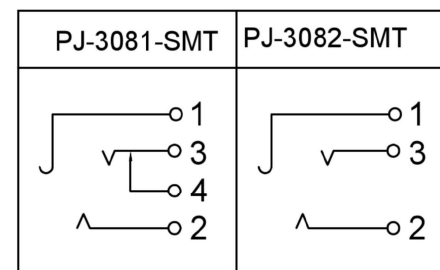

		MATERIAL		PLATING
5	HOUSING	1	PA9T	
4	4# CONTACT FOOT	1	BRASS	Ag-Plating
3	3# CONTACT FOOT	1	BRONZE	Ag-Plating
2	2# CONTACT FOOT	1	BRONZE	Ag-Plating
1	1# CONTACT FOOT	1	BRONZE	Ag-Plating

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
ANGULAR				$\pm 5^\circ$
$L \leq 4$				± 0.2
$4 < L \leq 16$				± 0.3
$16 < L \leq 63$				± 0.4
$L > 63$				± 0.5



DONG GUAN XI BANG ELECTRONIC CO., LTD

DSND		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK
DWN		VIEW:	PART NO.: PJ-308X-SMT
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	
WEIGHT	SHEET	REVISION	
	1/1	A0	