
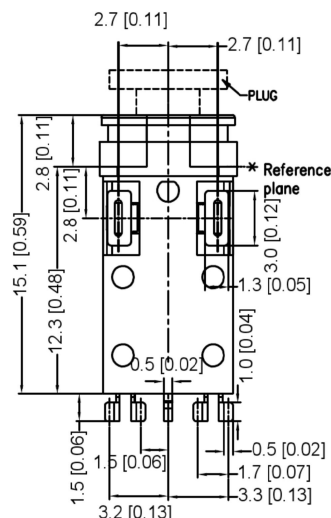

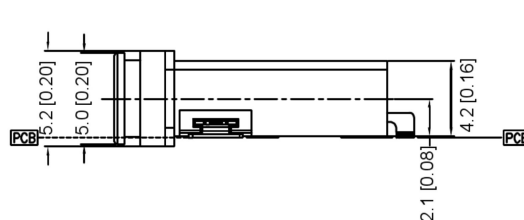




SPECIFICATIONS:

1. INSULATION RESISTANCE: A VOLTAGE OF 500V DC SHALL BE APPLIED TO THE TERMINALS. AFTER WHICH MEASUREMENT SHALL BE MADE. A CAUSE FOR THE MEASUREMENT SHALL BE USED: THE INSULATED GALVANIC CELL.
2. CONTACT RESISTANCE: 30mA OR LESS.
3. VOLTAGE: 11E500V AC FOR ONE MINUTE.
4. DURABILITY: 5,000 INSERTION/REMOVAL CYCLES (MINIMUM).
5. INSERTION FORCE: 0.3KG FN ± 0.03KG.
6. WITHDRAWAL FORCE: 0.3KG OF - 3.0KG OF.
7. WATER PROOFNESS: THIS PRODUCT IS CONFORM TO JIS STANDARD IPX7 BY WATERPROOF JACK.
8. USING PLUG: 43.5MM、4-POLE STEREO EARPHONE (LCH/RCH/GND/MIC).
9. PRIMED THAT THEY CONFIRM TO JSC6560.
9. O-RING ASSEMBLY AREA TO MAINTAIN SMOOTH. SHALL HAVE NO BURRS.

IP-X7

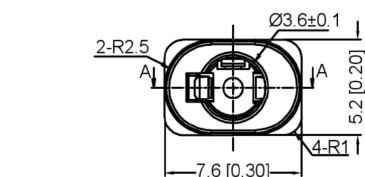

Bottom view

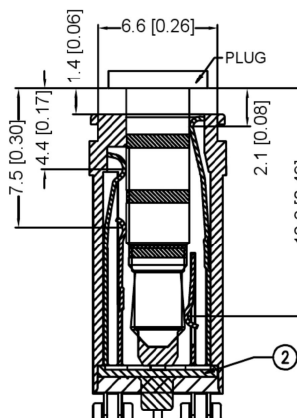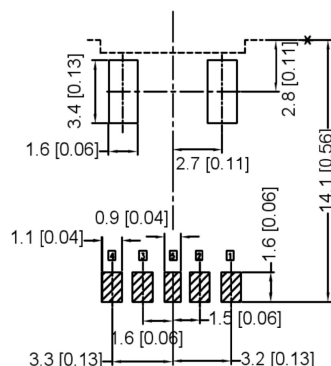

⑨	BOND	----	1	----
⑧	TERMINAL	----		Copper alloy t=0.2
⑦	TIP SPRING-2	⑤	1	Ti-Cu t=0.2
⑥	RING SPRING-2	④	1	Ti-Cu t=0.2
⑤	RING SPRING-1	③	1	Ti-Cu t=0.2
④	TIP SPRING-1	②	1	Ti-Cu t=0.2
③	EARTH SPRING	①	1	Ti-Cu t=0.2
②	COVER	----	1	PA9T(BLACK)
①	HOUSING	----	1	PA9T(BLACK)
ITEM	PART NAME	TERMINAL	QTY	MATERIAL

							DSND		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK		
							DWN		VIEW: 	PART NO.: PJ-3255B		
							CHKD		UNIT: mm/in	DWG NO.:		
							APPD		SIZE: A4			
REVISIONS						UNSPECIFIED TOLERANCES						
www.alpsr.com www.qdxjdz.com www.xbswitch.com						DONG GUAN XI BANG ELECTRONIC CO., LTD			WEIGHT			
									SHEET			
									1/1			
									REVISION			
									A0			