

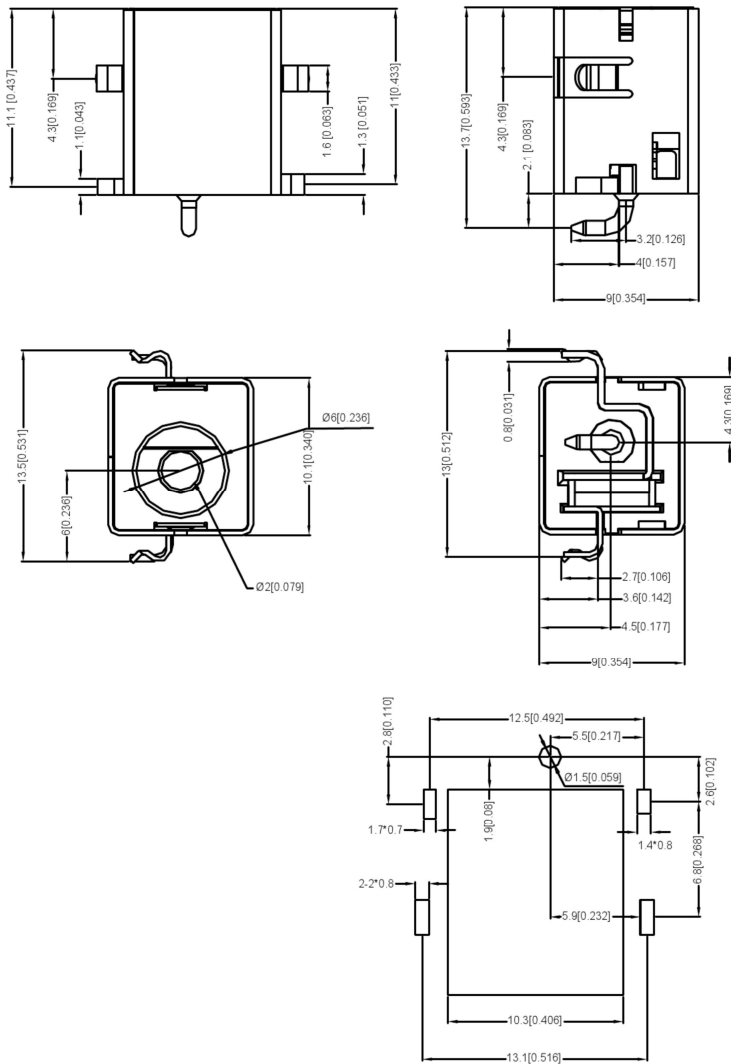




P.C.B LAYOUT TOP VIEW



SPECIFICATION

规格

Rating: DC 20V 5.5A

额定值: 直流20V 5.5A

Contact resistance: $\leq 0.03\Omega$

接触电阻: $\leq 0.03\Omega$

Insulation resistance: $\geq 100M\Omega$

绝缘电阻: $\geq 100M\Omega$

Withstand voltage: AC500V(50Hz)/min

耐受电压: AC500V (50Hz) /min

Insertion and extraction: 3-20N

插入和提取: 3-20N

Use temperature range: -30-70 °C


使用温度范围: -30-70 °C

Life test :5000 cycles

寿命试验: 5000次循环

SCHEMATIC	
Model	DC-C300-5.5A
Center Pin	$\varnothing 1.65\text{ mm}$
	$\varnothing 2.0\text{ mm}$
	$\varnothing 2.5\text{ mm}$

	MATERIAL	PLATING
center pin	Brass	tin
coat	Brass	
cover palte	Sus	
terminal 1	Phosphor Bronze	tin
terminal 2	Phosphor Bronze	tin
terminal 3	Phosphor Bronze	tin
plastic	Ppa	

				ANGLAR	±5°		DSND		SCALE: N/A	MODEL TYPE: DC POWER JACK		
				L ≤ 4	±0.2		DWN		VIEW: 	PART NO.: DC-C300-5.5A-2.0		
				4<L ≤ 16	±0.3		CHKD		UNIT: mm/in	DWG NO.:		
				16<L ≤ 63	±0.4		APPD		SIZE: A4			
				L > 63	±0.5							
REVISIONS				UNSPECIFIED TOLERANCES		DONG GUAN XI BANG ELECTRONIC CO., LTD				WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com											1/1	A0