

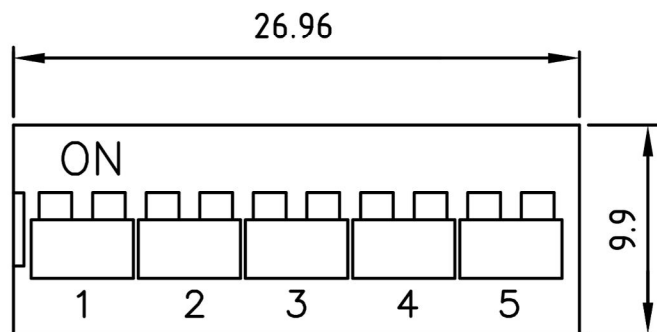
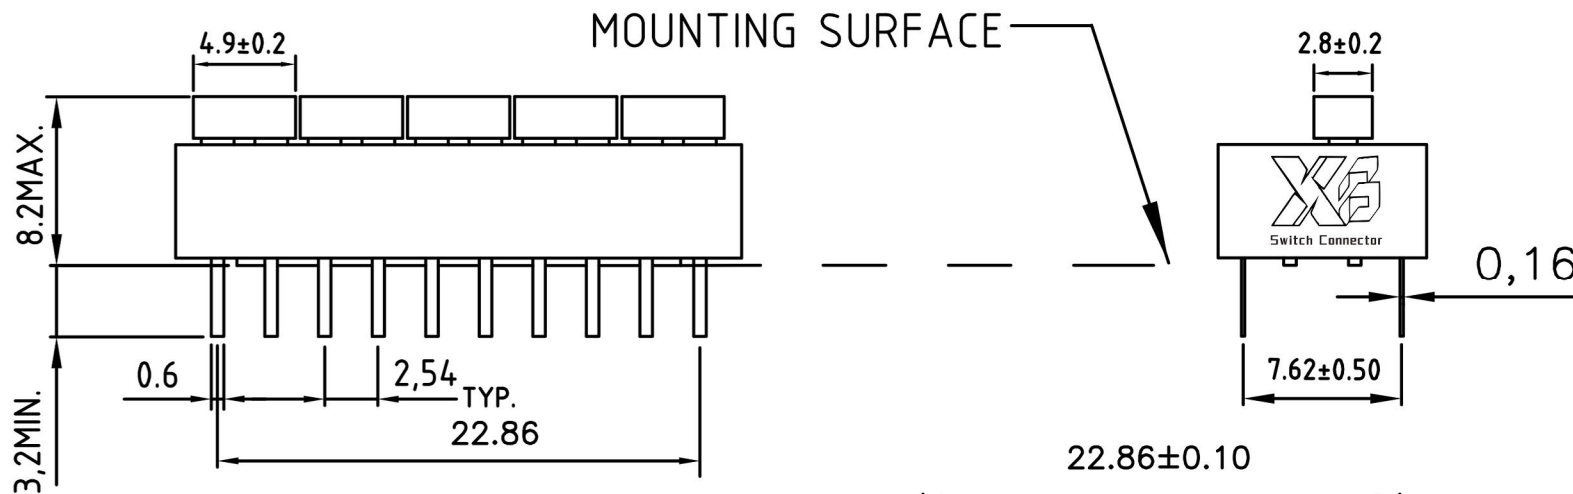


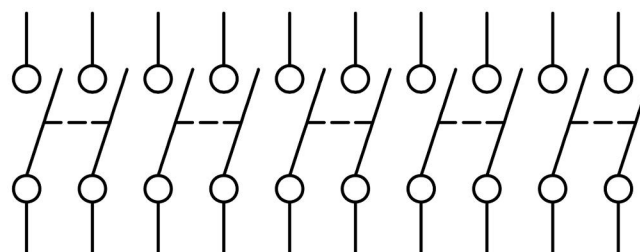

ON POSMON

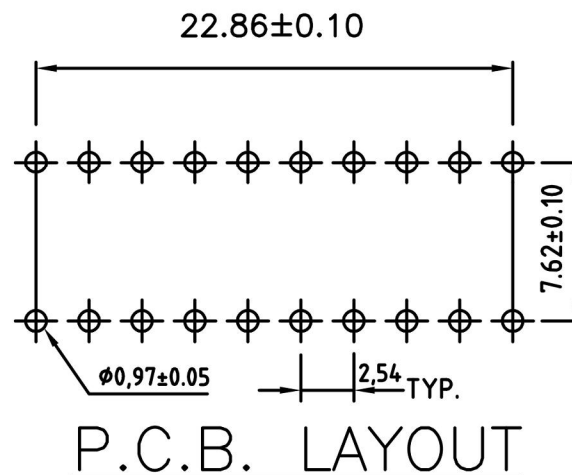

CIRCUIT DIAGRAM

NOTE: 1. ALL DIMENSIONS ARE IN MILLIMETERS.

2. GENERAL TOLERANCE:±0.2mm

3. MATERIAL: Δ BASE:UL94V-0 PBT Thermoplastic(Black)
Δ COVER:UL94V-0 PBT Thermoplastic(Red.Black.Blue)
Δ ACTUATORS:UL94V-0 PBT Thermoplastic(White)
Δ CONTACT PLATING:Gold plating over nickel
Δ PITTING MATERIAL:Epoxy

Δ ELECTRICAL

Electrical:2000 operations per switch-
24 VDC,25mA.

Non-Switching Rating:100mA,50VDC.

Switching Rating:25mA,24VDC.

Contact Resistance:50mΩ max. at initial.

Δ MECHANICAL

Mechanical life: 2000 operations per swith.

Stroke: 2.0mm.

Operation Temp: -25℃ to 70℃

Storage Temp: -40℃ to 85℃.

				ANGLAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
				L > 63	±0.5
	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	



DSND		SCALE: N/A	MODEL TYPE: DIP SWITCH
DWN		VIEW: 	
CHKD		UNIT: mm/in	DWG NO.: XB-DS-10XBSL
APPD		SIZE: A4	