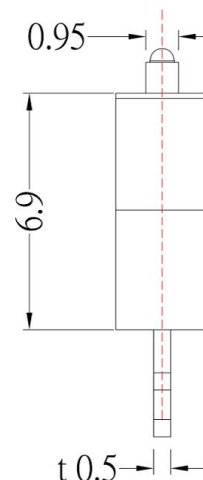
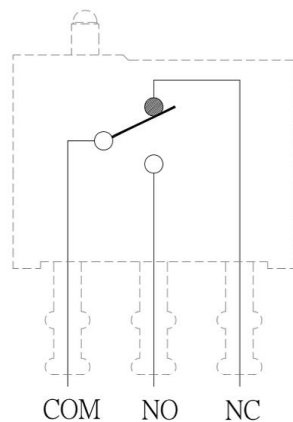
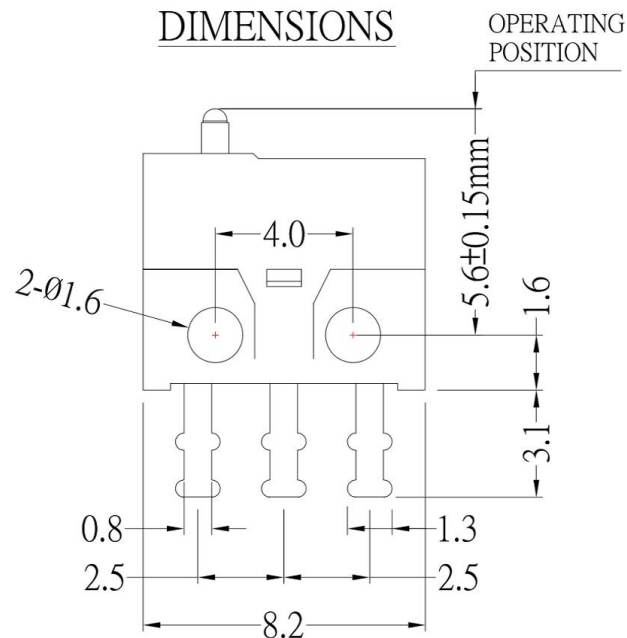
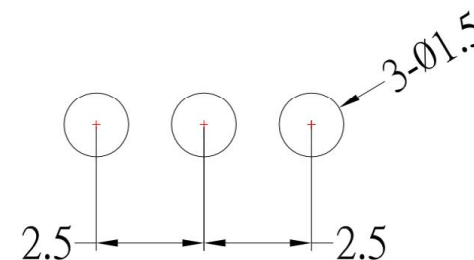


CAD FILE:

ROHSDIMENSIONSP.C.B LAYOUT MOUNTINGSPECIFICATION

1. Rating : DC 30V 500mA ;
2. Operating force : 120gf Max ;
3. Operating position : 5.6 ± 0.15 mm ;
4. Contact resistance : 100m ohm Max ;
5. Operating life : 300,000 cycles °

8					TOLERANCE UNLESS SPECIFIED						
7											
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版		ZENQ. CHEN	
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.	
4	CONTACT	SUS	1	Ag CLAD	TITLE : Detector Switch			UNIT : mm	DRWG NO.: XB-TM-W-13-3		
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-TM-W-13-3			SCALE: 5:1	DWN.	JUN. YANG	2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			CHK'D		DONG. PANG	2012-9-25
1	KNOB	PPA	1	BLACK				APPD.		ZENQ. CHEN	2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH							