



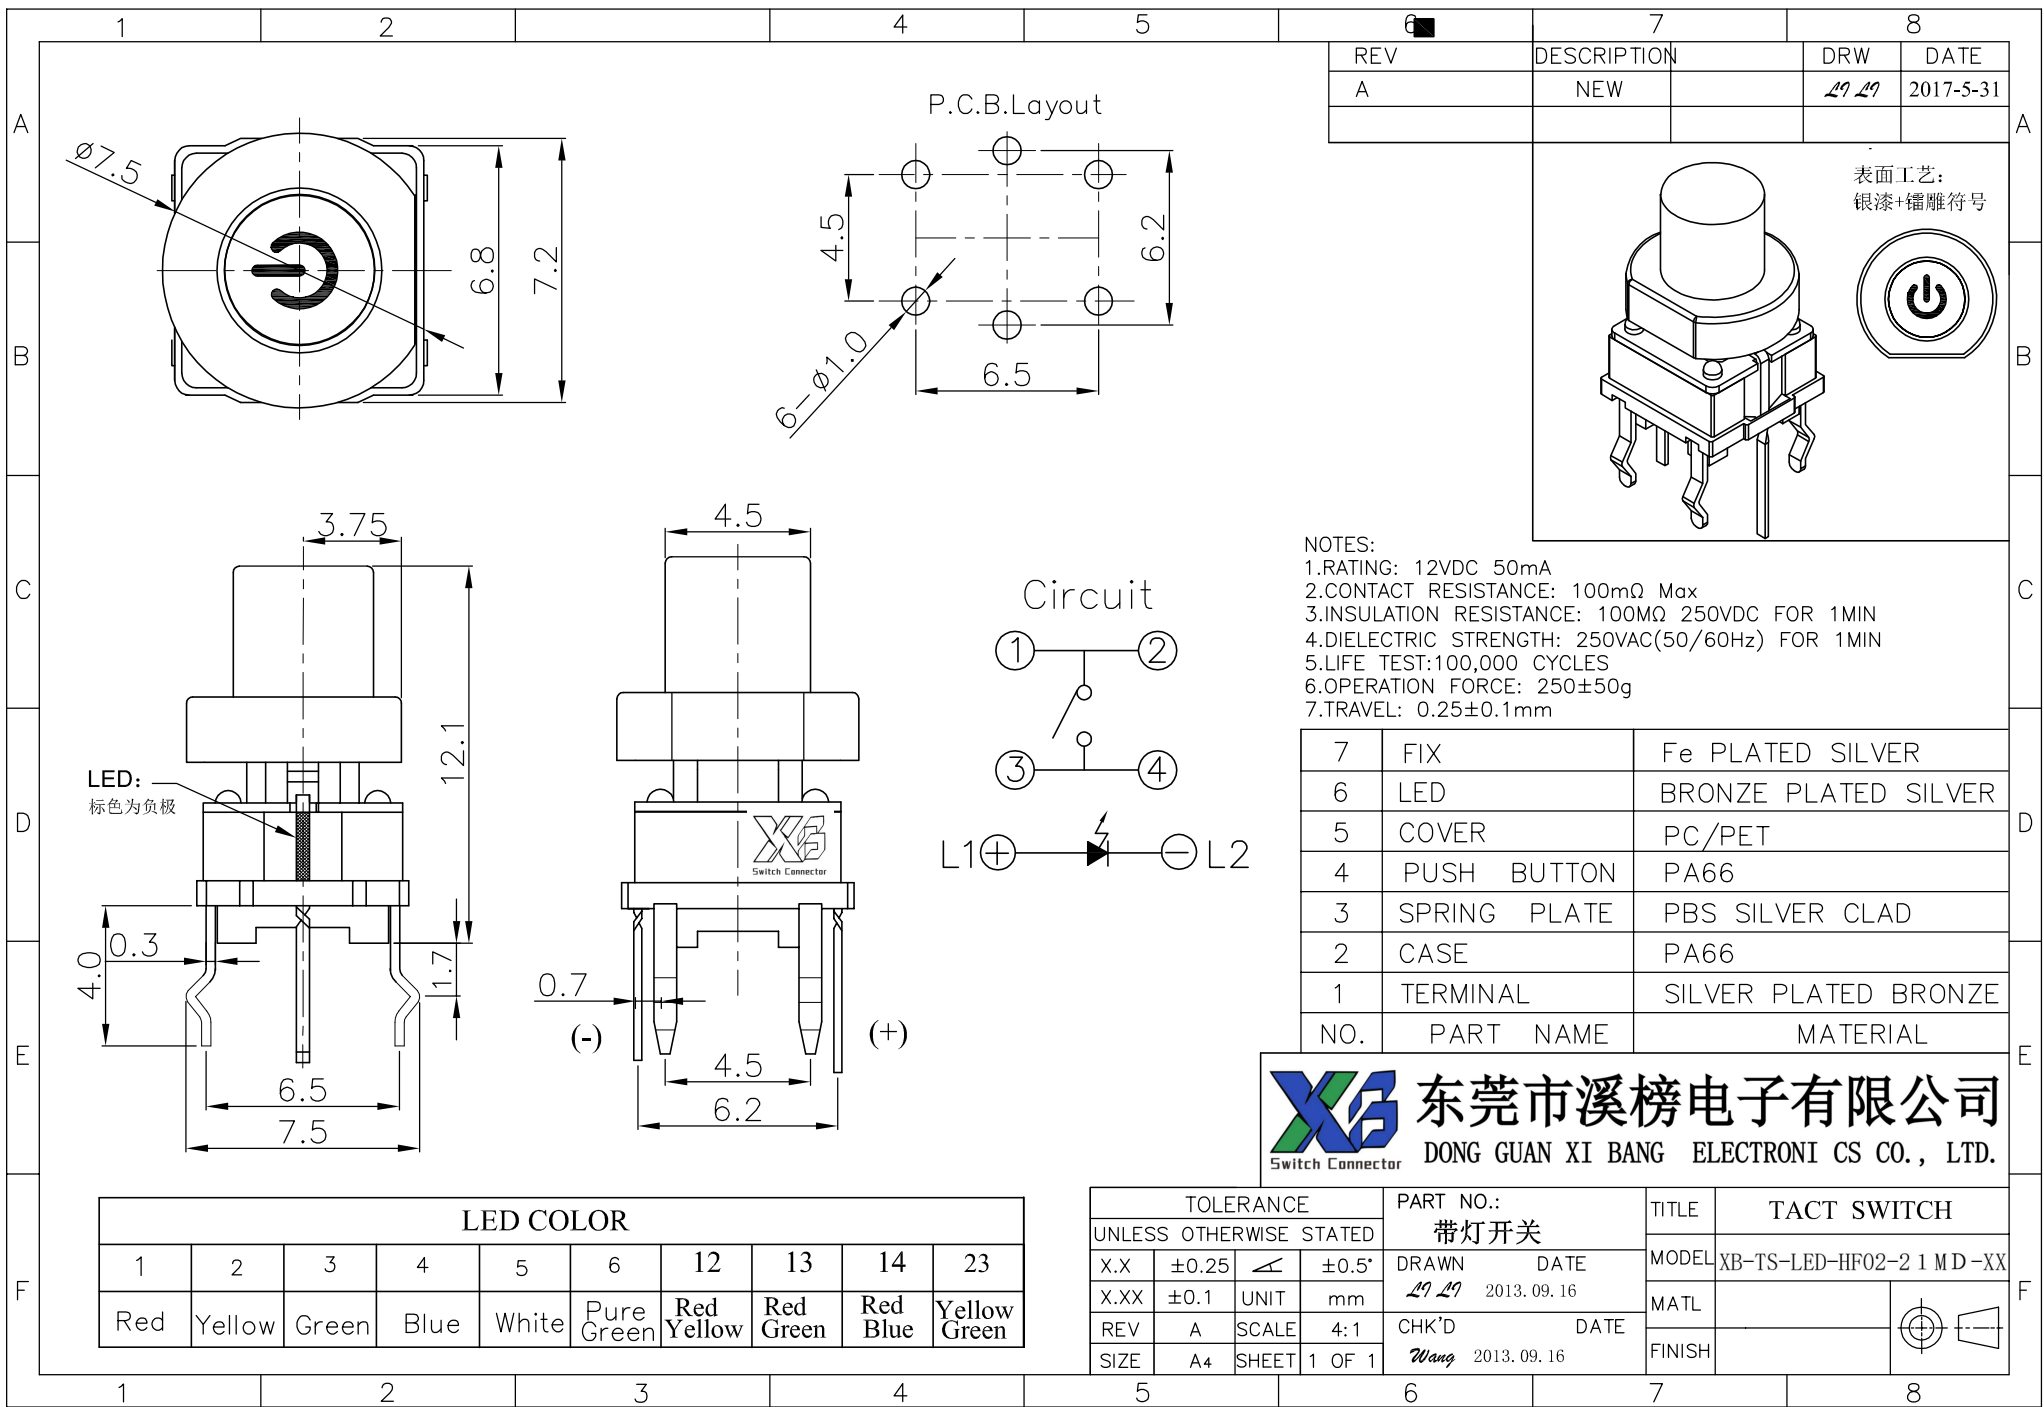

REV	DESCRIPTION	DRW	DATE
A	NEW	29 29	2017-5-31

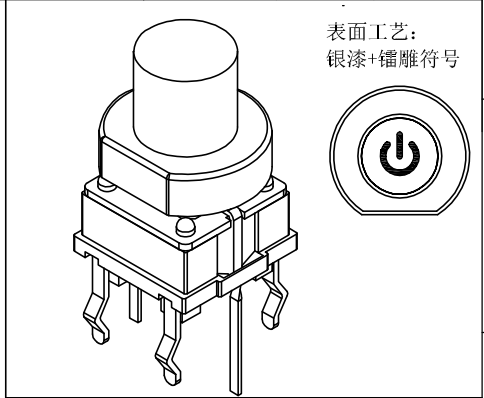

- NOTES:
- 1.RATING: 12VDC 50mA
 - 2.CONTACT RESISTANCE: 100mΩ Max
 - 3.INSULATION RESISTANCE: 100MΩ 250VDC FOR 1MIN
 - 4.DIELECTRIC STRENGTH: 250VAC(50/60Hz) FOR 1MIN
 - 5.LIFE TEST:100,000 CYCLES
 - 6.OPERATION FORCE: 250±50g
 - 7.TRAVEL: 0.25±0.1mm

7	FIX	Fe PLATED SILVER
6	LED	BRONZE PLATED SILVER
5	COVER	PC/PET
4	PUSH BUTTON	PA66
3	SPRING PLATE	PBS SILVER CLAD
2	CASE	PA66
1	TERMINAL	SILVER PLATED BRONZE
NO.	PART NAME	MATERIAL

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

LED COLOR									
1	2	3	4	5	6	12	13	14	23
Red	Yellow	Green	Blue	White	Pure Green	Red Yellow	Red Green	Red Blue	Yellow Green

TOLERANCE UNLESS OTHERWISE STATED				PART NO.: 带灯开关		TITLE	TACT SWITCH	
X.X	±0.25	mm	±0.5°	DRAWN	DATE	MODEL	XB-TS-LED-HF02-2 1 MD-XX	
X.XX	±0.1	UNIT	mm	29 29	2013. 09. 16	MATL		
REV	A	SCALE	4: 1	CHK'D	DATE	FINISH		
SIZE	A4	SHEET	1 OF 1	Wang	2013. 09. 16			