

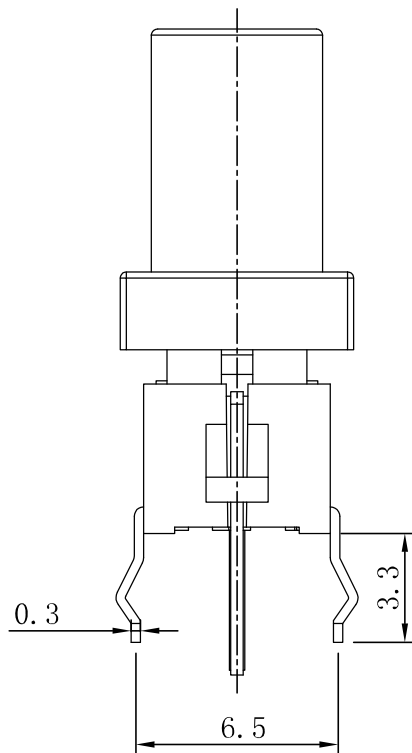
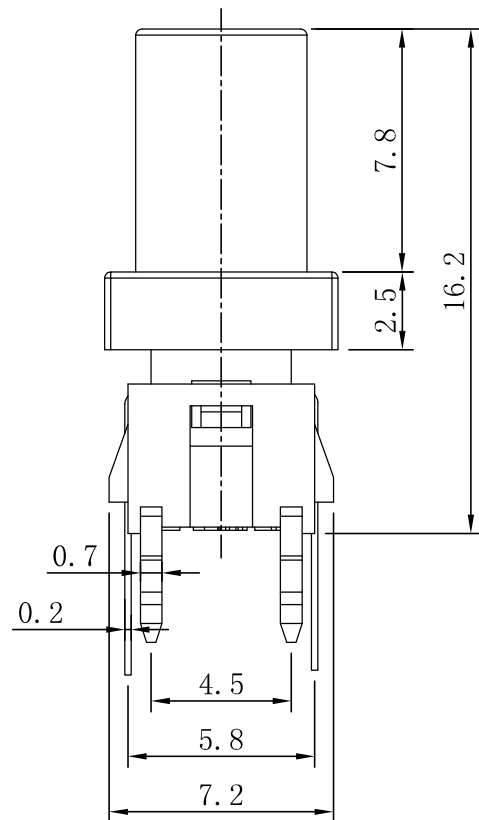



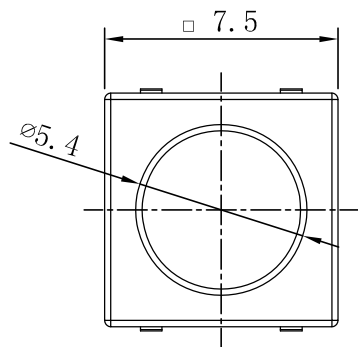



注：开关LED标示颜色的一端为LED的负极端

REV	DESCRIPTION	DRW	DATE
A	NEW	00000	2009-1-16

CIRCUIT



P. C. B LAYOUT

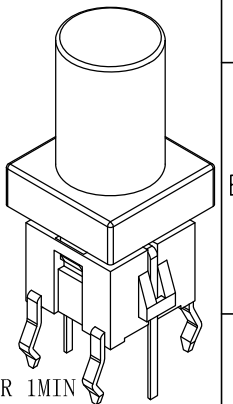

NOTES:

1. RATING: 12VDC 50mA
2. CONTACT RESISTANCE: 100mΩ Max
3. INSULATION RESISTANCE: 100MΩ 250VDC FOR 1MIN
4. DIELECTRIC STRENGTH: 250VAC (50/60Hz) FOR 1MIN
5. LIFE TEST: 100,000 CYCLES
6. OPERATION FORCE: 160±50g
7. TRAVEL: 0.25±0.1mm

LED COLOR					
1	2	3	4	5	6
Red	Yellow	Green	Blue	White	Pure Green

6	COVER	PC
5	LED	GaAsP/GaP
4	TERMINAL	H65(C2680)
3	CONTACT	PBS
2	BUTTON	PA66/POM
1	HOUSING	PA66
ITEM	PART NAME	MATERIAL



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

Tel: 0769-33357881

Fax: 0769-86366615

TOLERANCE				DRAWN	DATE	TITLE	TACT SWITCH
UNLESS OTHERWISE STATED				00000	2009.01.16	MODEL	XB-TS-LED-PB03-107L-X
X.X	±0.25	mm	±2°	CHK'D	DATE	MATL	
X.XX	±0.15	UNIT	mm	APPV'D	DATE	FINISH	
REV	A	SCALE	4:1				
SIZE	A4	SHEET	1 OF 1				