
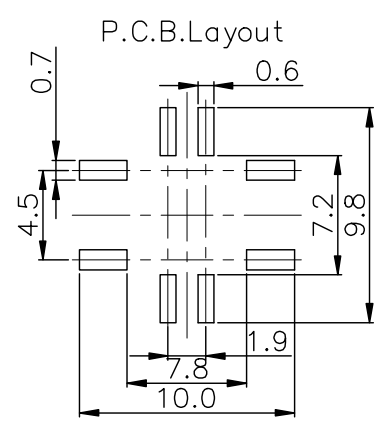
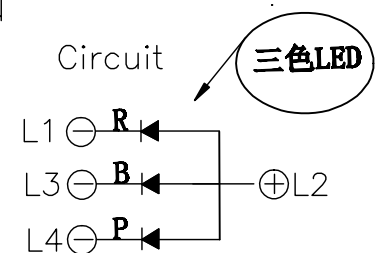
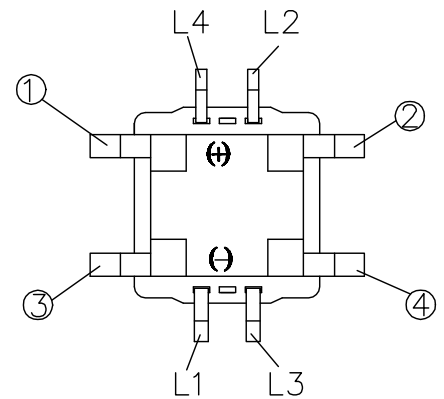
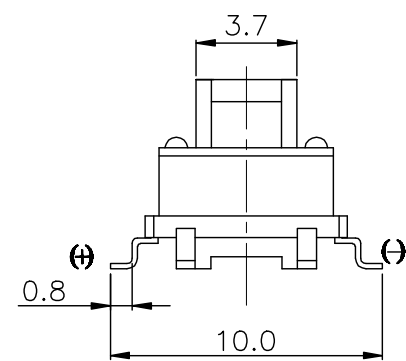
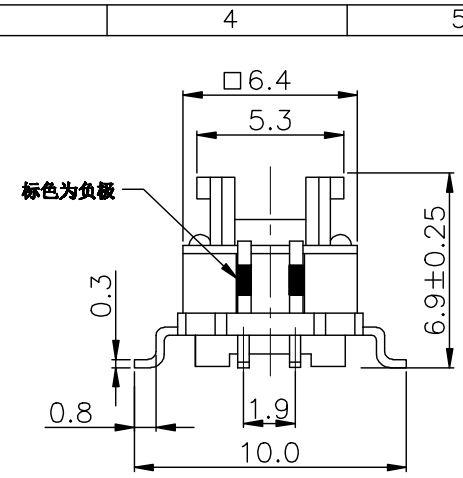


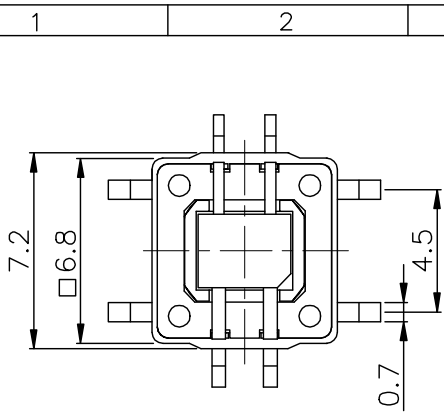

NOTES:
1.RATING: 12VDC 50mA
2.CONTACT RESISTANCE: 100mΩ Max
3.INSULATION RESISTANCE: 100MΩ 250VDC FOR 1MIN
4.DIELECTRIC STRENGTH: 250VAC(50/60Hz) FOR1MIN
5.LIFE TEST:100,000 CYCLES
6.OPERATION FORCE&TRAVEL: SEE SPECIFICATION

LED COLOR				
124	145	134	126	146
Red Blue Yellow	Red White Blue	Red Blue Green	Red Yellow /PureGreen	Red Blue /PureGreen

REV	DESCRIPTION	DRW	DATE
A	NEW	29 29	2012-5-16

6	LED	BRONZE PLATED SILVER
5	COVER	PC/PET
4	PUSH BUTTON	PA66
3	SPRING PLATE	PBS SILVER CLAD
2	CASE	PA66
1	TERMINAL	SILVER PLATED BRONZE
NO.	PART NAME	MATERIAL

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE				PART NO.:		TITLE	TACT SWITCH	
UNLESS OTHERWISE STATED				带灯开关		MODEL		
X.X	±0.25	mm	±0.5°	DRAWN	DATE	MATL		
X.XX	±0.1	UNIT	mm	29 29	2012.05.16			
REV	A	SCALE	4:1	CHK'D	DATE			
SIZE	A4	SHEET	1 OF 1	29 29	2012.05.16	FINISH		