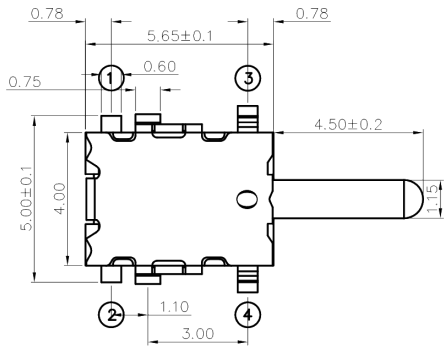


项 目		标 准
电气性能	额定电流:	0.1A
	额定电压:	12V DC
	接触电阻:	200mΩ max.
	绝缘电阻:	100MΩ min.100V DC
	耐压强度:	100V AC (50/60Hz foy 1 minute)
机械性能	操作力度:	100±50gf
	工作寿命:	50,000 cycles
	操作总行程:	2.0mm±0.2mm
	接触通电行程:	0.45 ±0.15mm
环境性能	温度范围:	-10°C ~ +60°C.

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Detection Switch			UNIT : mm	DRWG NO.:XB-TM-VT-19
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL:			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					