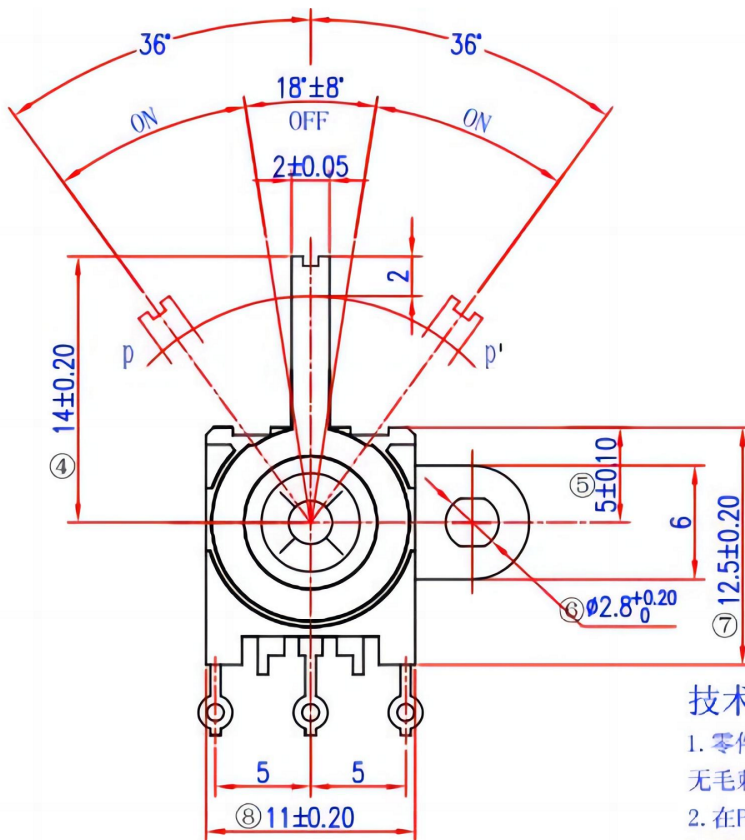



1. 零件表面应光洁, 注塑件无明显飞边及注塑缺陷, 插脚无毛刺及变形;
2. 在PP'切线方向测量动作力为 $\leq 0.7\text{N}$;
3. 手柄左右转过 $\leq 5^\circ$ 必须不通电;
4. 未注尺寸公差均按GB1804-m级精度要求(具体见下表)。

8					TOLERANCE UNLESS SPECIFIED							
7												
6					WITHIN 1.5mm : ±0.1mm		A	2012-9-25	初 版		ZENQ. CHEN	
5					OVER 1.5mm : ±0.2mm		ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.	
4	CONTACT	SUS	1	Ag CLAD	TITLE : Detector Switches				UNIT : mm	DRWG NO.:XB-TM-1112-3P-EL		
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED					MODEI:			
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.				CHK'D	DONG. PANG	2012-9-25	
1	KNOB	PPA	1	BLACK					APPD.			
NO.	PARTS	MATERIALS	Q'TY	FINISH								