

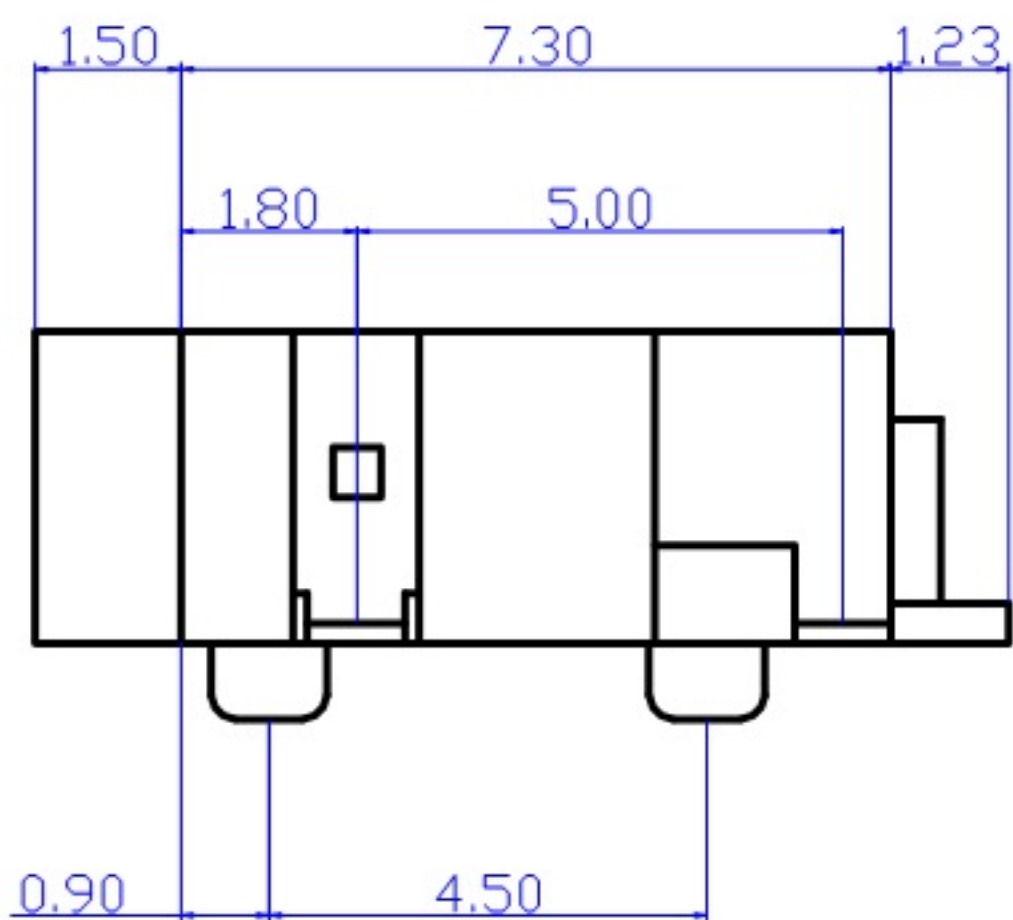
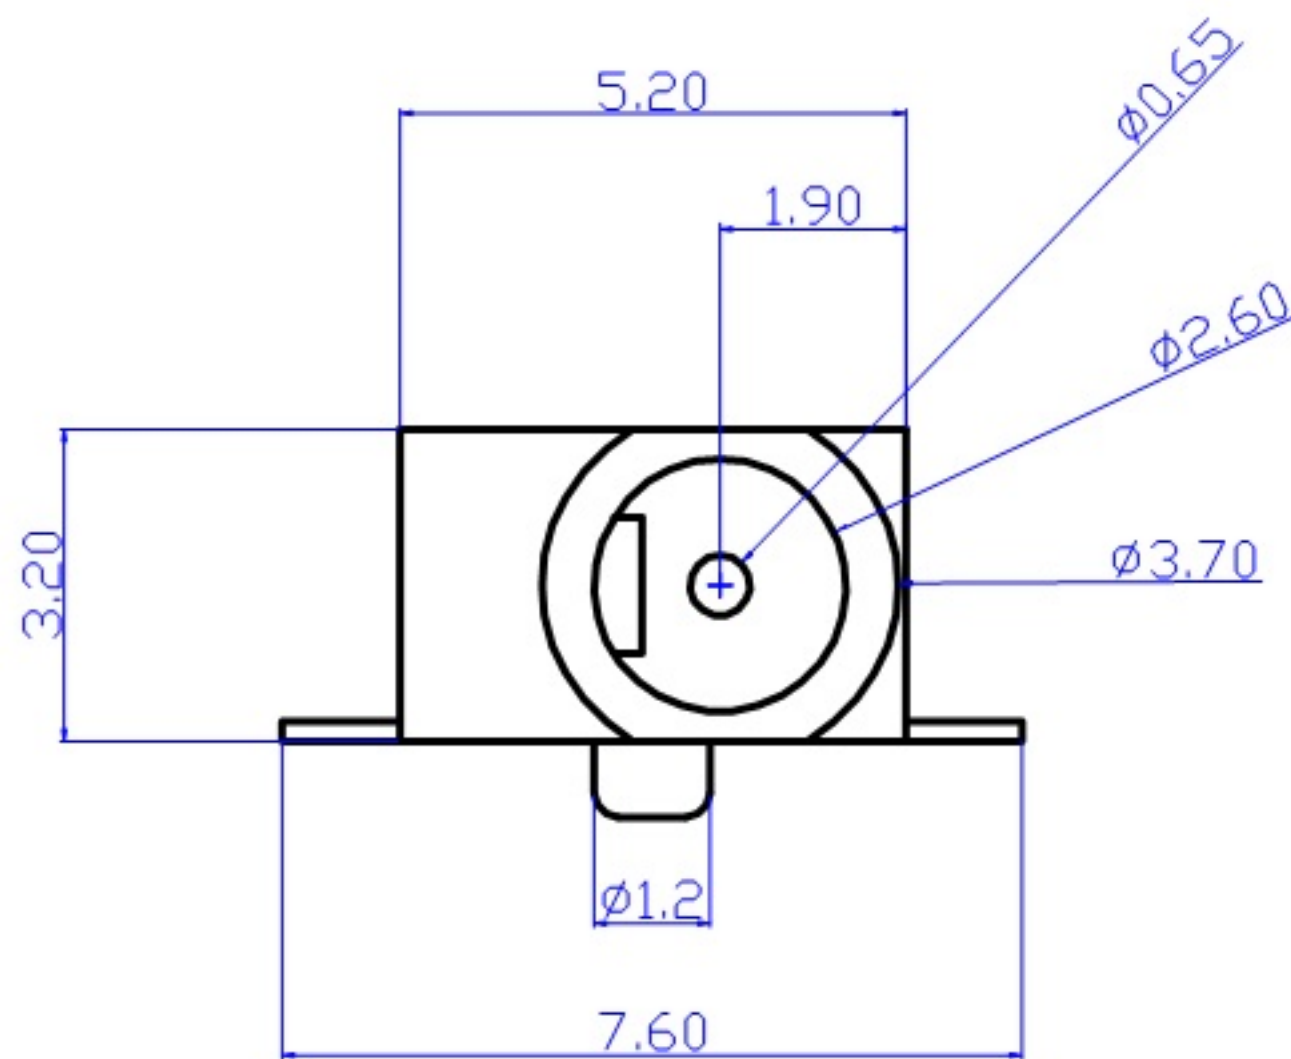


REV.	ECN. NO.	DESCRIPTION	ENG	DATE
A		INITIAL	Kai	2018.05.11
B		UPDATE VERSION	JEFF	2022.06.11

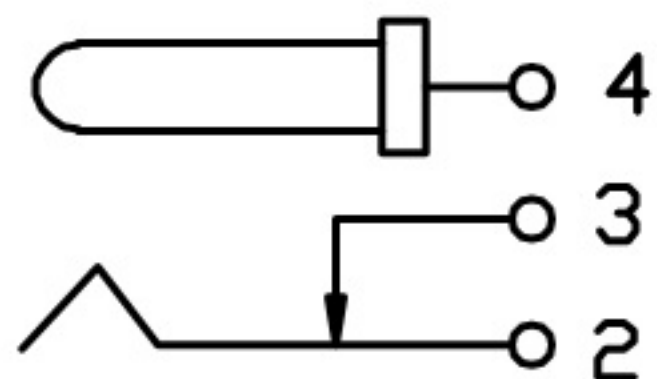

P.C.B LAYOUT TOP VIEW

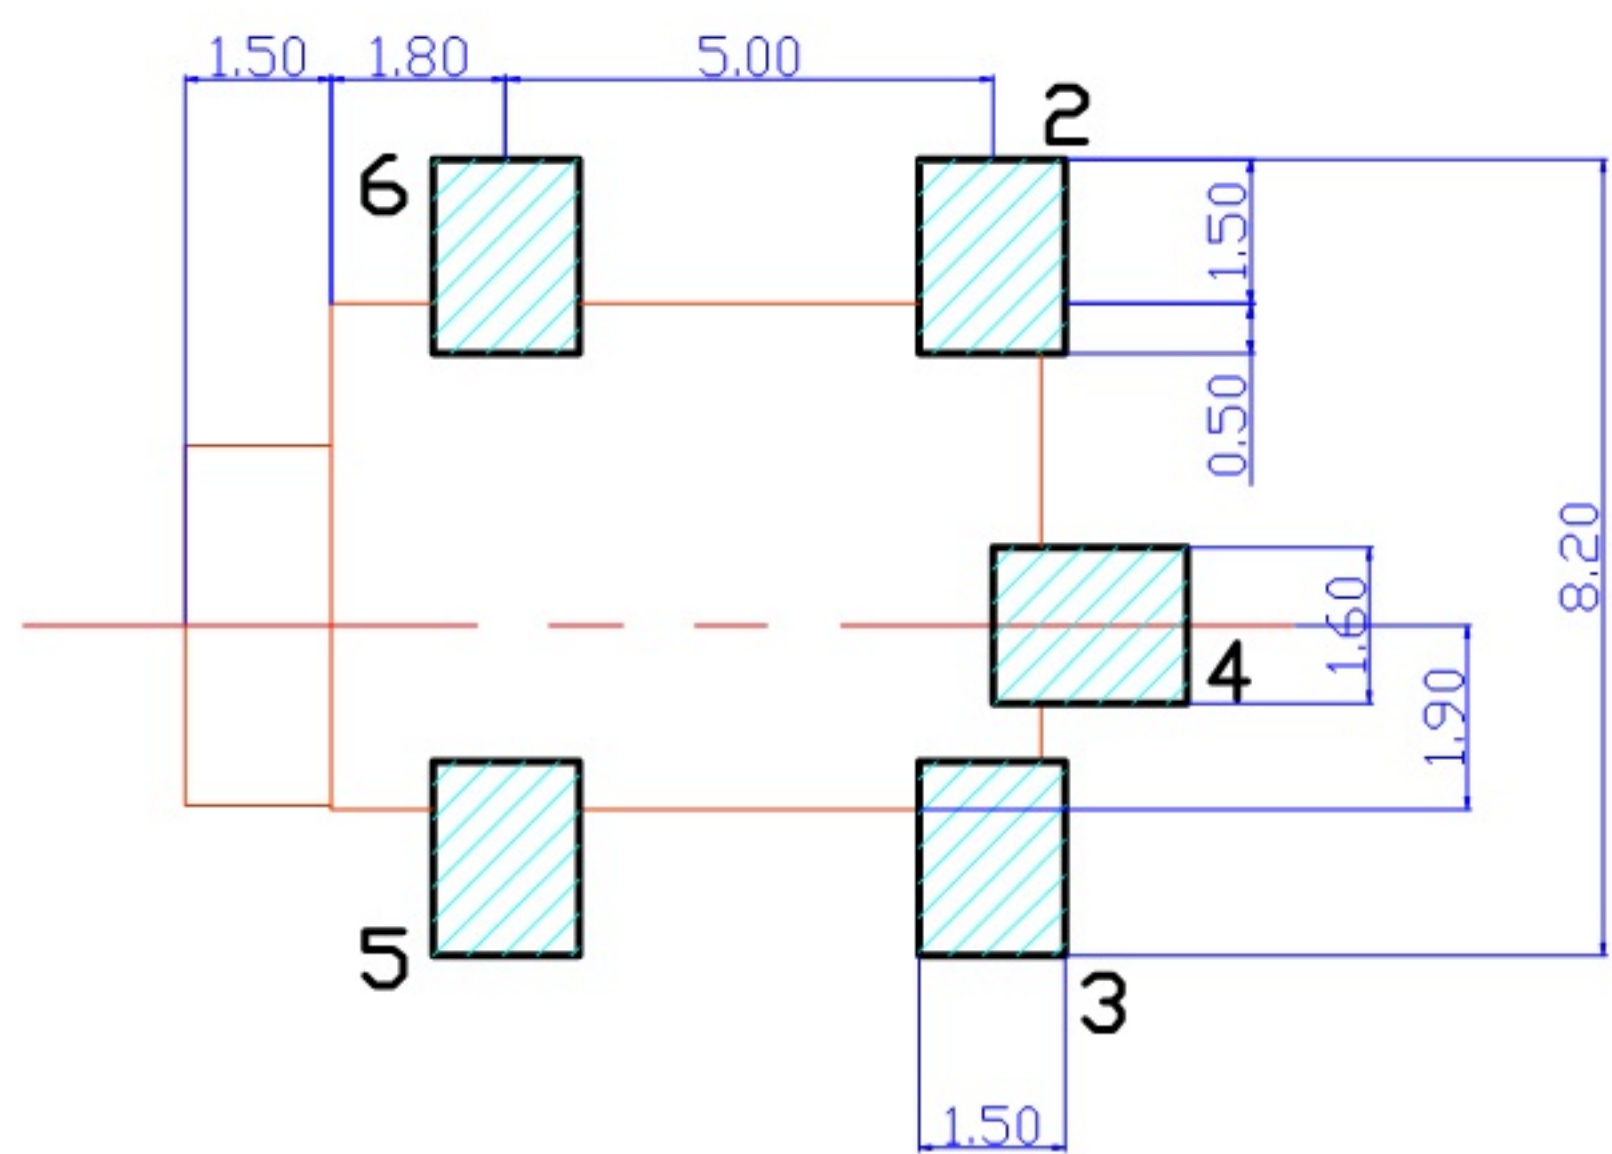

1. 额定电负荷: 30V 1.0A;
2. 接触电阻: <0.03Ω;
3. 绝缘电阻: >100MΩ;
4. 耐压: AC500V(50Hz)min;
5. 插拔力: 5-20N;
6. 寿命: 5000次
1. 未注线性公差:
0.0-10.0mm ±0.10mm
10.0-20.0mm ±0.15mm
20.0-50.0mm ±0.20mm
2. 外观应良好, 无锈蚀、裂痕、电镀不良等现象。

MEASURE POINT:
QUADRANT POINT (QP)
TANGENCY POINT (TP)
INTERSECTION POINT (IP)

UNLESS OTHERWISE SPECIFIED, TOLERANCE:
X. ±0.50
X.x ±0.30
X.xx ±0.20
X.xxx ±0.10
ANGULAR ±3°

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DESIGN:	DATE:	TITLE:
CHECKED:	DATE:	DC POWER JACK CONNECTOR
APPROVED:	DATE:	
PART NO. XB-DC-051	REV.: B	SCALE: 1:1
DRAWING NO.	SIZE: A4	SHEET: 1/1

3	CENTER PIN	1	BRASS;THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING.	
2	SHELL	1	PHOSPHOR BRONZE; THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING.	T=0.2
1	HOUSING	1	HIGH TEMPERATURE;COLOR BLACK	
ITEM	NAME	Q'TY	DESCRIPTION	NOTE