
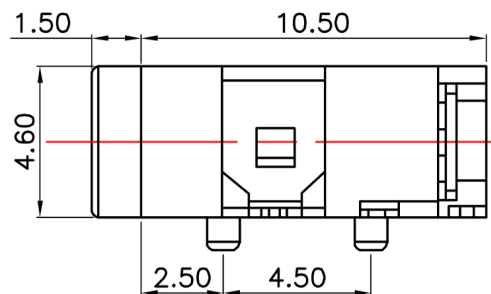
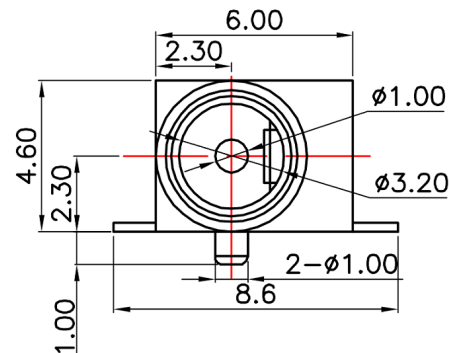




CAD FILE:

ROHS


Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:-20℃~70℃
Operating force:3~20N
Operating Life:5,000cycles



DC MATE PLUG

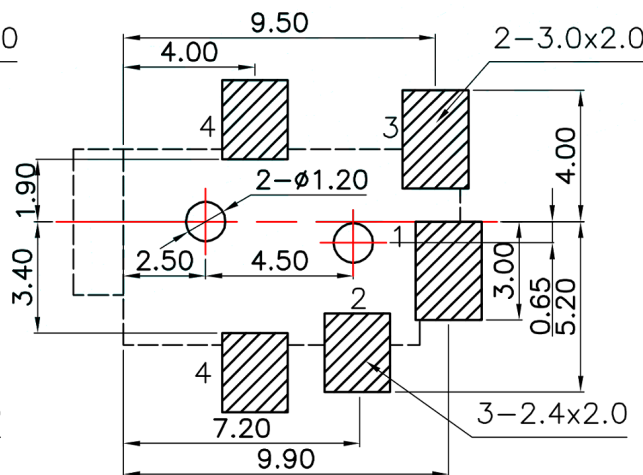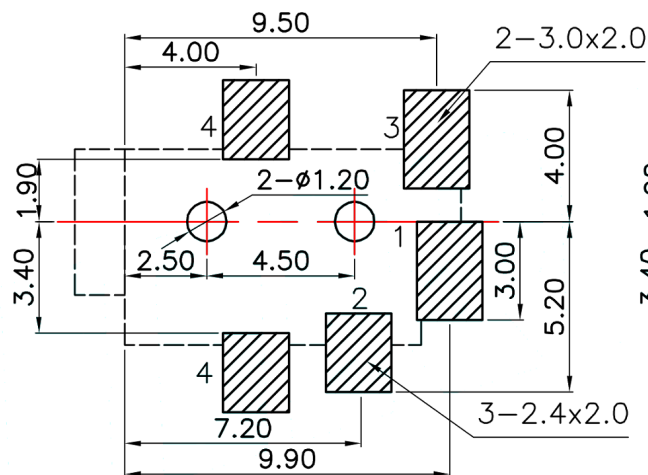

P.C.B LAYOUT(Copper-side view)

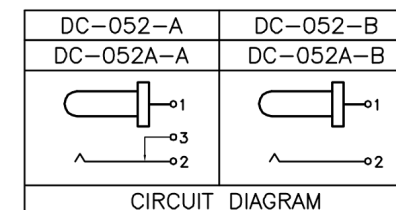

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : DC Power Jack			UNIT : mm	DRWG NO.: XB-DC-052
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-DC-052			SCALE: 5:1	DWN. JUN. YANG
2	COVER	STEEL STRIP	1	Ni PLATED					2012-9-25
1	KNOB	PPA	1	BLACK				CHK'D DONG. PANG	2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH				APPD. ZENQ. CHEN	2012-9-25